

## Low Noise Amplifier

50KHz-67GHz/5dB NF/25dB Gain/15dBm P1dB

Model: TLLA50K67G-25-50

TLLA50K67G-25-50 is a low noise amplifier with a typical small signal gain of 25 dB and a nominal noise figure of 5 dB across the frequency range of 50 KHz to 67 GHz. The DC power requirement for the amplifier is +12 V DC/300 mA. The input and output port configuration offers coax adapter structure with 1.85mm female.

### Features:

- Frequency range: 50KHz-67GHz
- Gain: 25dB Typ
- Noise Figure: 5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	50KHz-67GHz			
小信号增益 Small Signal Gain		25		dB
增益平坦度 Gain Flatness		±2		dB
噪声系数 Noise Figure		5		dB
线性输出功率 Output P1dB		15		dBm
输出三阶交调 Output IP3		20		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		300		mA
阻抗 Impedance	50			Ohms

## 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	1.85mm Female/1.85mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	35*40*12	mm

### 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

### 外形图 Outline Drawing:

Unit:mm

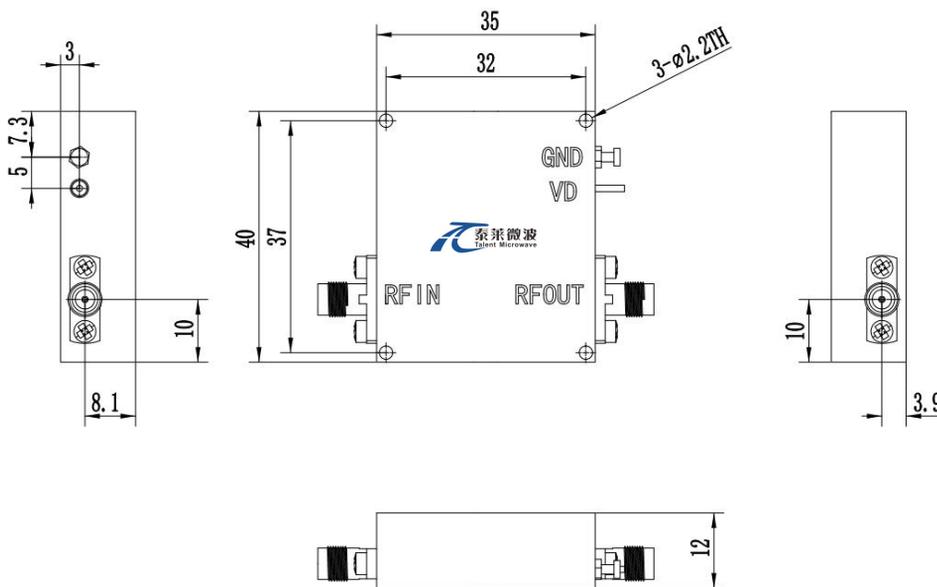

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

### 温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLLA50K67G-25-50	Low Noise Amplifier, 50KHz-67GHz, Noise Figure:5dB, Gain:25dB,P1dB:15dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA50K67G-25-50-HS	Low Noise Amplifier, 50KHz-67GHz, Noise Figure:5dB, Gain:25dB,P1dB:15dBm,+12V DC,With Heatsink	Rev.1.1

## 典型曲线 Typical Performance Data:

### Gain&VSWR vs Frequency

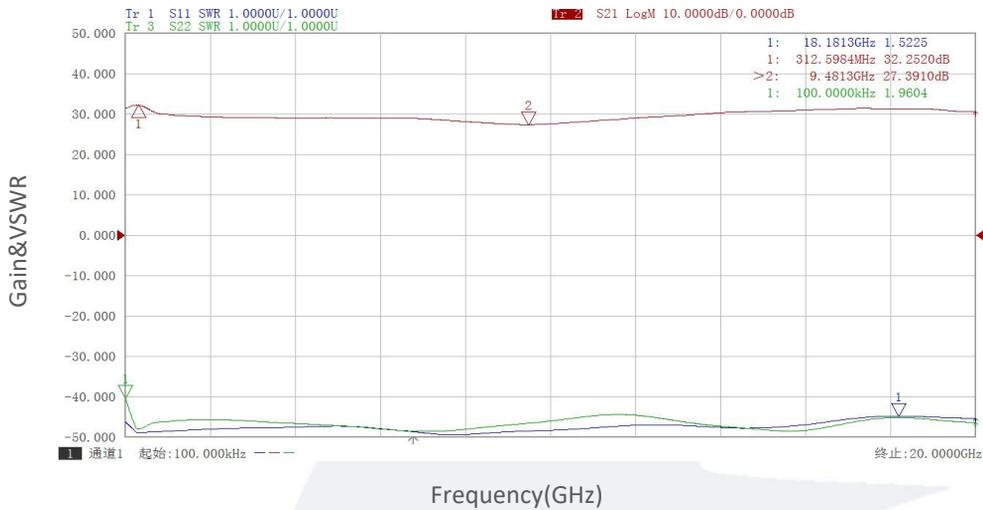


### Gain&VSWR vs Frequency

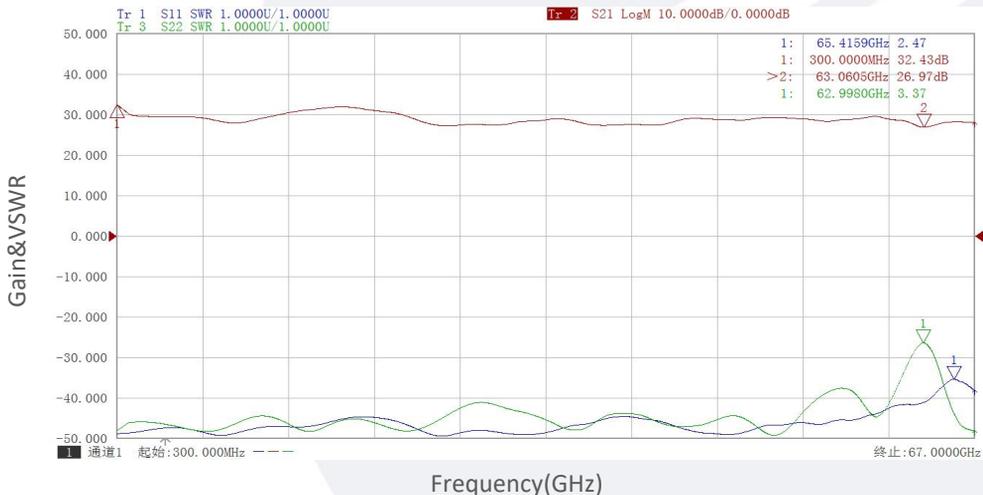


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:


### Noise Figure vs Frequency

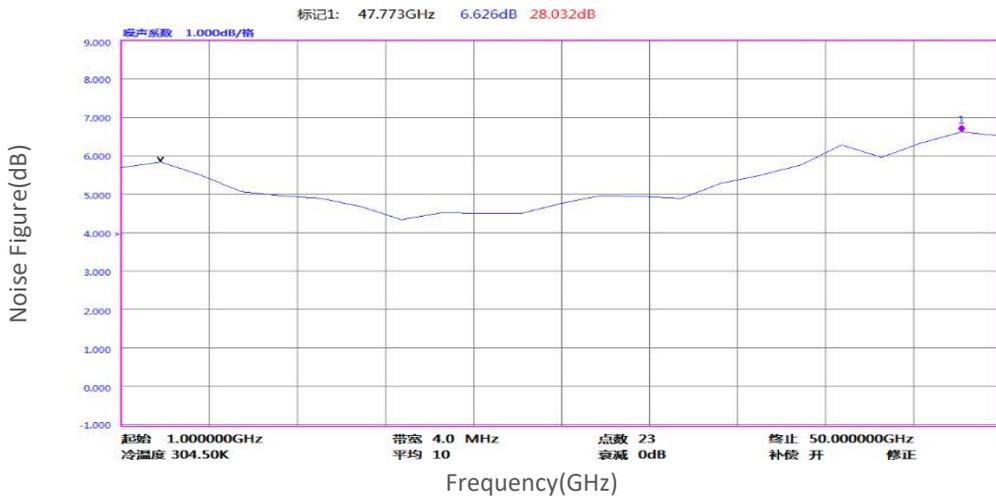

### Gain vs Output Power

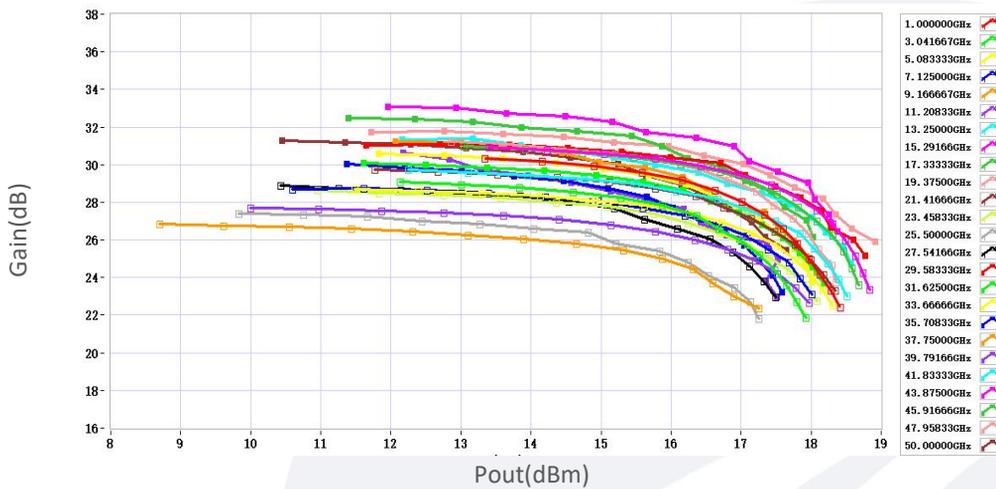


### P1dB vs Frequency

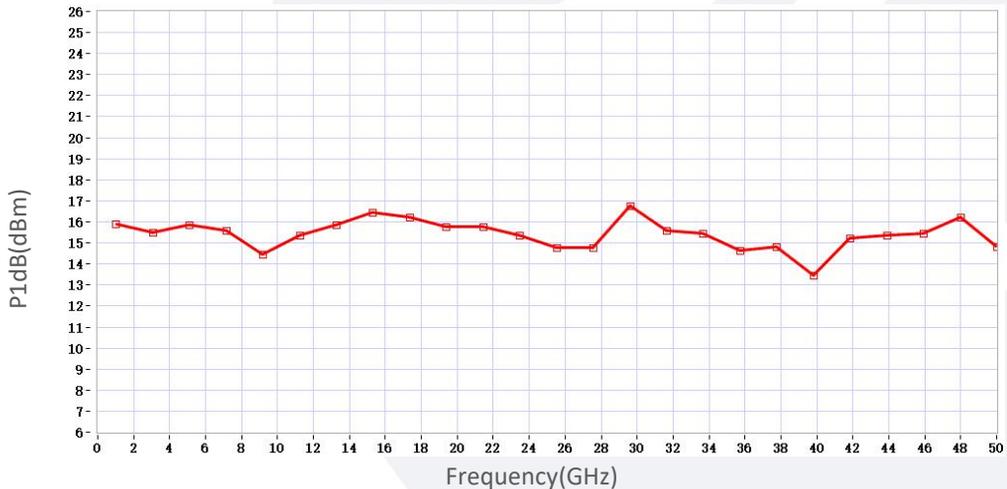

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

### P3dB vs Frequency

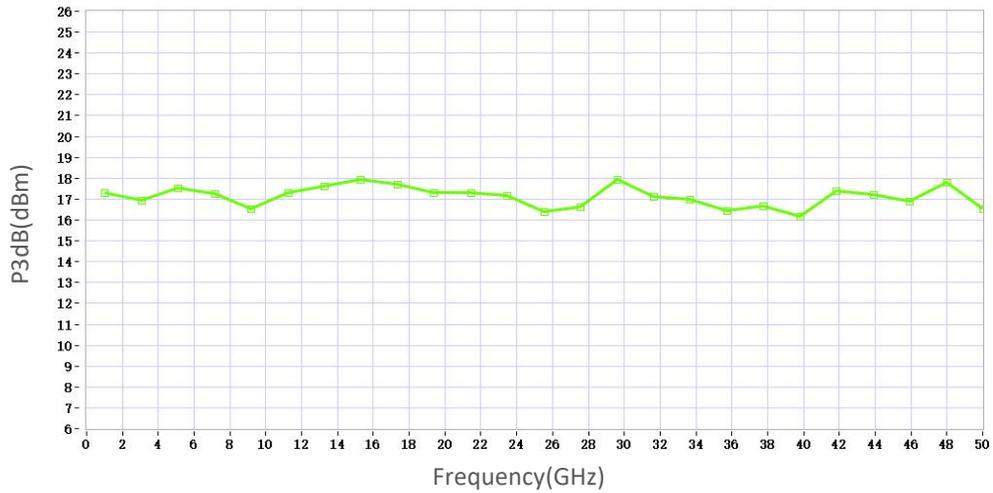

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.