

## Solid State High Power Amplifier Systems

32-36GHz/56dB Gain/56dBm Psat/380V AC

Model: TLPA32G36G-56-56-BC

TLPA32G36G-56-56-BC is a solid state high power amplifier systems provides high output power and high gain across the 32 to 36 GHz frequency range. The amplifier features a built-in 380V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

### Features:

- Frequency range: 32-36GHz
- Gain: 56dB Min
- Psat Output Power: 56dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection
- 50 Ohm Matched Input / Output

### Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	32-36			GHz
Power Gain@Pout=56dBm	GP	56			dB
Gain flatness	$\Delta$ GL		$\pm 3$		dB
Output Psat	Psat	56			dBm
Spurious@Pout=56dBm	Spur			-55	dBc
Input VSWR	VSWRin			2.0	:1
AC Voltage	Vac		380		V AC
Power Consumption	Pdiss		6000	6500	W
Impedance	I/O-IMP	50			Ohms

### Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92mm Female/WR28	
Forward/Reverse Coupling	2.92mm Female/2.92mm Female	
Communication Connector	DB9/RJ45	
Size	19 Inch 8U*550	mm
Weight	$\leq 80$	Kg

### Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

### Outline Drawing:

Unit:mm

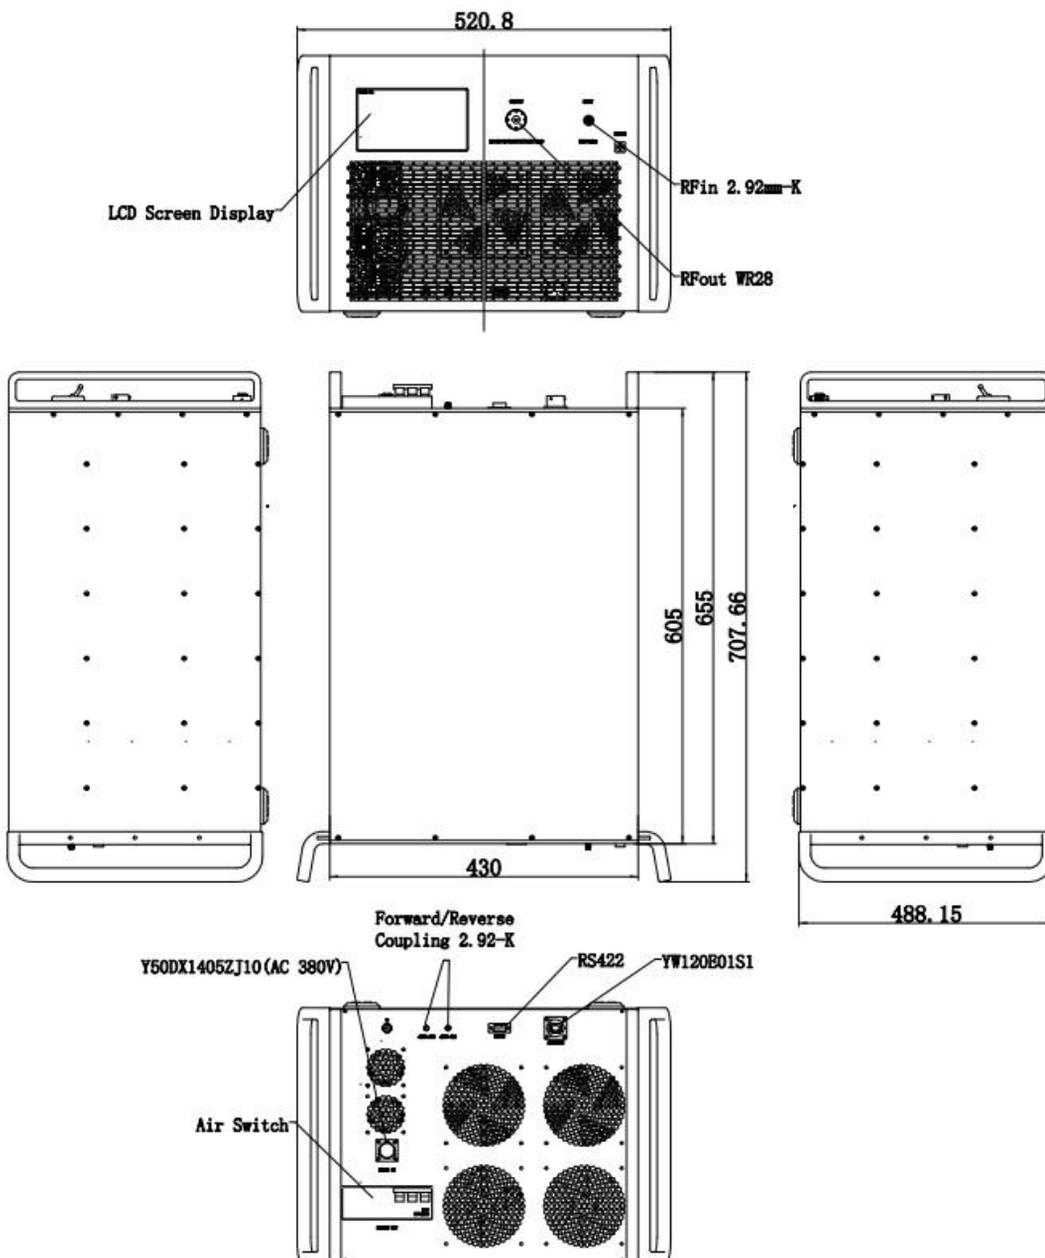

### Key Features:

Parameter	Advantages
Control functions	1, Power setting on/off 2, ALC automatic level control
Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Over VSWR
Display functions	1, Output/reflected power 2, Fault informations
Cooling system	Built in Cooling system, forced air cooling

### Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave, 3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

### Ordering Information:

Base Number	Description	Revision
TLPA32G36G-56-56-BC	Solid State High Power Amplifier Systems 32-36GHz, Gain:56dB, Psat:56dBm, 380V AC, Built in Fan Cooling	Rev.1.1