

Coaxial Inner-Outer DC Block

10MHz-18GHz/SMA/200V

Model:TDCBSMSF-18G-IO

The TDCBSMSF-18G-IO is a SMA coaxial inner-outer DC block that prevents the flow of DC current in the frequency range of 10 MHz to 18 GHz. The DC block has a maximum insertion loss of 0.8dB, a typical return loss of 18dB. It is manufactured with SMA male and female connectors for convenient circuit insertion. The breakdown voltage is +200 Volts..

Features:

- Operating Frequency 10MHz to 18GHz
- High Return Loss
- Low Cost
- Both an Inner and Outer DC Block

Applications:

- laboratory test
- Instrumentations
- System Integration

Electrical Characteristics:


Parameter		Min	Typ	Max	Units
Frequency Range		10MHz		18GHz	
Return Loss	@0.1-14GHz		-26.4	-16.5	dB
	@14-18GHz		-18.5	-15.5	
Insertion Loss			0.4	0.8	dB
Breakdown Voltage			200		V
Impedance			50		Ohms

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-65 to +125°C	
Storage Temperature	-65 to +125°C	
Input Connector	SMA Female	
Output Connector	SMA Male	
Length	32.2	mm

Outline Drawing:

Unit:mm

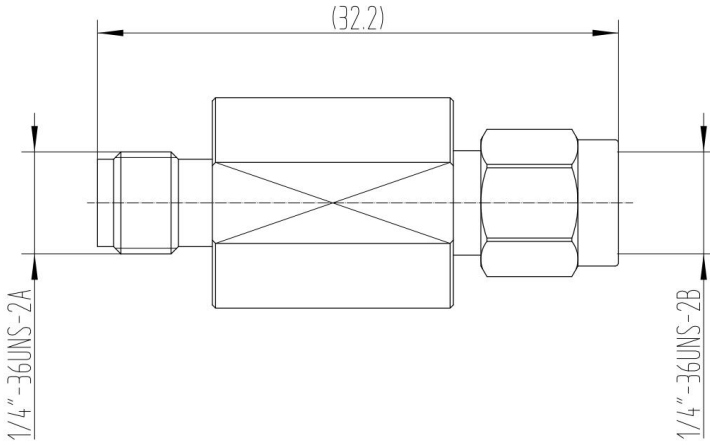


Ordering Information:

Base Number	Description
TDCBSMSF-18G-IO	10MHz-18GHz,200V,SMA Coaxial Inner-Outer DC Block

Typical Performance Data:

VSWR&Insertion Loss vs Frequency

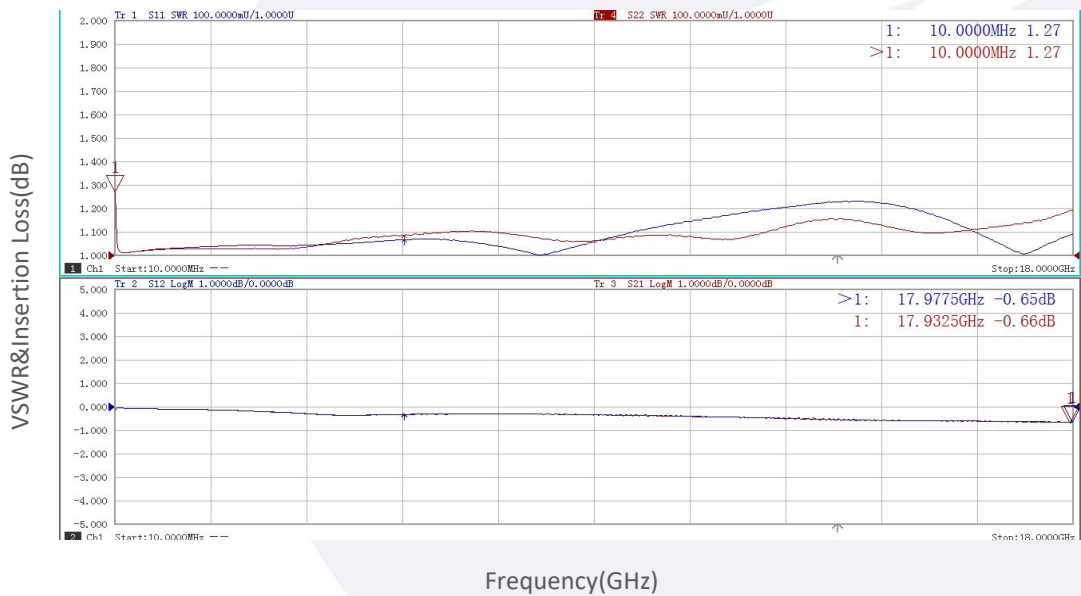

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.