

Power Amplifier

WR-12/75-80GHz/15dB Gain/17dBm Psat

Model: TMPA-075080-1517-12

TMPA-075080-1517-12 is a power amplifier with a typical small signal gain of 15 dB and a nominal Psat of 17 dBm across the frequency range of 75 to 80 GHz. The DC power requirement for the amplifier is +12 VDC. The input and output port configuration offers an inline structure with WR-12 waveguides and UG-387/U-M antcocking flanges.

Features:

- Frequency range: 75-80GHz
- Gain: 15dB Typ
- Output Power Psat: 17dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	75		80	GHz
Small Signal Gain		17		dB
Output Psat		15		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		12		V DC

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-12/UG-387/U	
DC Bias	Solder Pin	
Size	39*30*23	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

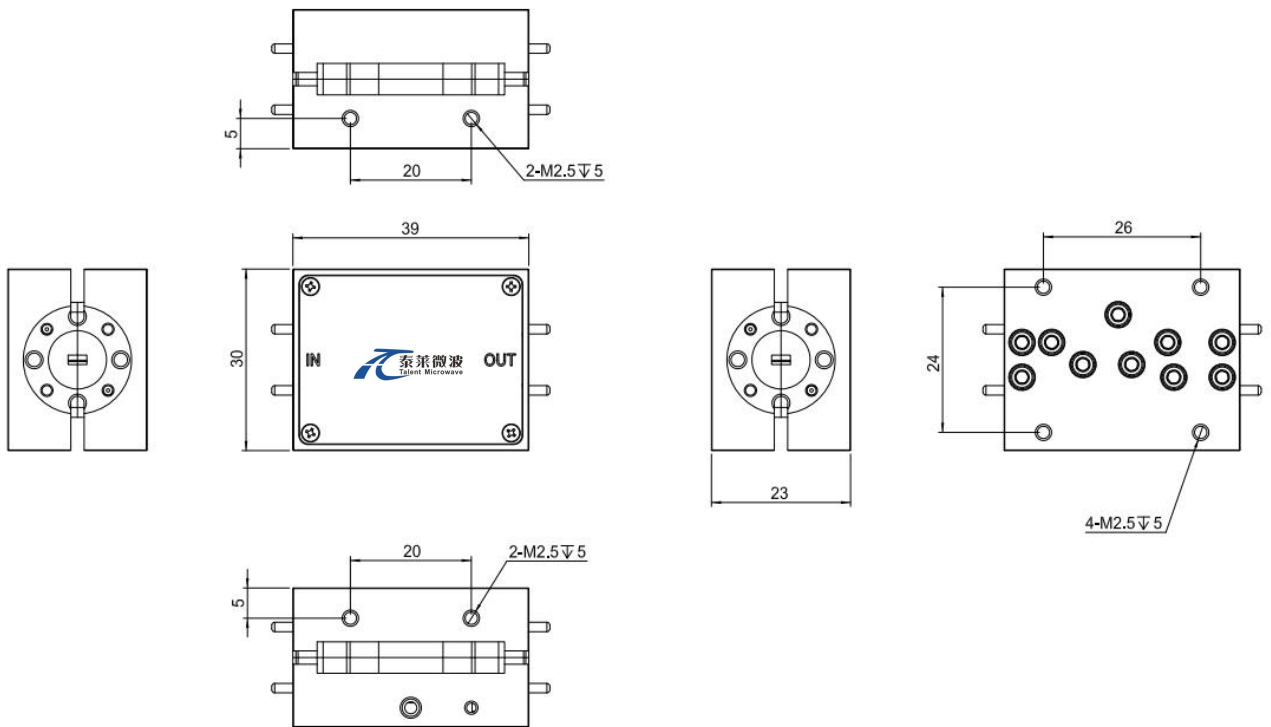

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-075080-1517-12	Power Amplifier, 75-80GHz, Gain: 15dB Type, P _{sat} : 17dBm Type, +12V DC,WR-12	Rev.1.0