

Comb Generator

3-67GHz

Model: TLCG3G67G-V

This TLCG3G67G-V is designed to provide stable, high purity equidistant frequency comb signals. It operates within 3 GHz to 67 GHz. Featuring low phase noise, high stability and excellent spectral purity, the module delivers reliable multitone output. Widely used in spectrum testing, frequency calibration, microwave measurement and communication system verification.

Features:

- Output harmonic Frequency range:3-67 GHz
- 50 Ohm Matched Input / Output

Applications:

- Communication receiver
- Laboratory test
- Sensor radar

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Input Frequency range		3		15	GHz
Input Power		18		25	dBm
Output Frequency range		3		67	GHz
Maximum Output Harmonic Factor	@Input=3GHz			22	
	@Input=5GHz			13	
	@Input=10GHz			6	
	@Input=15GHz			4	
阻抗 Impedance		50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/1.85mm Female	
Size	17*17*9	mm

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+25 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

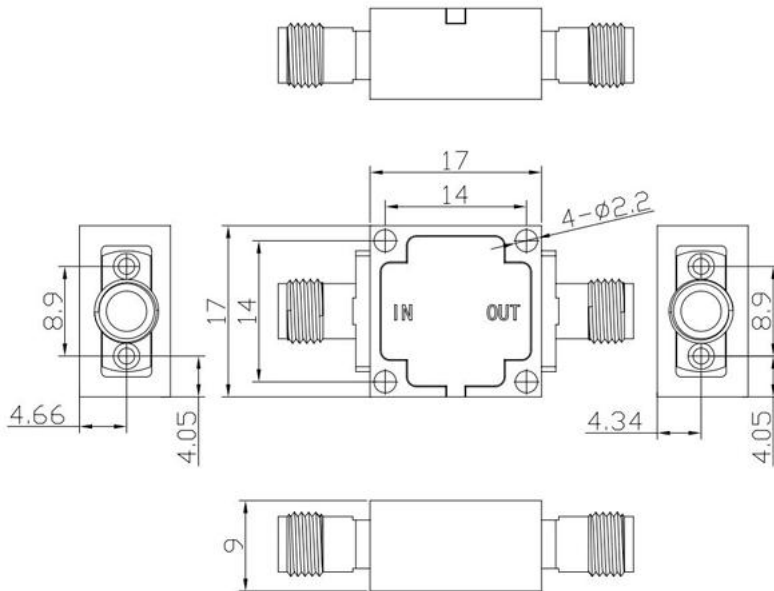

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


Ordering Information:

Base Number	Description	Revision
TLCG3G67G-V	Comb Generator, 3-67GHz	Rev.1.0

Typical Performance Data:


3GHz:

Pout vs Frequency

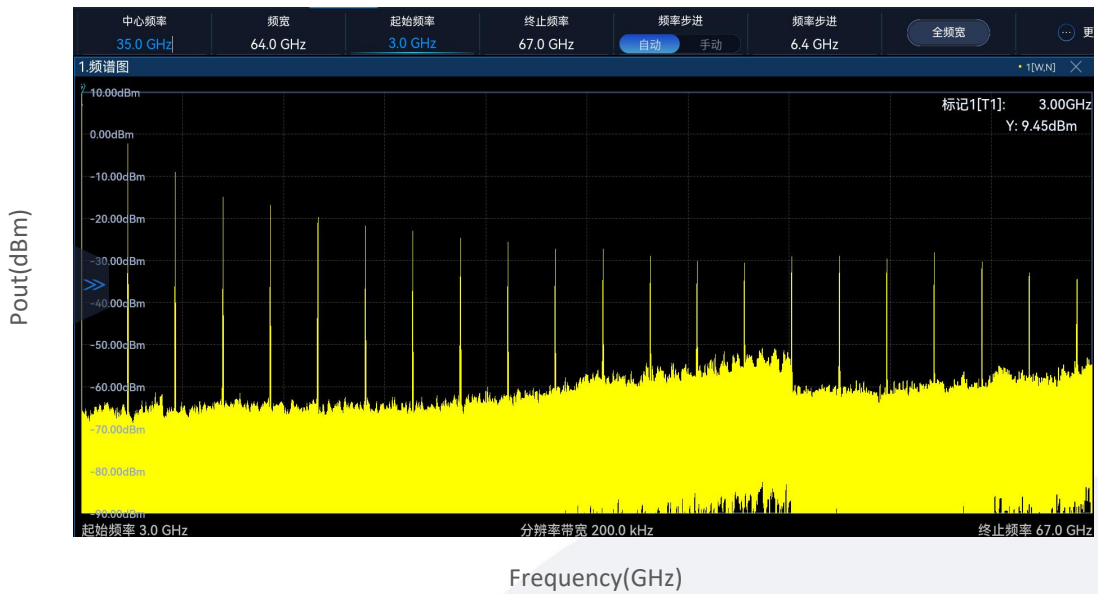

5GHz:

Pout vs Frequency

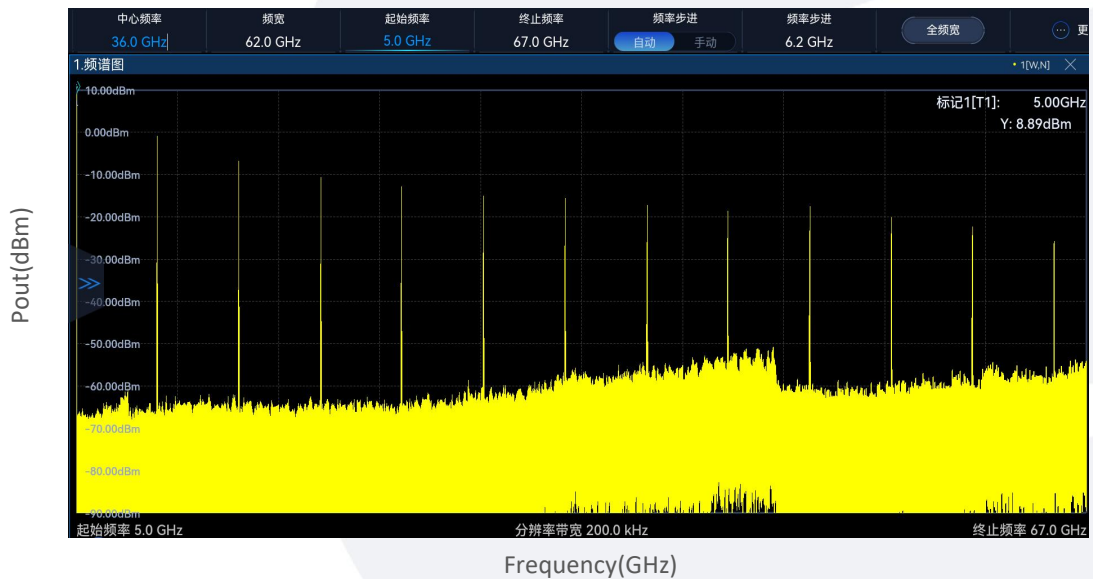


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


10GHz:

Pout vs Frequency

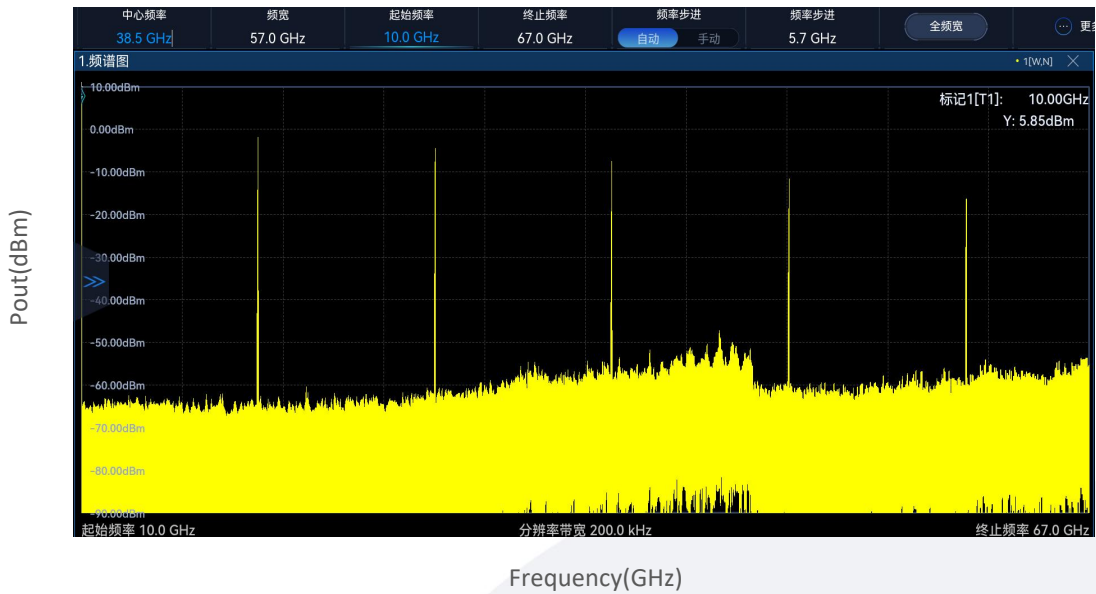

15GHz:

Pout vs Frequency

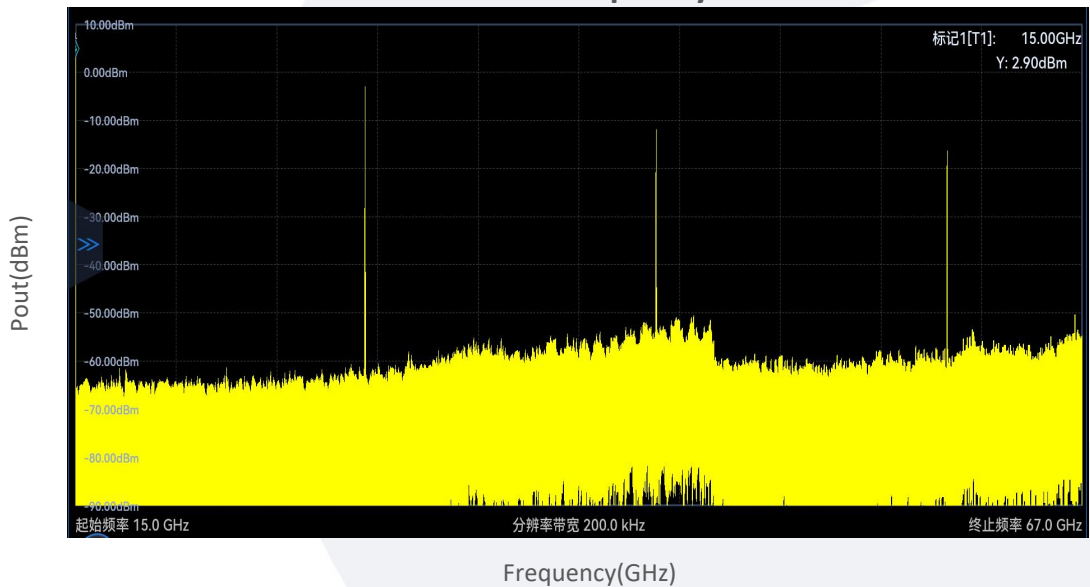

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.