

Power Amplifier

0.1-22GHz /35dB Gain/28 dBm Psat

Model: TLPA0.1G22G-35-28

TLPA0.1G22G-35-28 is a power amplifier with a typical small signal gain of 35 dB and Psat of 28 dBm across the frequency range of 0.1 to 22 GHz. The DC power requirement for the amplifier is +24 VDC/0.85 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 0.1-22GHz
- Small Signal Gain: 35 dB Typ
- Output Power Psat: 28 dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.1		22	GHz
Small Signal Gain	33	35		dB
Gain Flatness		±5		dB
Output P1dB		26		dBm
Output Psat		28		dBm
Input VSWR		2	3	:1
Output VSWR		2	3	:1
DC Voltage		24	25	V DC
DC Supply Current		850		mA
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
Size	60*65*11(Without Heatsink) 60*90*41(With Heatsink)	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+25V
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

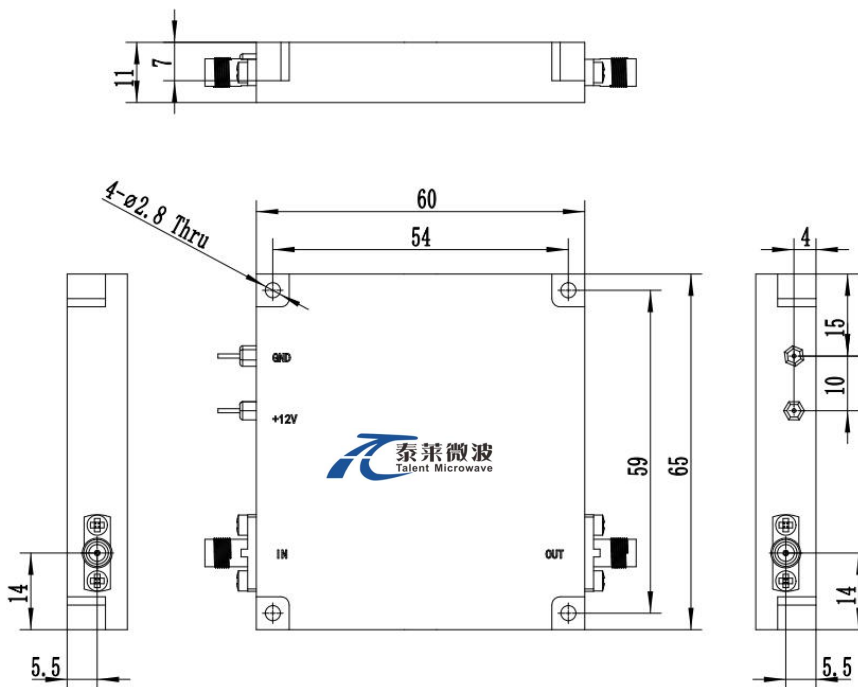


*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Outline Drawing:

Unit:mm

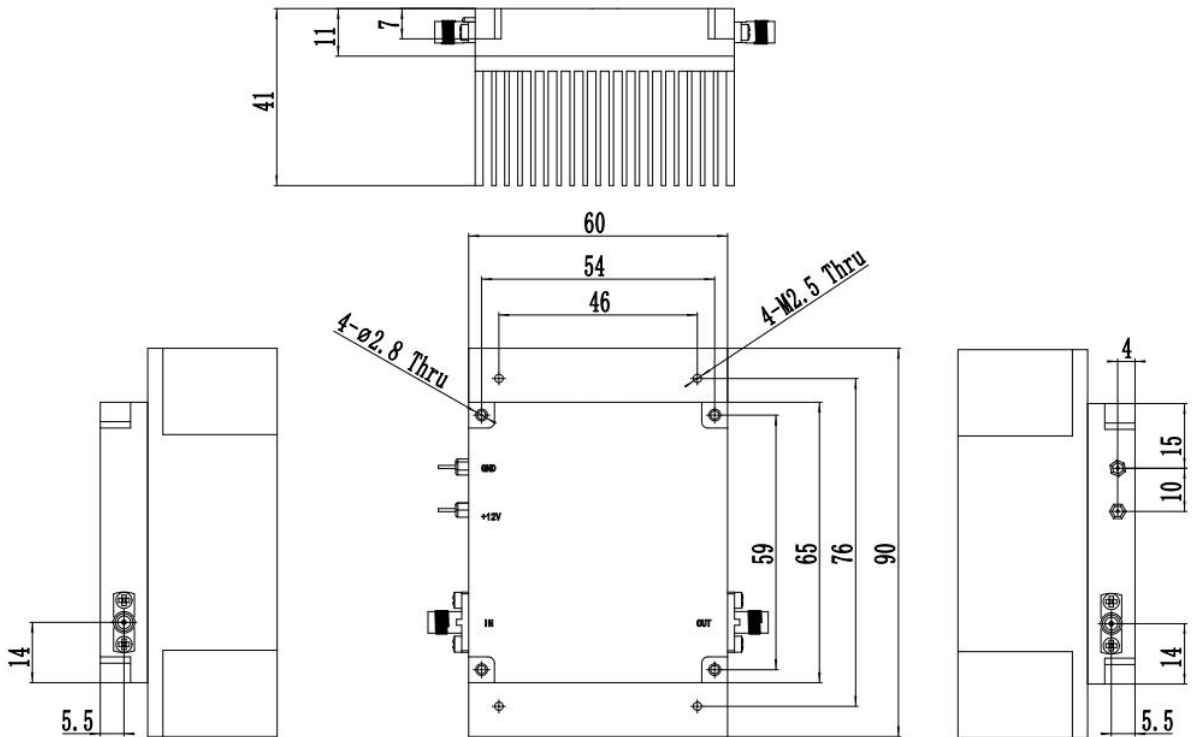

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLPA0.1G22G-35-28	Power amplifier 0.1-22GHz, Gain:35dB,Psat:28dBm,+24V DC,Without Heatsink	Rev.1.1
TLPA0.1G22G-35-28-HS	Power amplifier 0.1-22GHz, Gain:35dB,Psat:28dBm,+24V DC,With Heatsink	Rev.1.1

Typical Performance Data:

VSWR&Gain vs Frequency

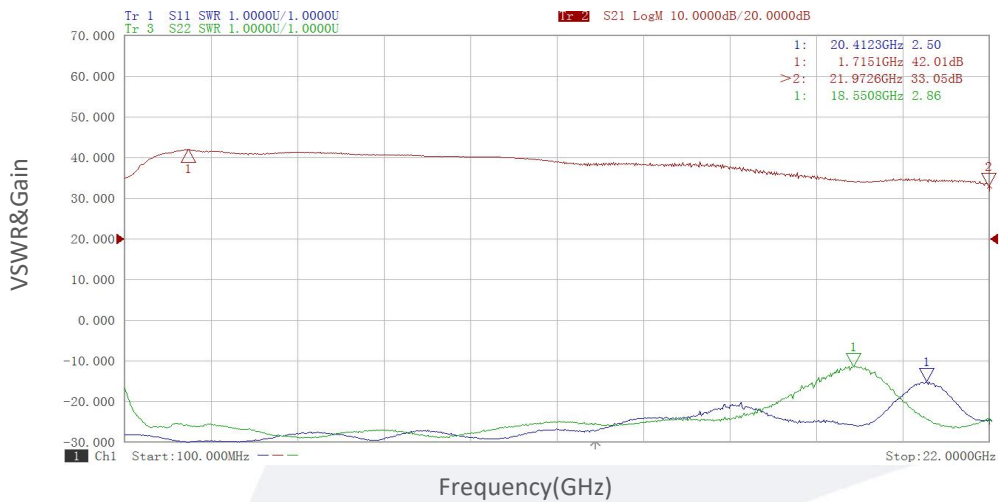


Gain vs Output Power

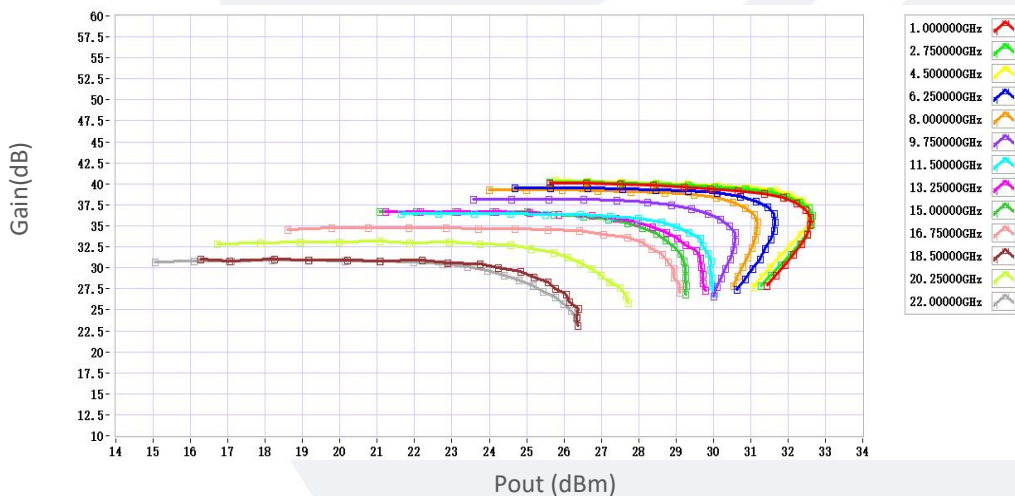


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


P1dB vs Frequency

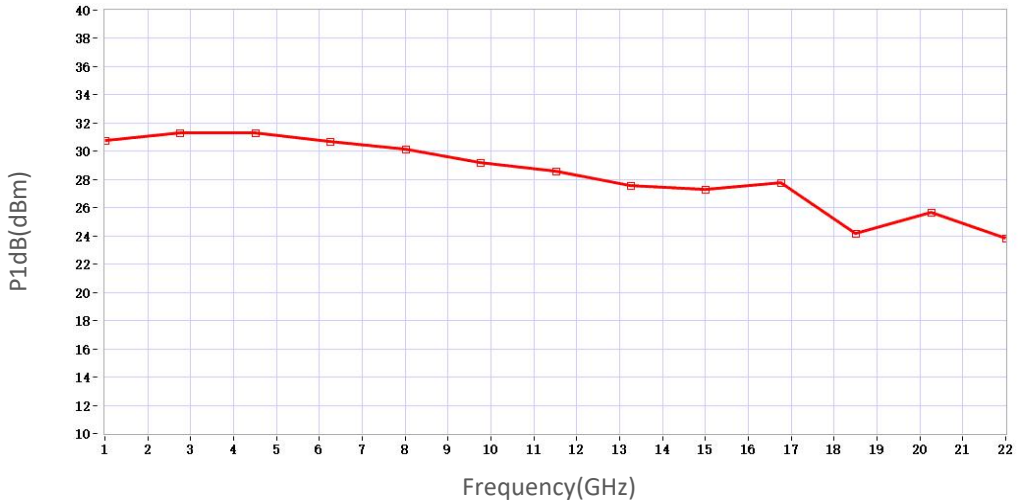

P3dB vs Frequency

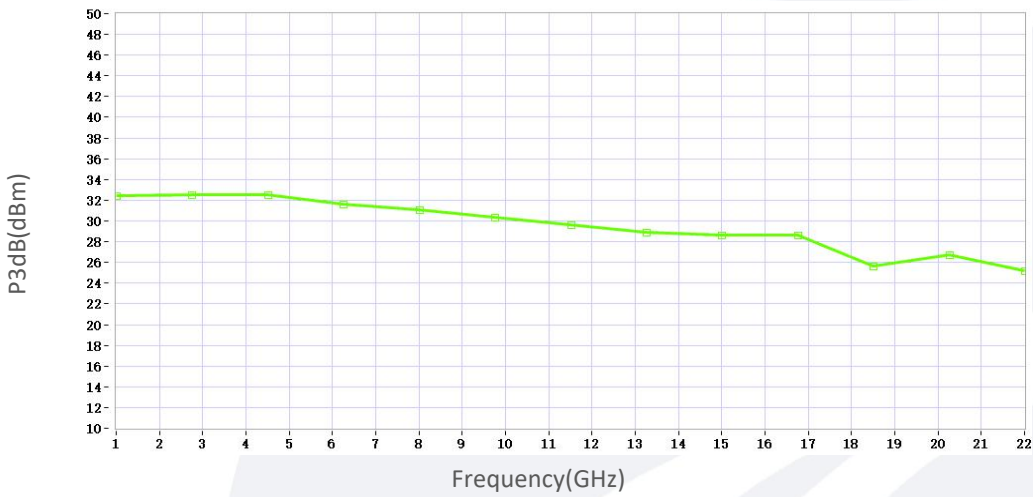

Psat vs Frequency

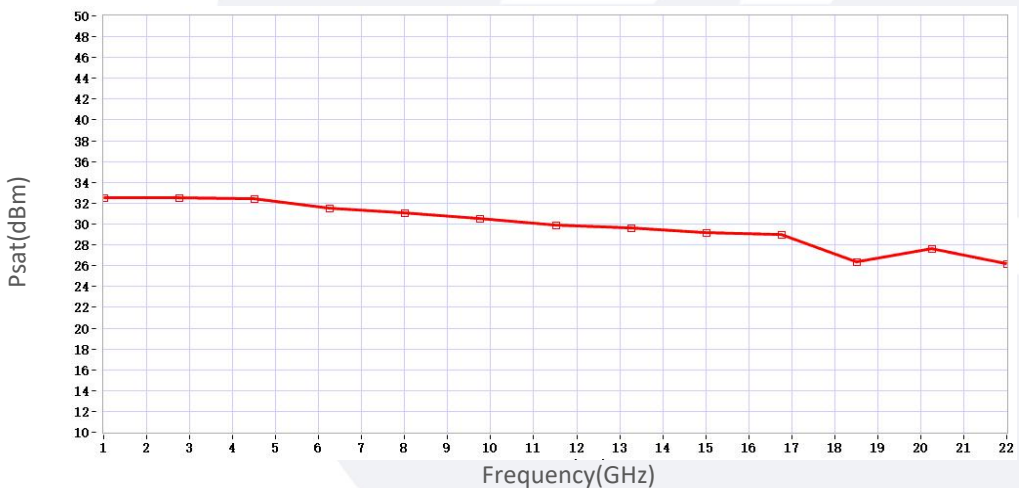

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.