


Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~40GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.25
Insertion Loss	≤0.60dB
Operating Temperature	- 55~+125℃


Material & Coat-Plating

Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body	Stainless steel, Passivation
Nut	Stainless steel, Passivation

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	APVD	Product Model 2.92-JWKS 2.92mm Male-RA to 2.92mm Female Adaptor			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE 0T8L4	DRAWING NO	
		CUSTOMER DRAWING			SHEET1 OF 1	RVE 1

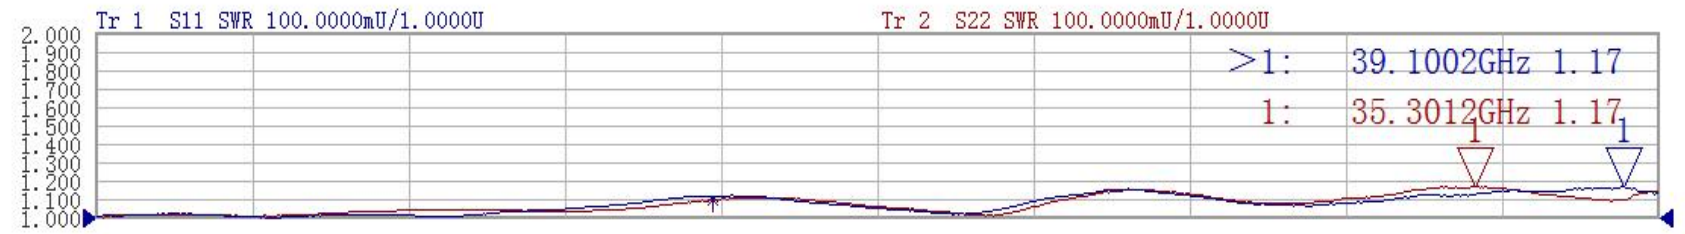

1 通道1 起始:10.0000MHz --- 终止:40.0000GHz

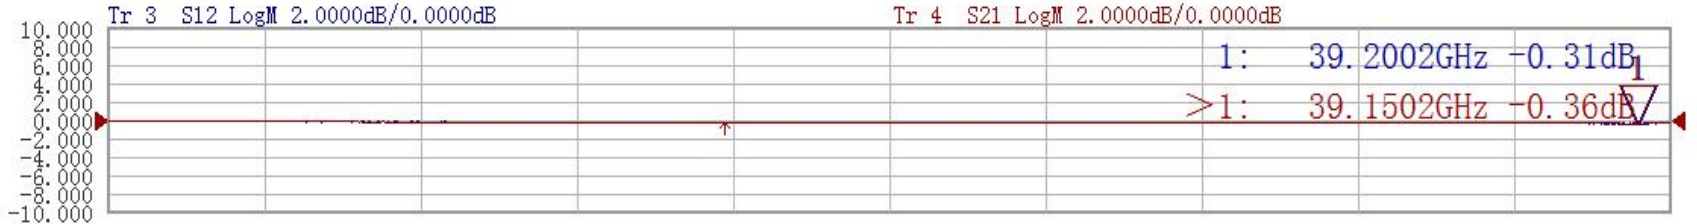

2 通道1 起始:10.0000MHz --- 终止:40.0000GHz

	扫描类型	起始频率 (GHz)	终止频率 (GHz)	扫描点数	中频带宽 (Hz)	扫描时间 (s)	端口1,2功率 (dBm)
通道1	线性扫描	0.010000000	40.000000000	801	1000	1.000000	-5.00, -5.00