

W-Band Frequency Extender

67-110GHz /WR-10

Model: TLSE-067110-1730-10

TLSE-067110-1730-10 frequency extenders are a dedicated Test & Measurement solution for extending the range of your signal source to 67-110 GHz.

Features:

- Frequency range: 67-110 GHz
- Output Power : 17 dBm Typ
- Low power consumption

Applications:

- Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	67		110	GHz
Output Power		17		dBm
Dynamic Range (Optional mechanical Attenuator)		30		dB
Input Frequency	11.16		18.33	GHz
Input Power		+5	+10	dBm
Multiply Factor		6		dB
Harmonic Suppression		-20		dBc
Input VSWR		2		:1
Output VSWR		2		:1
Supply Voltage	100	220	240	V

Mechanical Specifications:


Parameter	Value	Units
REF Input Connector	SMA Female	
Control Interface	SPI	
RF Output Connector	WR-10/UG-387/U	
Power Supply Pin	FGG 0B 4 Core	
Size	150*65*50	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+240 V AC
RF Input Power	+10 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

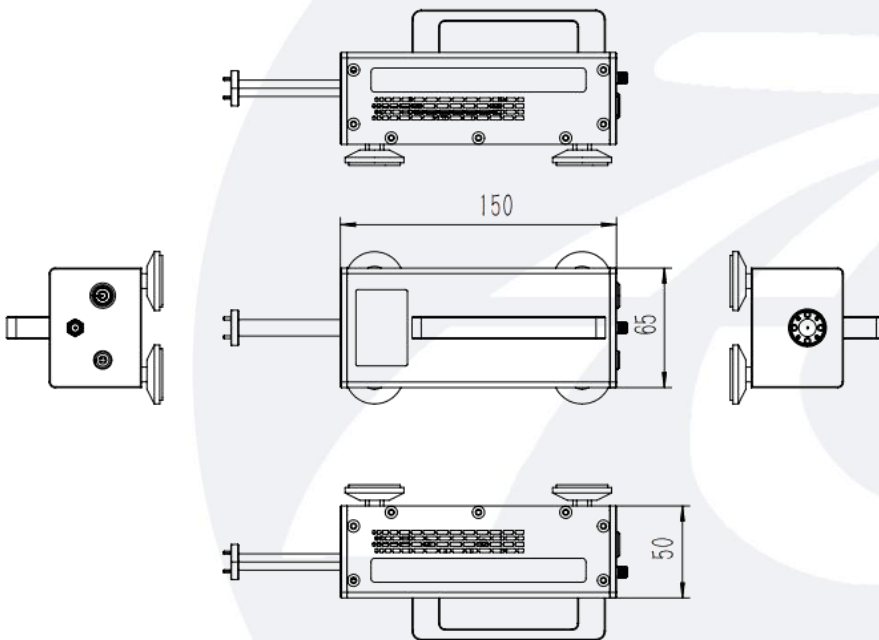

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TLSE-067110-1730-10	W-Band Frequency Extender,X6,67-110GHz, Output Power: 17dBm Typ,Equipped with an adjustable attenuator and isolator internally	Rev.1.2

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS