

## Adjustable Phase Shifter

### DC-3GHz/3.5mm Female

**Model: TLMP5-3G-180-S**

TLMP5-3G-180-S is a phase shifters is adjustable passive microwave devices designed for RF applications. TLMP5-3G-180-S have a phase range of 0° to 180° and a phase adjustment of 4.8° per GHz.

#### Features:

- Operating Frequency DC to 3GHz
- High phase adjustmant accuracy
- Low insertion loss

#### Applications:

- laboratory test
- Communication equipment

#### Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	DC		3	GHz
Power Handling		50		W
Impedance		50		Ohms
<b>Apply 1</b>	Assemble semi-rigid cable, set one channel of phase adjustment range from 0~180°			
VSWR		1.3	1.35	:1
Insertion Loss		0.8	0.9	dB
Phase adjustment range	0		180	°/GHz
Phase Sensitivity		4.8 x f (GHz)		°/Circle
Group Delay		500		ps
<b>Apply 2</b>	Assemble semi-rigid cable, set one channel of phase adjustment range from 0~90°			
VSWR		1.15	1.25	:1
Insertion Loss		0.35	0.45	dB
Phase adjustment range	0		90	°/GHz
Phase Sensitivity		2.4 X f (GHz)		°/Circle
Group Delay		250		ps

### Environmental And Physical Characteristics:

Description	Parameter	Units
Connectors	3.5mm Female/3.5mm Female	
Size	180*100*26.8	mm

### Outline Drawing:

Unit:mm

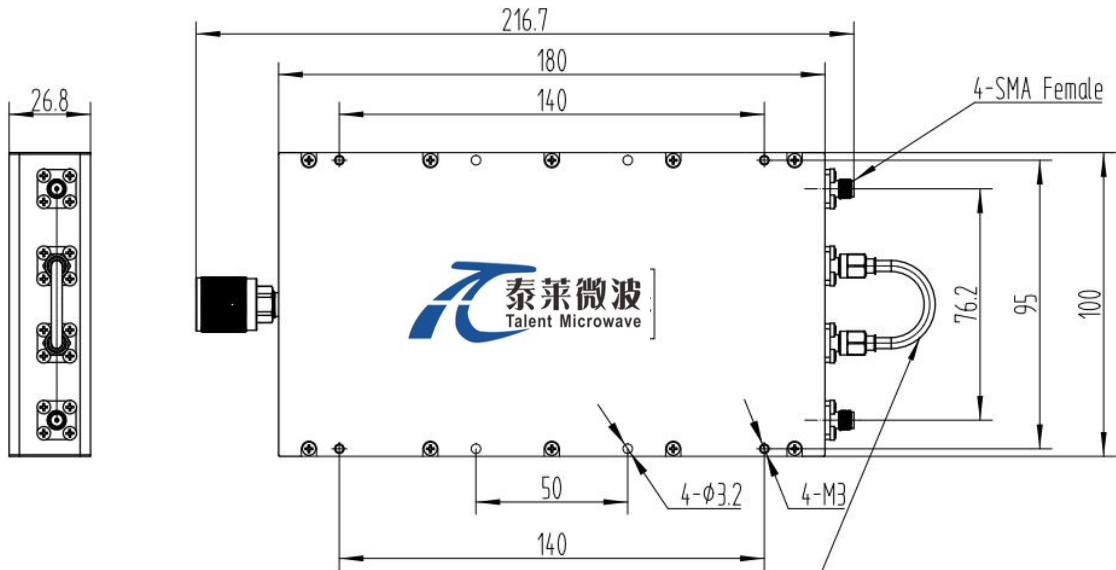

The phase adjustment range of this semi-rigid assembly is 180° at 1 GHz.  
After removal, it can be divided into two groups, with a phase adjustment range of 90° at 1 GHz.


### Ordering Information:

Base Number	Description	Revision
TLMP5-3G-180-S	Adjustable Phase Shifter, DC-3GHz,Phase adjustment: 4.8° per GHz.	Rev.1.0

### Typical Performance Data:


0° :

### VSWR&Phase&Group Delay vs Frequency

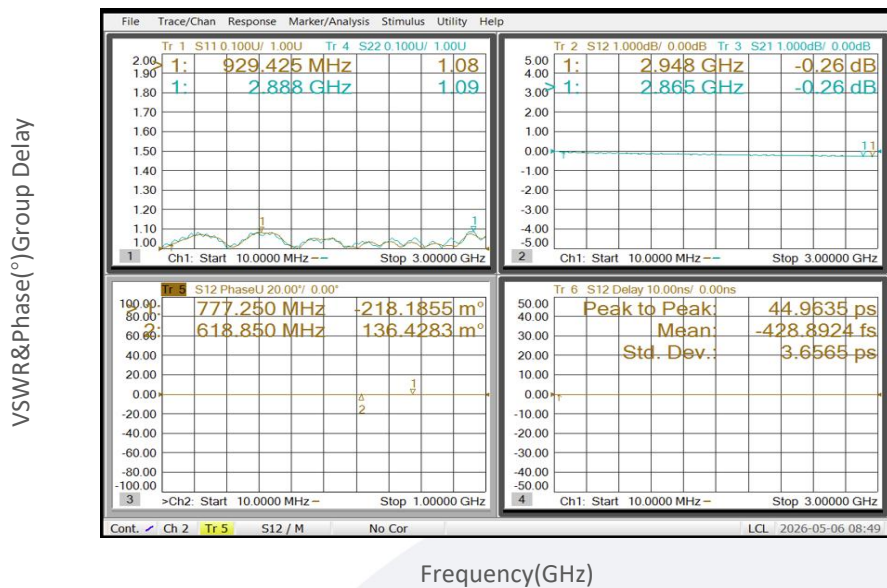

90° :

### VSWR&Phase&Group Delay vs Frequency

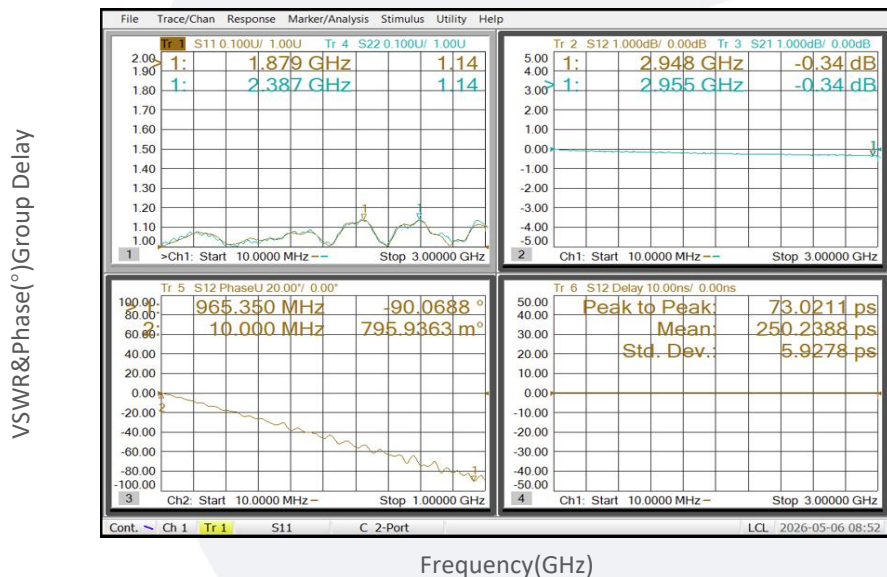


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

**Typical Performance Data:**


0° :

**VSWR&Phase&Group Delay vs Frequency**

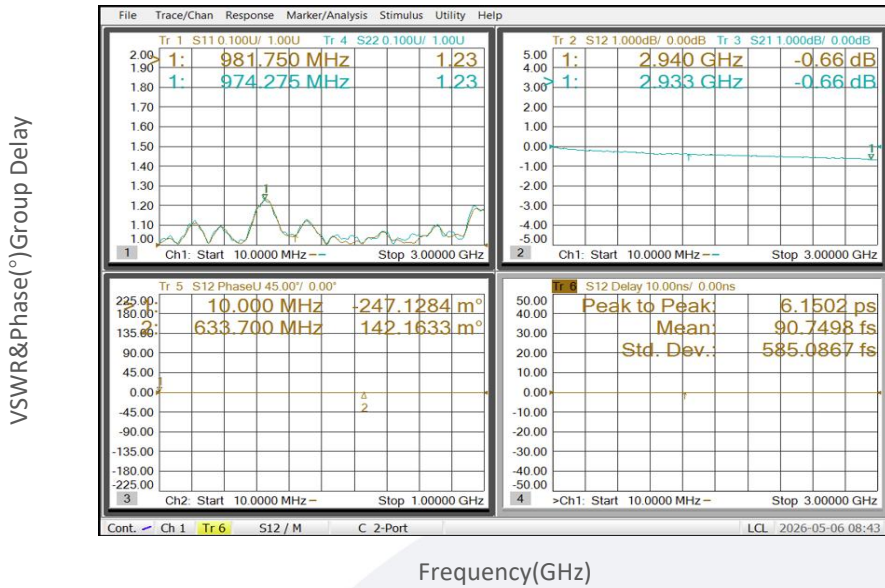

180° :

**VSWR&Phase&Group Delay vs Frequency**

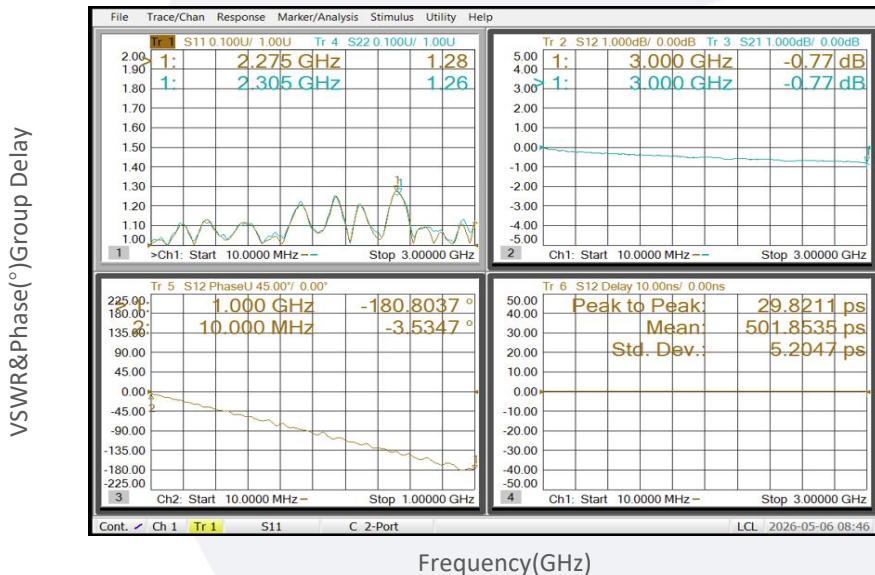

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.