

## Power Amplifier

0.5-8GHz/35dB Gain/33dBm Psat

Model: TLPA0.5G8G-35-33

TLPA10M2G-30-30 is a power amplifier with a typical small signal gain of 35 dB and a nominal Psat of 33 dBm across the frequency range of 0.5 to 8 GHz. The DC power requirement for the amplifier is +28 VDC/500 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 0.5-8GHz
- Gain: 35dB Typ
- Output Power Psat: 33dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

### 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.5		8	GHz
小信号增益 Small Signal Gain	33	35		dB
增益平坦度 Gain Flatness		±3		dB
饱和输出功率 Output Psat	32	33		dBm
谐波 Harmonic			-10	dBc
杂散 Spurious			-60	dBc
输入驻波 Input VSWR		1.5	2	:1
直流电压 DC Voltage	+26	+28	+30	V DC
直流电流 DC Supply Current		500	1200	mA
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	90.2*70*15	mm


## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+30 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



## 外形图 Outline Drawing:

Unit:mm

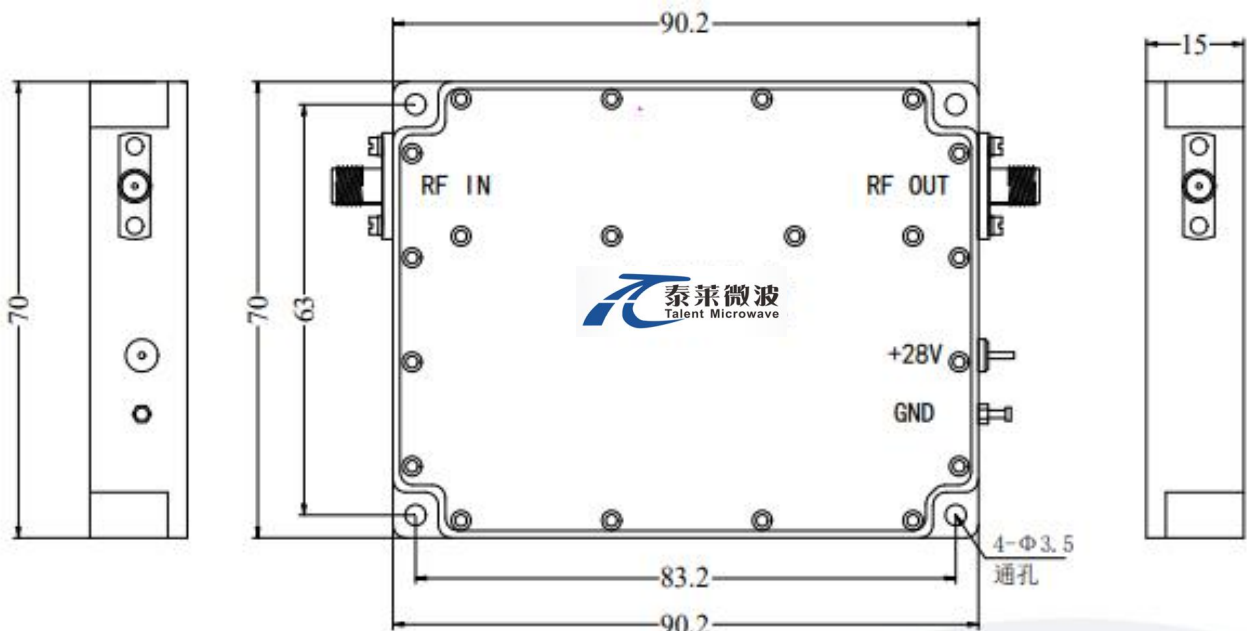

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:




标准型号 Base Number	描述 Description	版本号 Revision
TLPA0.5G8G-35-33	Power amplifier 0.5-8GHz, Gain:35dB,Psat:33dBm,+28V DC,Without Heatsink	Rev.1.0
TLPA0.5G8G-35-33-HS	Power amplifier 0.5-8GHz, Gain:35dB,Psat:33dBm,+28V DC,With Heatsink	Rev.1.0

## 典型曲线 Typical Performance Data:

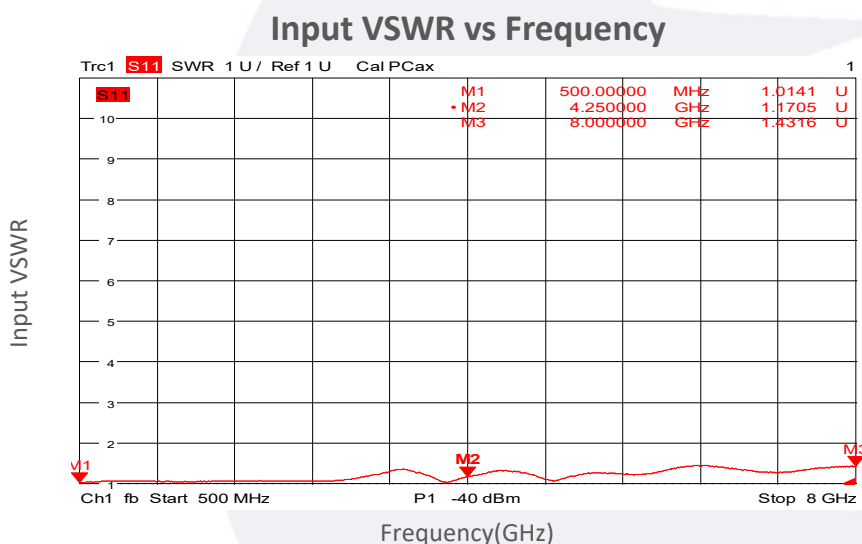




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

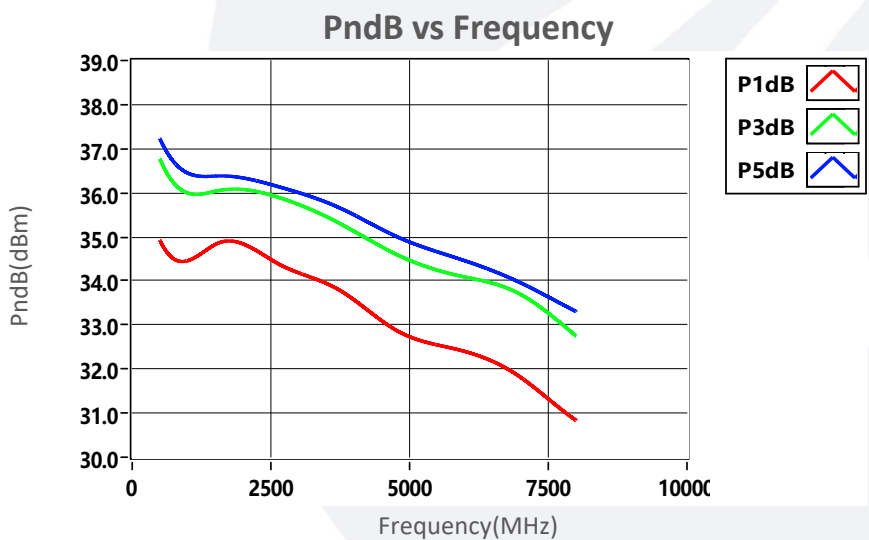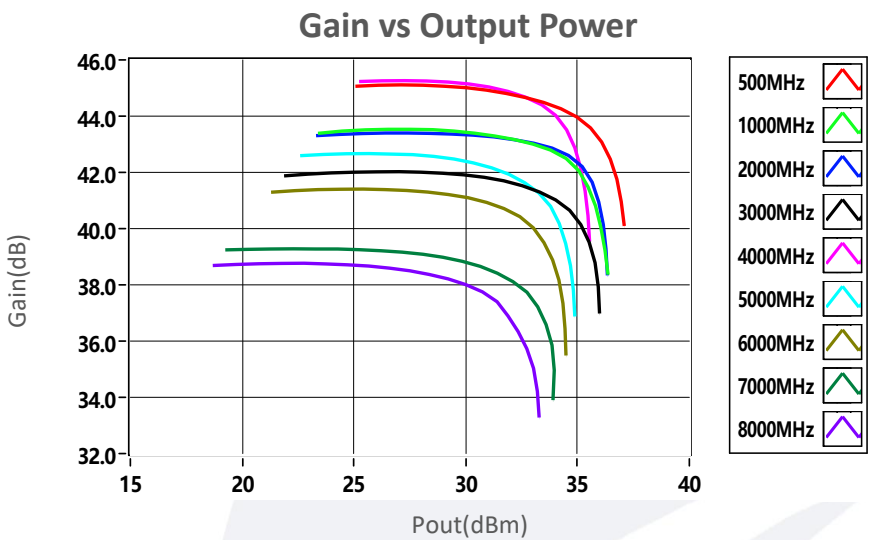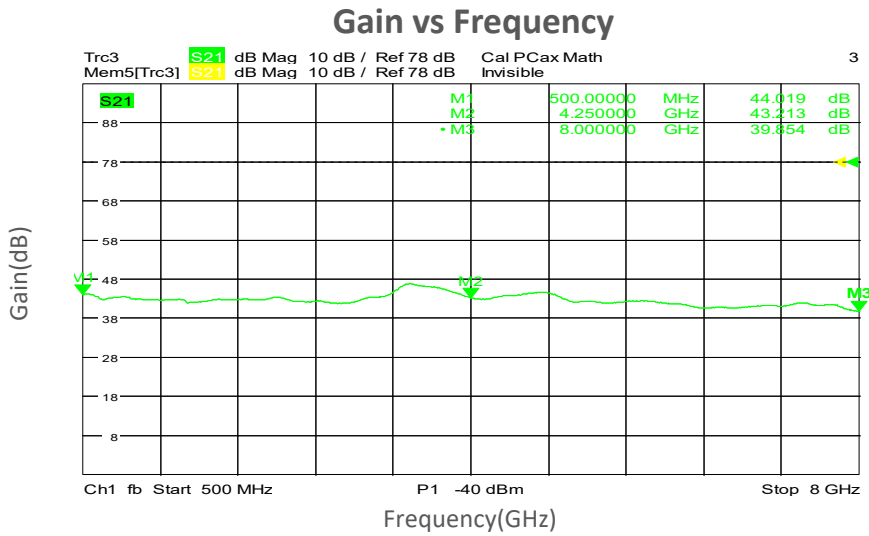

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

**典型曲线 Typical Performance Data:**

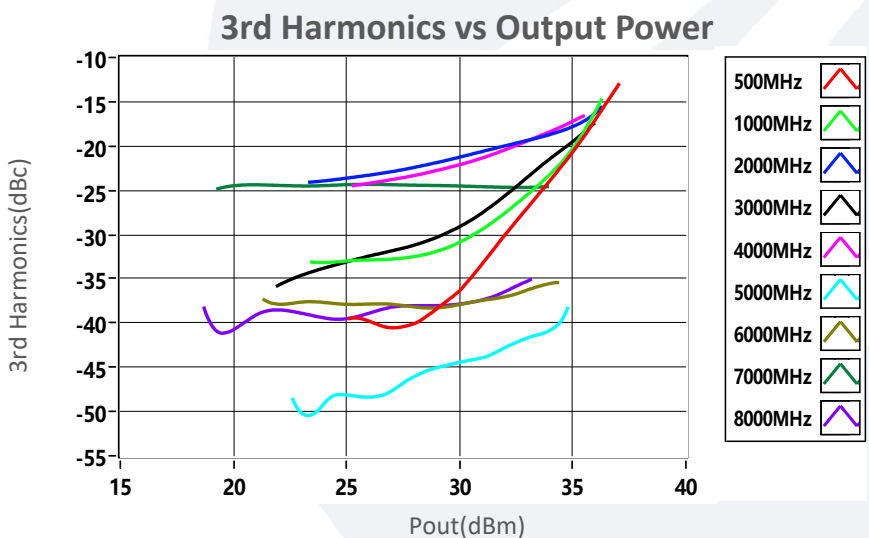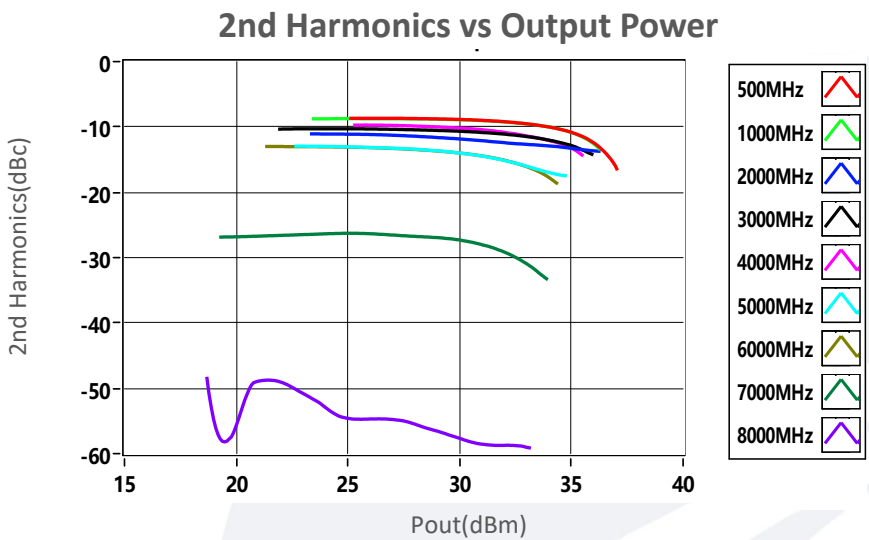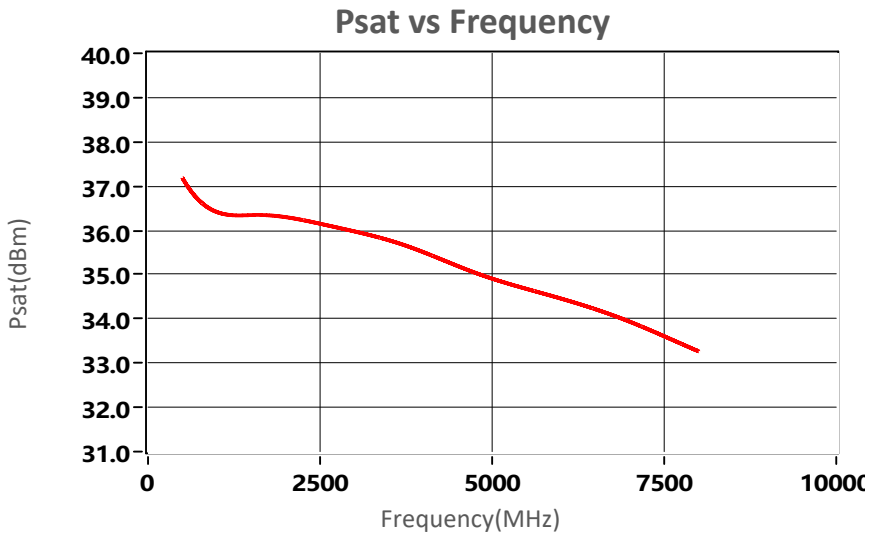

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.