

Power Amplifier

6-40GHz/28dB Gain/22dBm Psat

Model: TLPA6G40G-28-20

TLPA6G40G-28-20 is a power amplifier with a typical small signal gain of 28 dB and a nominal Psat of 22 dBm across the frequency range of 6 to 40 GHz. The DC power requirement for the amplifier is +12 VDC/255 mA. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 6-40GHz
- Gain: 28dB Typ
- Output Power Psat: 22dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	6		40	GHz
Small Signal Gain	26	28		dB
Gain Flatness		±2		dB
Output Psat		22		dBm
Spurious		-60		dBc
Noise Figure		6		dB
Input VSWR		1.7	2.3	:1
Output VSWR		1.7	2.3	:1
DC Voltage		+12		V DC
DC Supply Current		255		mA
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Solder Pin	
Size	44*36*12	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+13 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

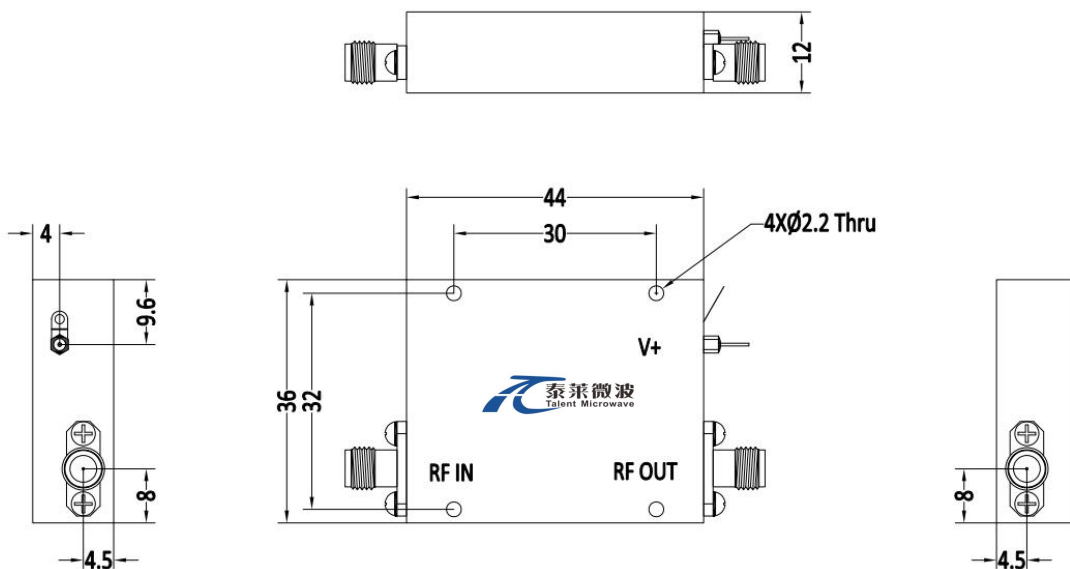

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA6G40G-28-20	Power amplifier 6-40GHz, Gain:28dB,Psat22dBm,+12V DC,Without Heatsink	Rev.1.1
TLPA6G40G-28-20-HS	Power amplifier 6-40GHz, Gain:28dB,Psat22dBm,+12V DC,With Heatsink	Rev.1.1


Typical Performance Data:

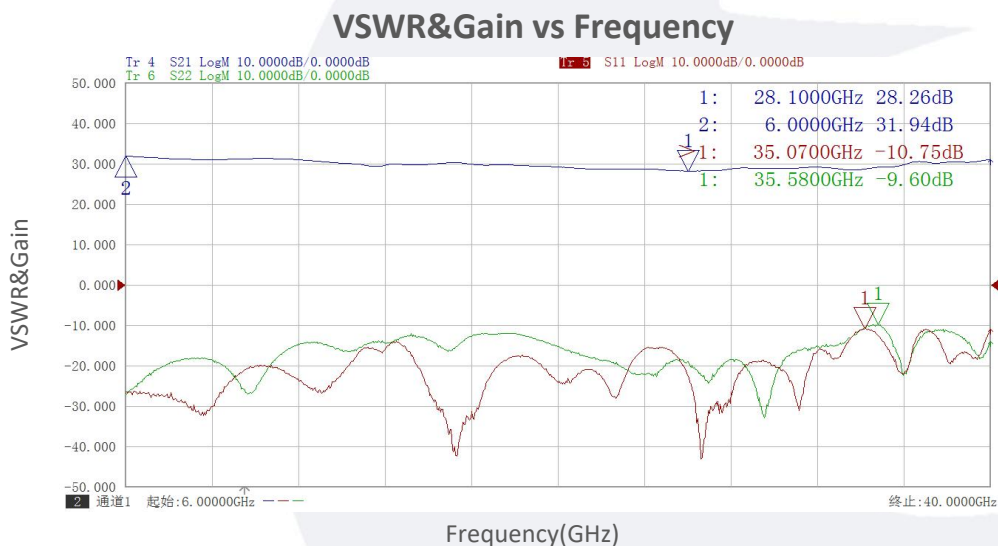

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Gain vs Output Power

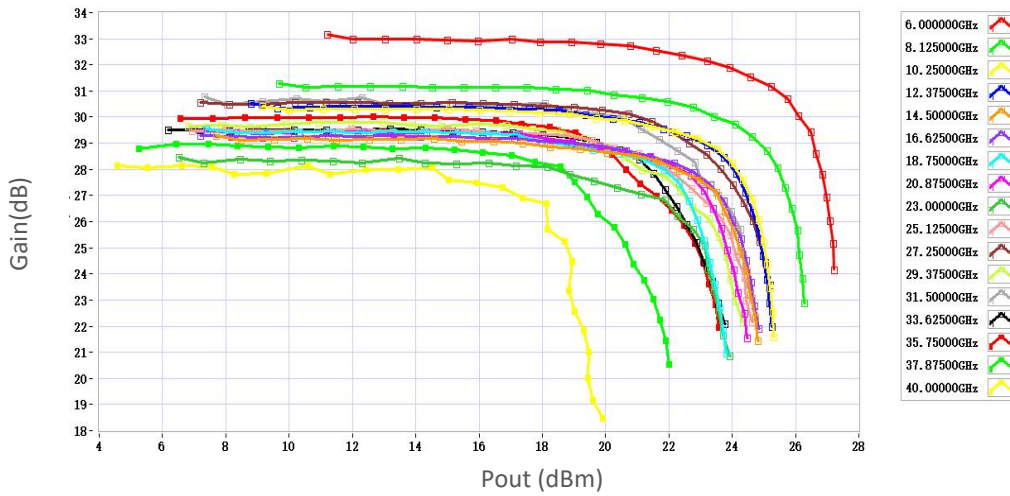

P1dB vs Frequency



P3dB vs Frequency




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Psat vs Frequency



2nd Harmonic vs Output Power

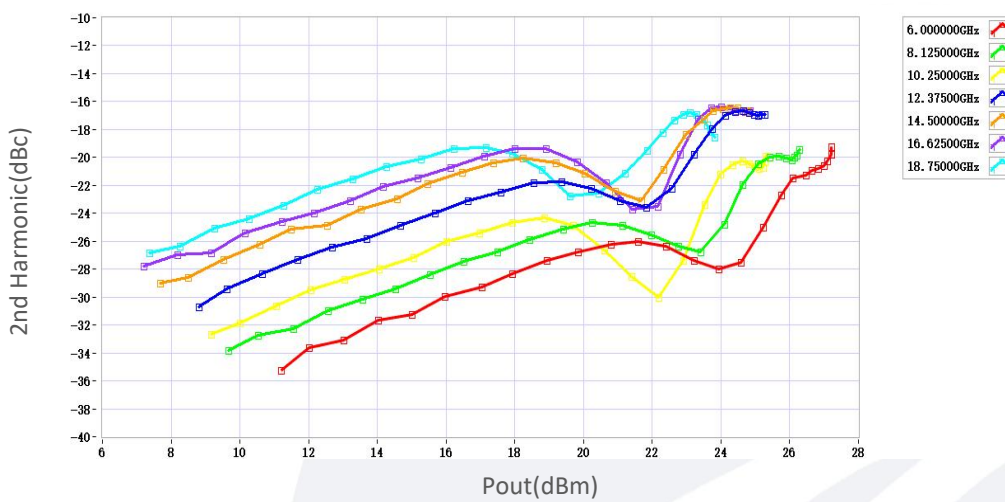

3rd Harmonic vs Output Power

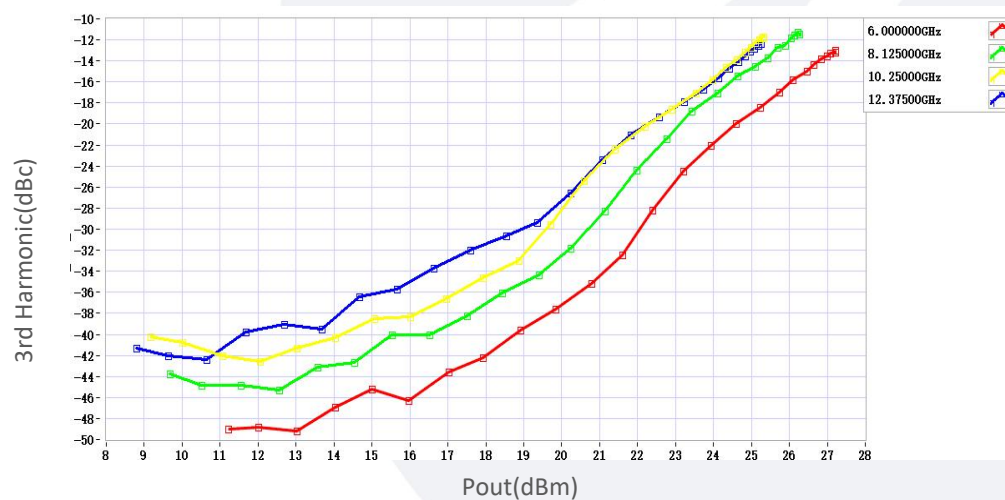

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.