

Power Amplifier

300MHz-6GHz/42dB Gain/32dBm Psat

Model: TLPA300M6G-40-30

TLPA300M6G-40-30 is a power amplifier with a typical small signal gain of 42 dB and a nominal Psat of 32 dBm across the frequency range of 300MHz to 6 GHz. The DC power requirement for the amplifier is +12 VDC/700 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 300MHz-6GHz
- Gain: 42dB Typ
- Output Power Psat: 32dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	300MHz		6GHz	
小信号增益 Small Signal Gain	40	42		dB
增益平坦度 Gain Flatness		±0.5	±1	dB
线性输出功率 Output P1dB	30	31		dBm
饱和输出功率 Output Psat		32		dBm
输入驻波 Input VSWR		1.8		dBc
谐波 Harmonics@Pout=30dBm		-15		:1
直流电压 DC Voltage		+12	+15	V DC
直流电流 DC Supply Current		700	1000	mA
阻抗 Impedance		50		Ohms

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:




标准型号 Base Number	描述 Description	版本号 Revision
TLPA300M6G-40-30	Power amplifier 300MHz-6GHz, Gain:42dB,Psat:32dBm,+12V DC,Without Heatsink.	Rev.1.1
TLPA300M6G-40-30-HS	Power amplifier 300MHz-6GHz, Gain:42dB,Psat:32dBm,+12V DC,With Heatsink.	Rev.1.1

典型曲线 Typical Performance Data:

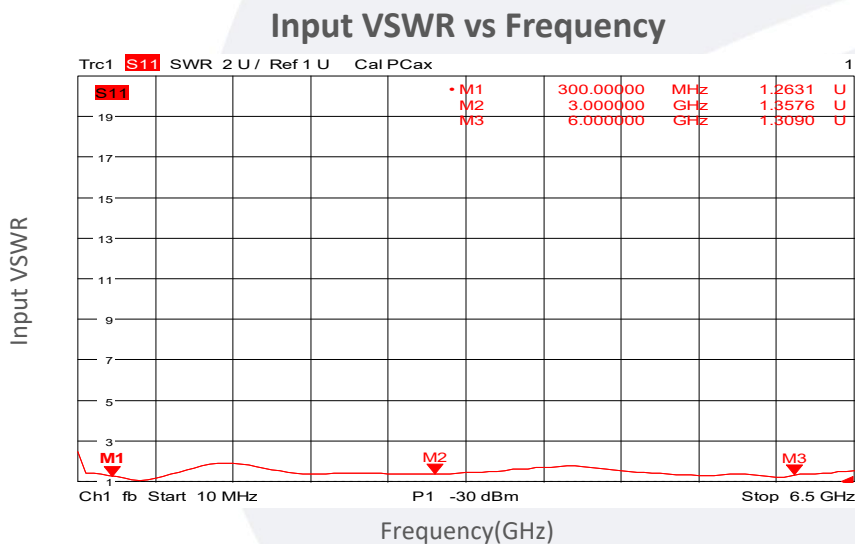

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.


典型曲线 Typical Performance Data:

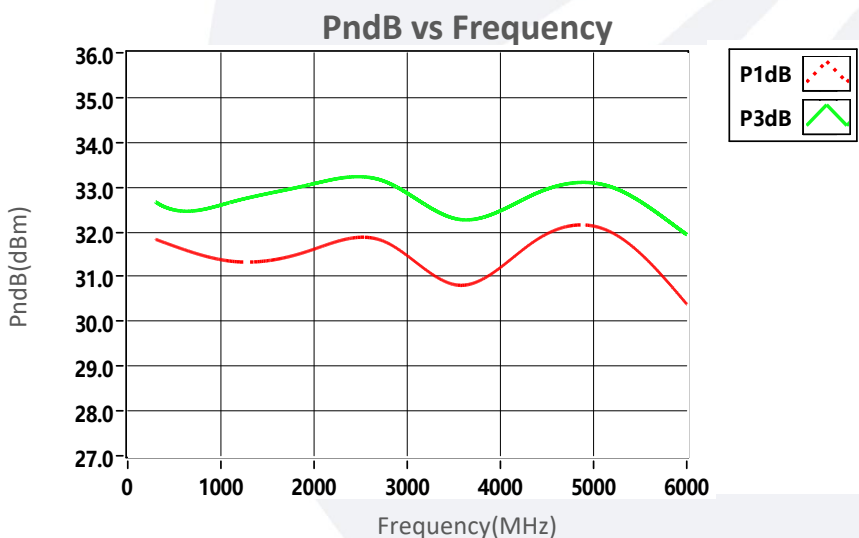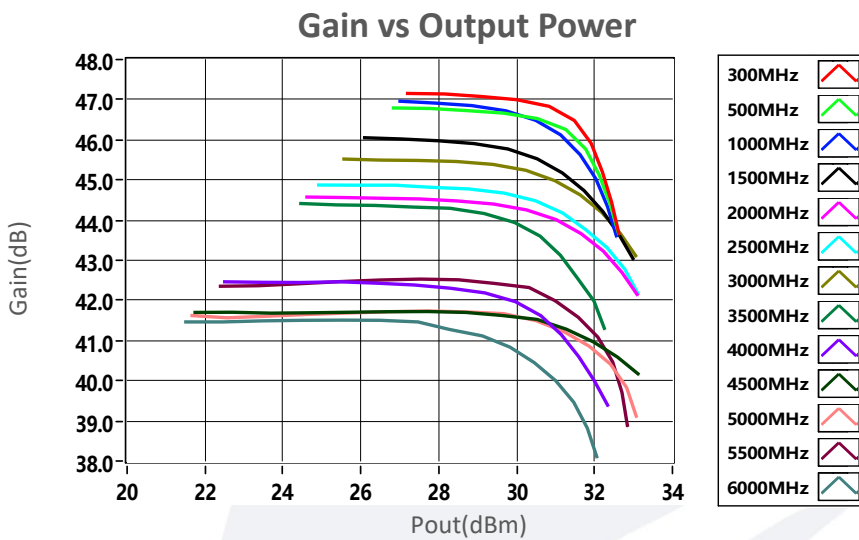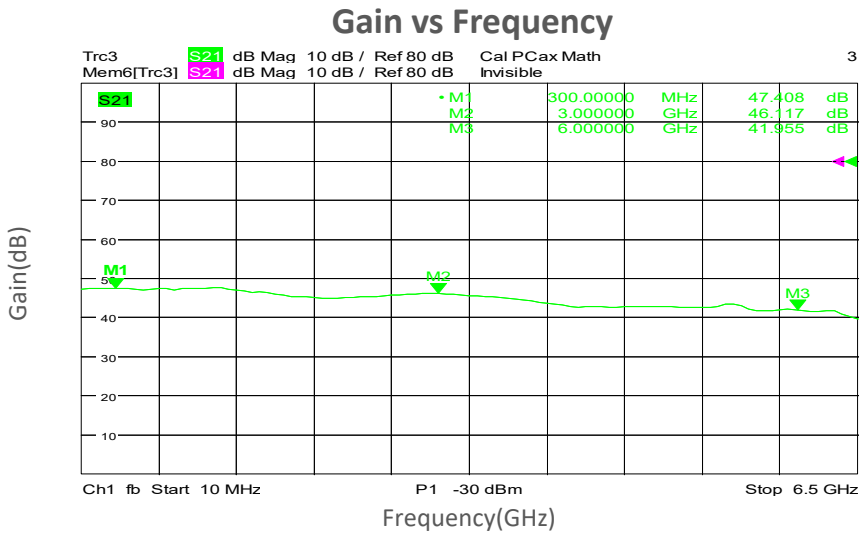


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

2nd Harmonics vs Output Power

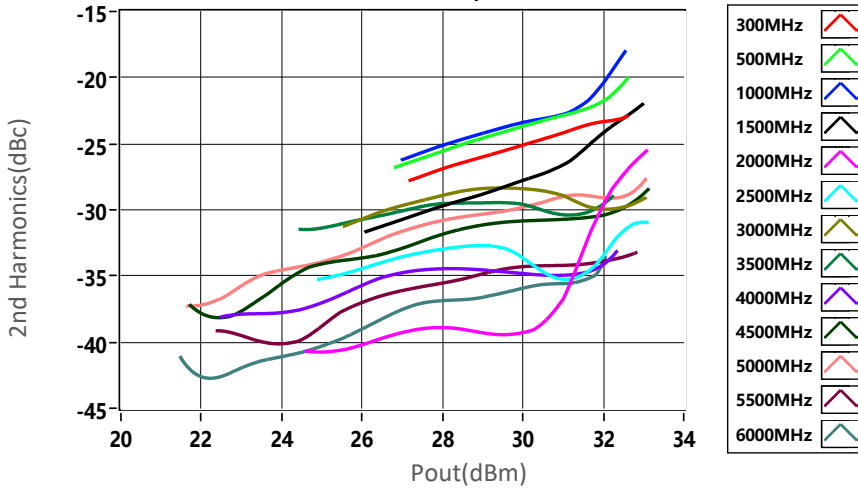

3rd Harmonics vs Output Power

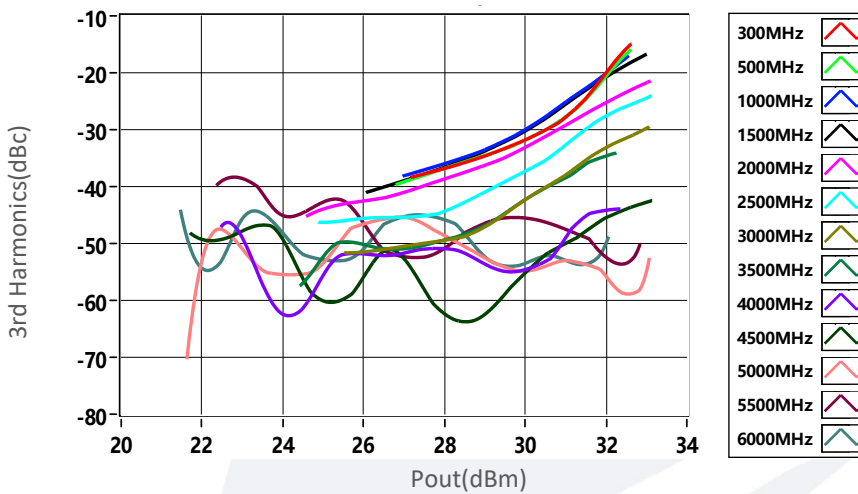

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.