

Power Amplifier

18-40GHz/35dB Gain/33dBm Psat

Model: TLPA18G40G-35-33

TLPA18G40G-35-33 is a power amplifier with a minimum gain of 35 dB and a nominal Psat of 33 dBm across the frequency range of 18 to 40 GHz. The DC power requirement for the amplifier is +24 VDC. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 18-40GHz
- Gain: 35dB Min
- Output Power Psat: 33dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	18		40	GHz
Gain	35			dB
Output P1dB Flatness			±2	dB
Output P1dB	30			dBm
OutputPsat		33		dBm
Input VSWR		2		:1
Spurious@Pout=30dBm			-50	dBc
DC Voltage		+24		V DC
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Solder Pin	
Size	150*90*20	mm
Weight	500	g


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	1-5:+24V 6-9:GND
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

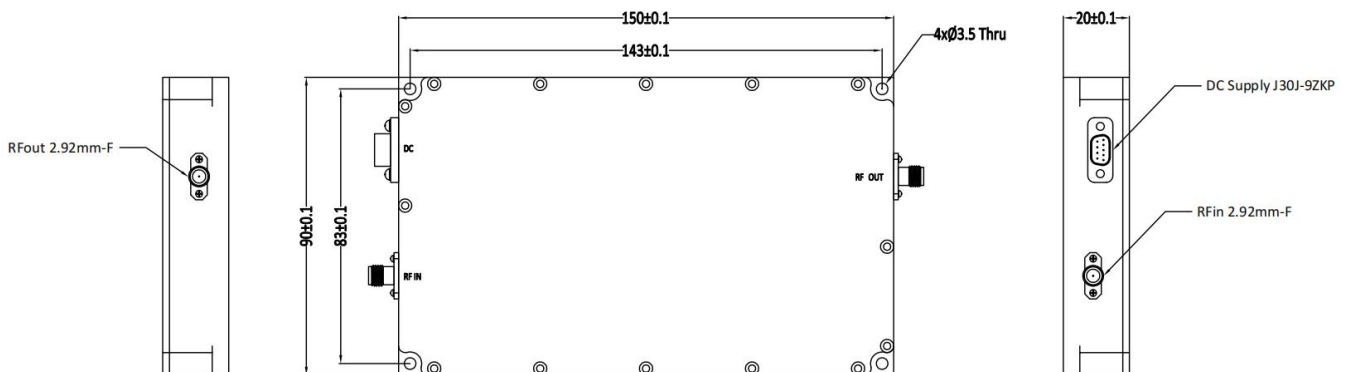

***Heat Sink Required During Operation

J30J-9ZKP引脚定义	
Pin	Function
1-5	+24V
6-9	GND



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity	100%RH at 35°C, 95%RH at 40°C			%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA18G40G-35-33	Power amplifier 18-40GHz, Gain:35dB,Psat:33dBm,+24V DC,Without Heatsink	Rev.1.1
TLPA18G40G-35-33-HS	Power amplifier 18-40GHz, Gain:35dB,Psat:33dBm,+24V DC,With Heatsink	Rev.1.1