

## Power Amplifier

26.5-40GHz/32dB Gain/34dBm Psat

Model: TLPA26.5G40G-32-34

TLPA26.5G40G-32-34 is a power amplifier with a typical gain of 32 dB and a nominal Psat of 34 dBm across the frequency range of 26.5 to 40 GHz. The DC power requirement for the amplifier is +12 VDC/4 A. The input and output port configuration offers coax adapter structure with 2.92mm female.

### Features:

- Frequency range: 26.5-40GHz
- Gain: 32dB Typ
- Output Power Psat: 34dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	26.5		40	GHz
Gain	30	32		dB
Gain Flatness		±2.5		dB
Output P1dB		33		dBm
Output Psat		34		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage		+12		V DC
DC Supply Current		4		A
Impedance		50		Ohms

### Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Solder Pin	
Size	56*55*12	mm


### Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+12 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



### Outline Drawing:

Unit:mm

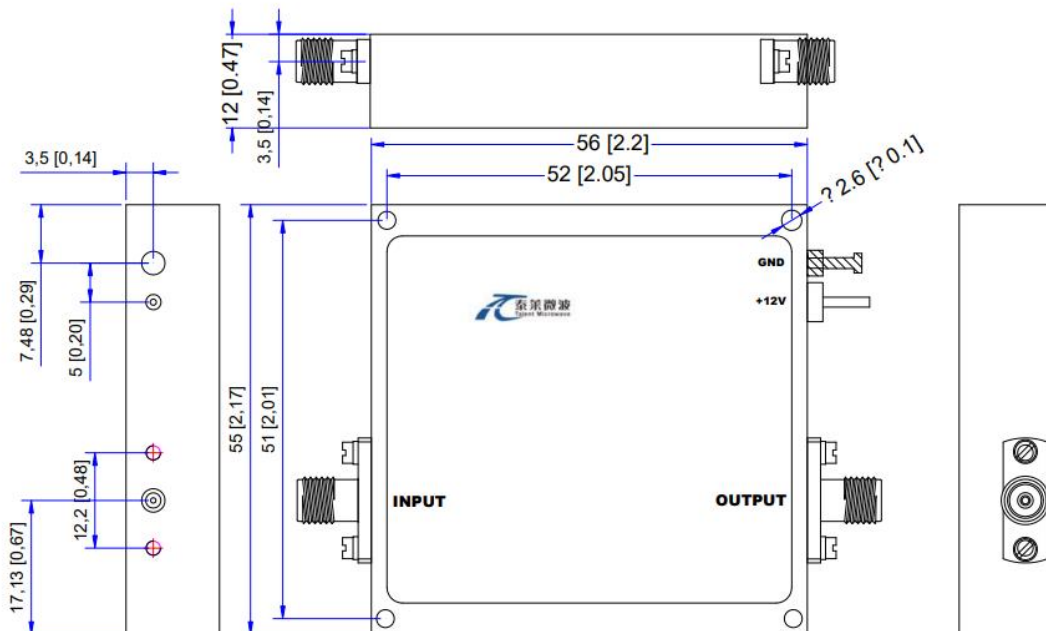

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

### Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


\*Note: For a wider temperature range, please consult the manufacturer.

### Ordering Information:

Base Number	Description	Revision
TLPA26.5G40G-32-34	Power amplifier 26.5-40GHz, Gain:32dB,Psat:34dBm,+12V DC,Without Heatsink	Rev.1.1
TLPA26.5G40G-32-34-HS	Power amplifier 26.5-40GHz, Gain:32dB,Psat:34dBm,+12V DC,With Heatsink	Rev.1.1

### Typical Performance Data:

VSWR&Gain vs Frequency

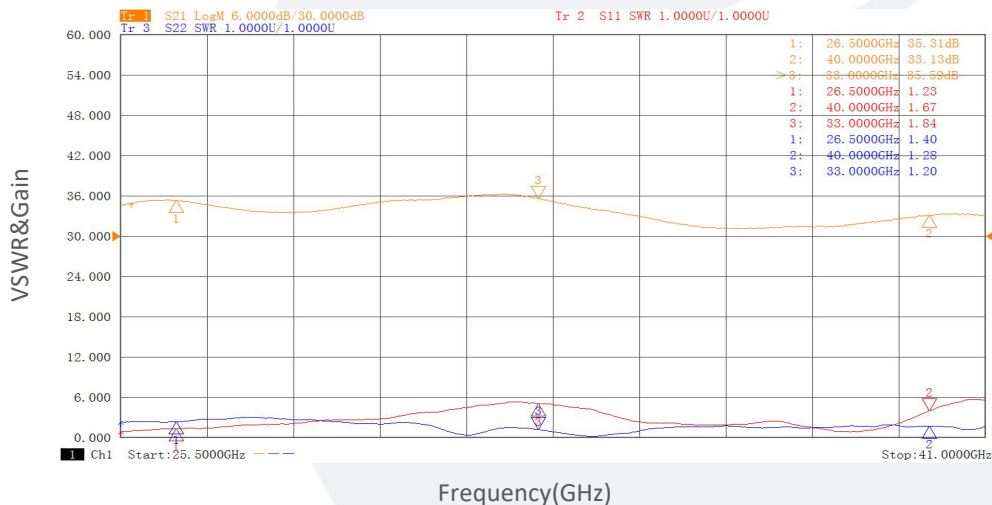

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.