

Power Amplifier

2200-2400MHz/30dB Gain/40dBm Psat

Model: TLPA2200M2400M-30-40

TLPA2200M2400M-30-40 is a power amplifier with a minimum small signal gain of 30 dB and a minimum Psat of 40 dBm across the frequency range of 2200 to 2400 GHz. The DC power requirement for the amplifier is +28 VDC/0.7 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 2200-2400MHz
- Gain: 30dB Min
- Output Power Psat: 40dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	2200		2400	MHz
小信号增益 Small Signal Gain	30	33		dB
增益平坦度 Gain Flatness		±0.5	±1	dB
饱和输出功率 Output Psat	40	43		dBm
杂散 Spurious		-65	-60	dBc
输入驻波 Input VSWR		1.3	1.5	:1
输出驻波 Output VSWR			2.0	:1
直流电压 DC Voltage	+18	+28	+36	V DC
直流电流 DC Supply Current		0.7	3	A
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	150*140*30	mm
重量 Weight	1.3	Kg


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+36 V
输入功率 RF Input Power	+33 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



外形图 Outline Drawing:

Unit:mm

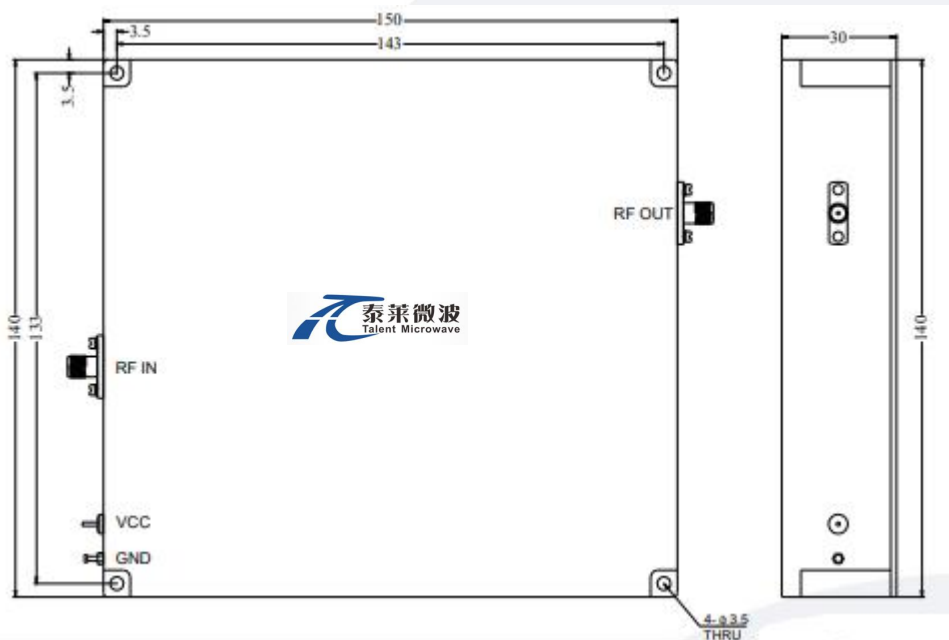

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA2200M2400M-30-40	Power amplifier 2200-2400MHz, Gain:30dB,Psat:40dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA2200M2400M-30-40-HS	Power amplifier 2200-2400MHz, Gain:30dB,Psat:40dBm,+28V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

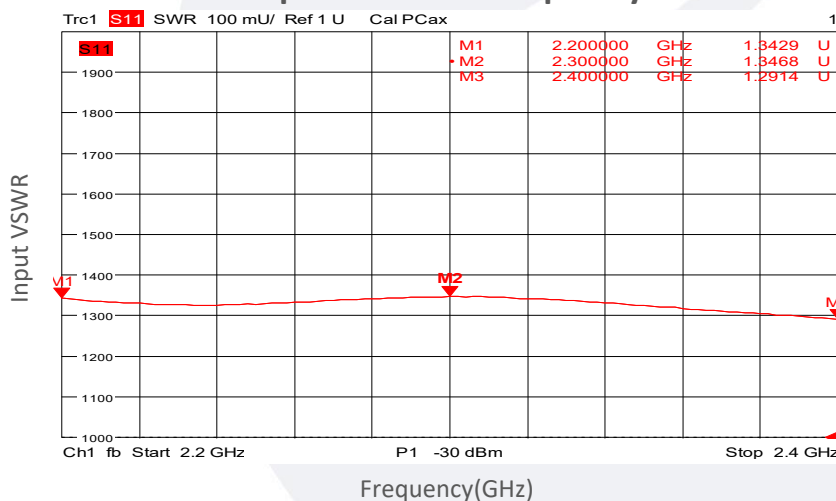


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

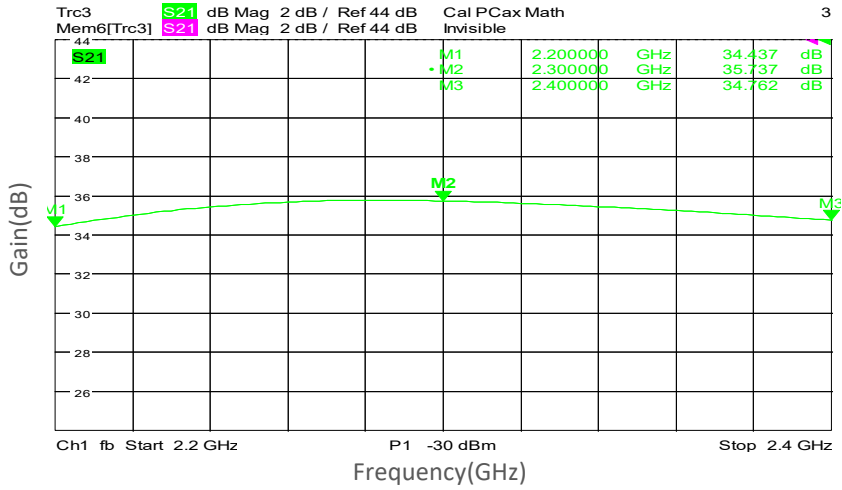

Gain vs Output Power

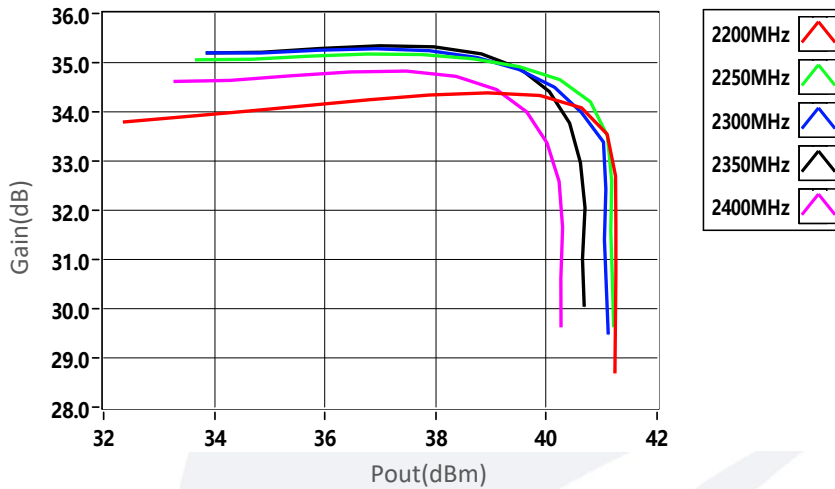


PndB vs Frequency

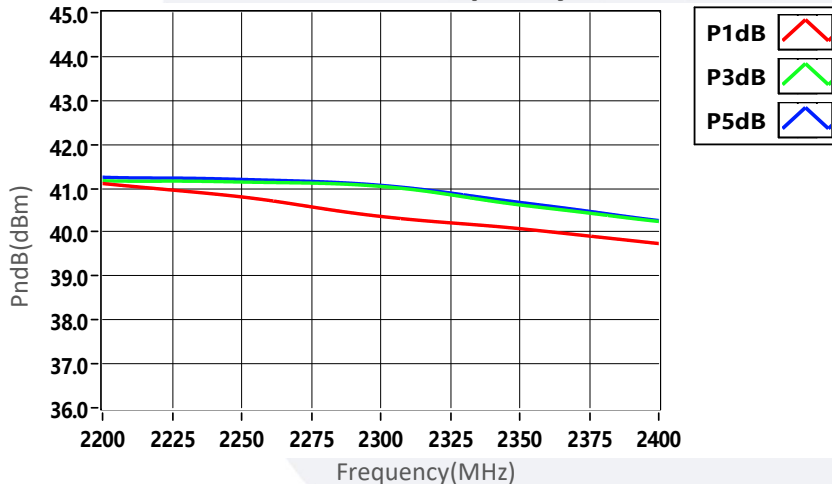


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

2nd Harmonics vs Output Power

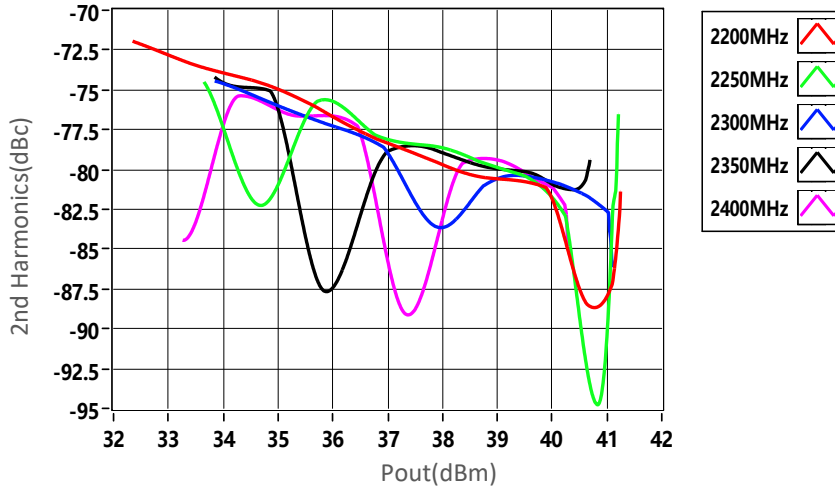

3rd Harmonics vs Output Power

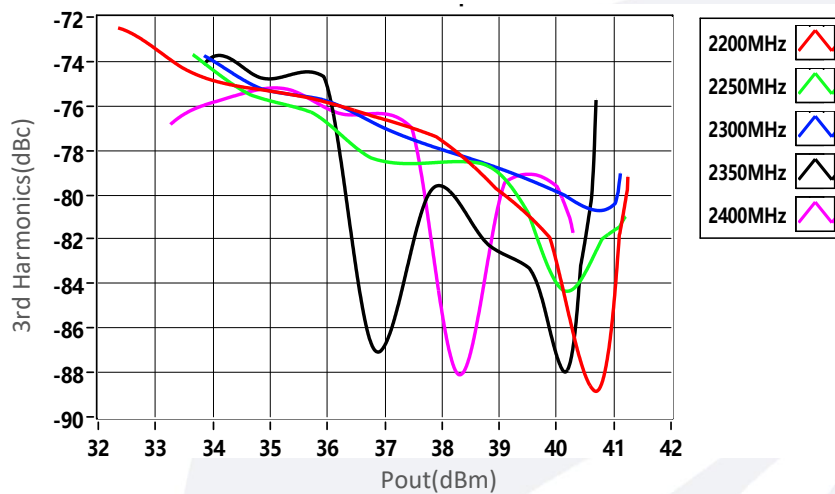

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.