

Power Amplifier

0.3-18GHz/37dB Gain/30.5dBm P1dB

Model: TLPA0.3G18G-37-30.5

TLPA0.3G18G-37-30.5 is a power amplifier with a typical power gain of 37dB and a nominal P1dB of 30.5 dBm across the frequency range of 0.3 to 18 GHz. The DC power requirement for the amplifier is +15 VDC/700 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 0.3-18GHz
- Gain: 37dB Typ
- Output Power Psat: 30.5dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.3		18	GHz
小信号增益 Small Signal Gain	34	37		dB
增益平坦度 Gain Flatness		±2		dB
线性输出功率 Output P1dB	29.5	30.5		dBm
输出IP3 OIP3		42		dBm
噪声系数 Noise Figure		3.5	5	dB
杂散 Spurious			-60	dBc
反向隔离度 Reverse Isolation		60		dB
输入驻波 Input VSWR		1.8	2.2	:1
输出驻波 Output VSWR		1.8	2.2	:1
直流电压 DC Voltage		15		V DC
直流电流 DC Supply Current		700		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入输出接口 Input & Output Connector	SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	48.3*38.1*12.7	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+18 V
输入功率 RF Input Power	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



外形图 Outline Drawing: Unit:mm

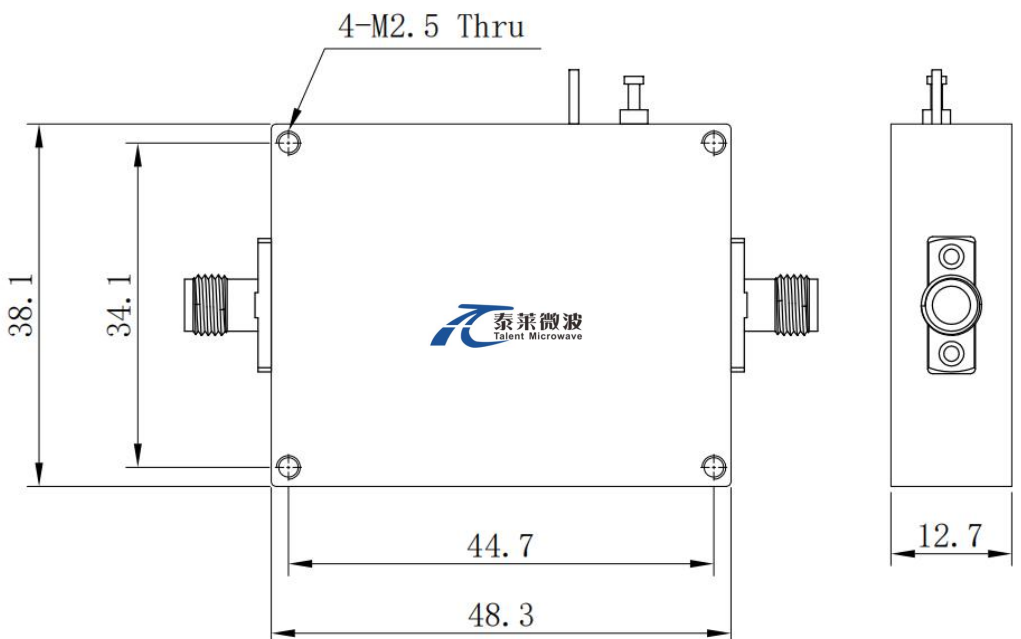

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA0.3G18G-37-30.5	Power amplifier 0.3-18GHz, Gain:37dB,P1dB:30.5dBm,+15V DC,Without Heatsink	Rev.1.0
TLPA0.3G18G-37-30.5-HS	Power amplifier 0.3-18GHz, Gain:37dB,P1dB:30.5dBm,+15V DC,Without Heatsink	Rev.1.0