

Coaxial DC Block

30KHz-110GHz/1.0 mm/25V

Model:TDCB1M1M-3

The TDCB1M1M-3 is a 1.0mm coaxial DC block that prevents the flow of DC current in the frequency range of 30KHz to 110GHz. The DC block has a typical insertion loss of 2.5dB, a typical return loss of -12dB. It is manufactured with 1.0mm male connectors for convenient circuit insertion. The breakdown voltage is +25 Volts..

Features:

- Operating Frequency 30KHz to 110GHz
- High Return Loss
- Low Cost

Applications:

- laboratory test
- Instrumentations
- System Integration

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	30KHz-110GHz			
Return Loss		-12		dB
Insertion Loss		2.5		dB
Breakdown Voltage		25		V
Group Delay		80		ps
Impedance		50		Ohms

Environmental And Physical Characteristics:

Description	Parameter	Units
Body Material	Copper	
Finish	Gold plated	
Inner Conductor	BeCu,Golden	
Connectors	1.0mm Male/1.0mm Male	
Length	23.9*9.5*9.5	mm
Working Temperature	-40° to +70° C, operating	

Outline Drawing:

Unit:mm

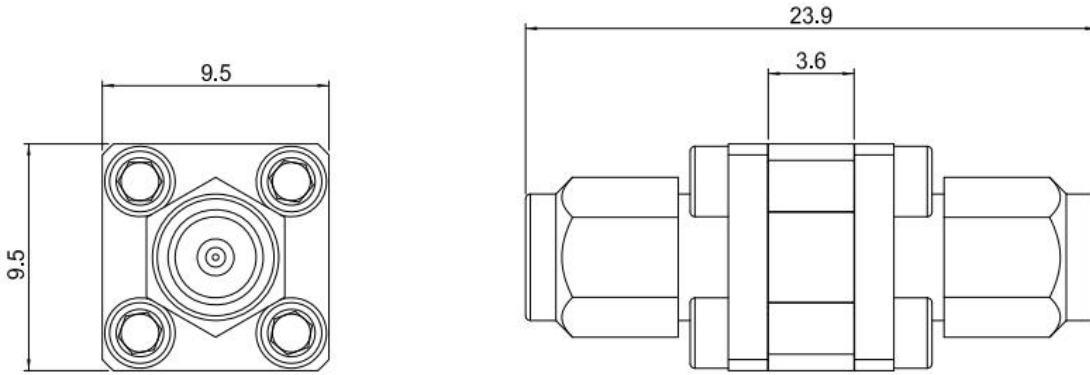

Ordering Information:

Base Number	Description
TDCB1M1M-3	30KHz-110GHz,25V,1.0mm Coaxial DC Block