

Power Amplifier

1-6GHz/50dB Gain/47dBm Psat

Model: TLPA1G6G-50-47

TLPA1G6G-50-47 is a power amplifier with a typical small signal gain of 50 dB and a minimum Psat of 47 dBm across the frequency range of 1 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/10 A. The input port configuration offers coax adapter structure with SMA female and output port configuration offers coax adapter structure with N Female.

Features:

- Frequency range: 1-6GHz
- Gain: 50dB Typ
- Output Power Psat: 47dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	1		6	GHz
小信号增益 Small Signal Gain	47	50		dB
增益平坦度 Gain Flatness		±3	±4	dB
线性输出功率 Output P1dB	43	44		dBm
饱和输出功率 Output Psat	47	47.5		dBm
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage	+26	+28	+30	V DC
静态电流 Static Current		3		A
饱和电流 Saturation Current		10	12	A
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/N Female	
直流供电接口 DC Power Supply Connector	D-SUB-9	
尺寸 Size	200*130*24(Without heatsink) 282.2*140*86(With heatsink)	mm
重量 Weight	1000	g


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+30 V
输入功率 RF Input Power	5dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



外形图 Outline Drawing:

Unit:mm

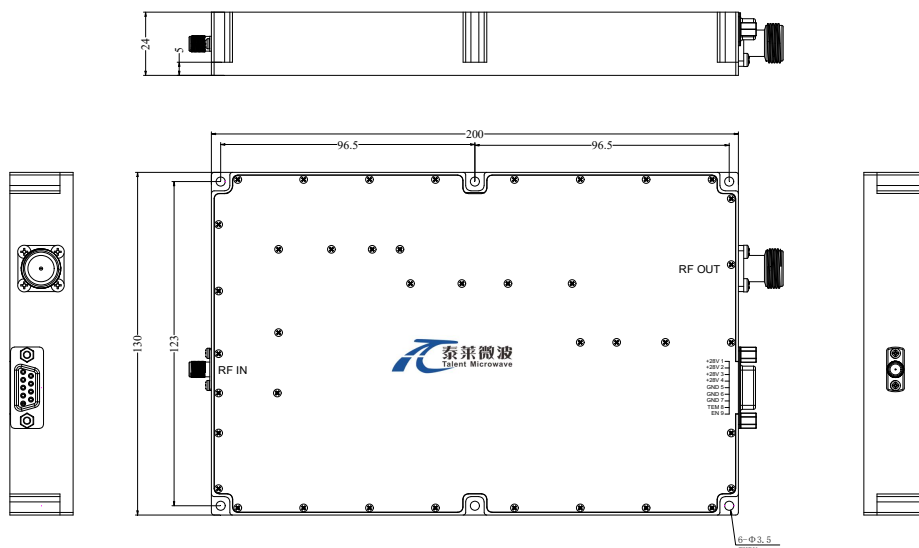

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

直流供电接口 DC Supply Connector(DSUB-9 Female):

引脚 Pin	名称 Name	功能 Function
3	Vcc	Power supply positive,+26.0-30.0VDC
4	Vcc	Power supply positive,+26.0-30.0VDC
5	GND	Ground
6	GND	Ground
7	GND	Ground
8	Over TEM	When the temperature of the case exceeds 85 °C, the power amplifier will turn off and this pin will be pulled high. If the temperature of case drops to 70 °C, the power amplifier will return to normal operation, and this pin will be pulled low.
9	EN	Amplifier Enable: TTL High (5V) (Internally Pulled-High) Amplifier Disable: Short to ground

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+50	°C
存储温度 Non-operating Temperature*	-30		+60	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLPA1G6G-50-47	Power amplifier 1-6GHz, Gain:50dB,Psat:47dBm,+28V DC,Without Heatsink	Rev.2.0
TLPA1G6G-50-47-HS	Power amplifier 1-6GHz, Gain:50dB,Psat:47dBm,+28V DC,With Heatsink	Rev.2.0

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

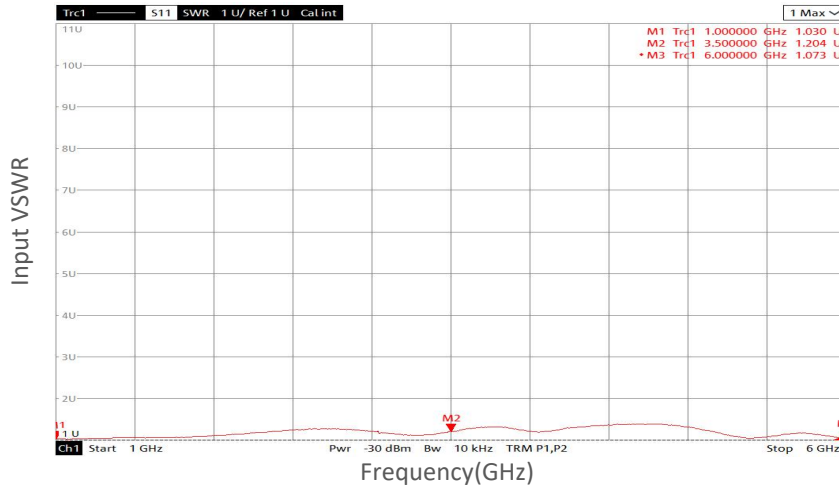

Small Signal Gain vs Frequency

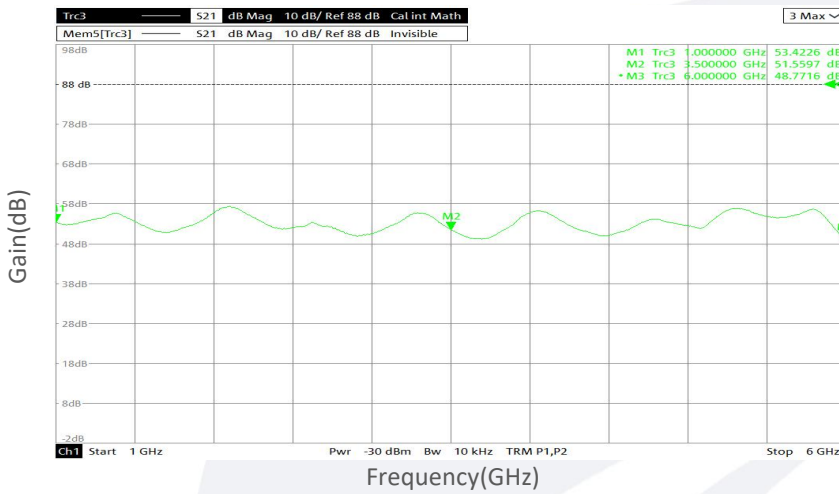


Gain vs Output Power

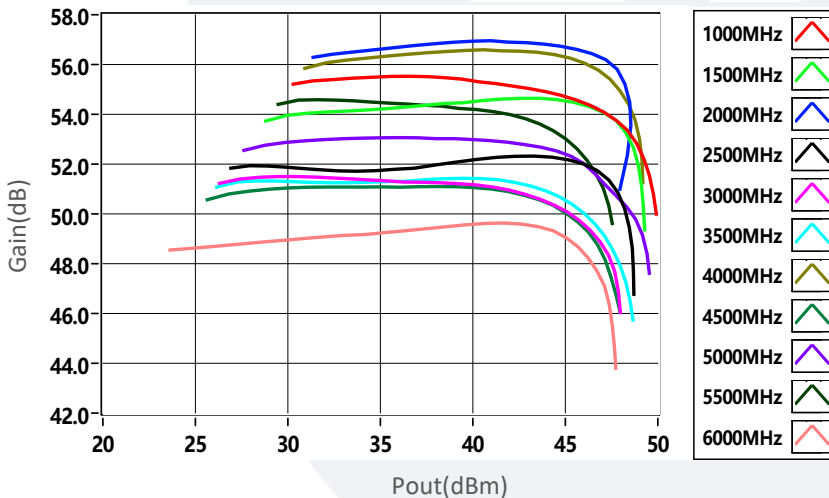


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


PndB vs Frequency

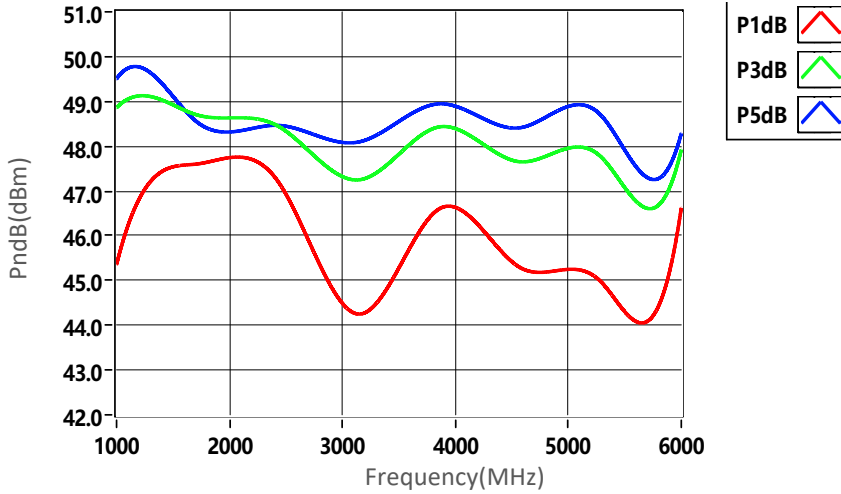

Psat vs Frequency

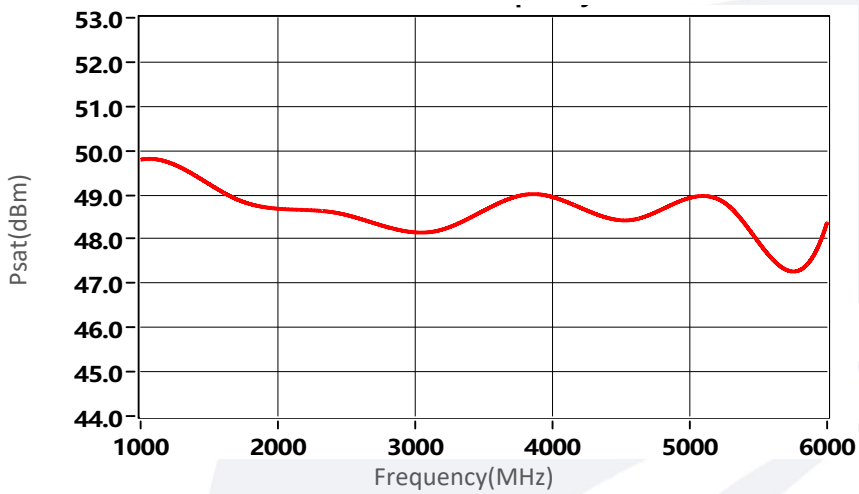


2nd Harmonics vs Output Power

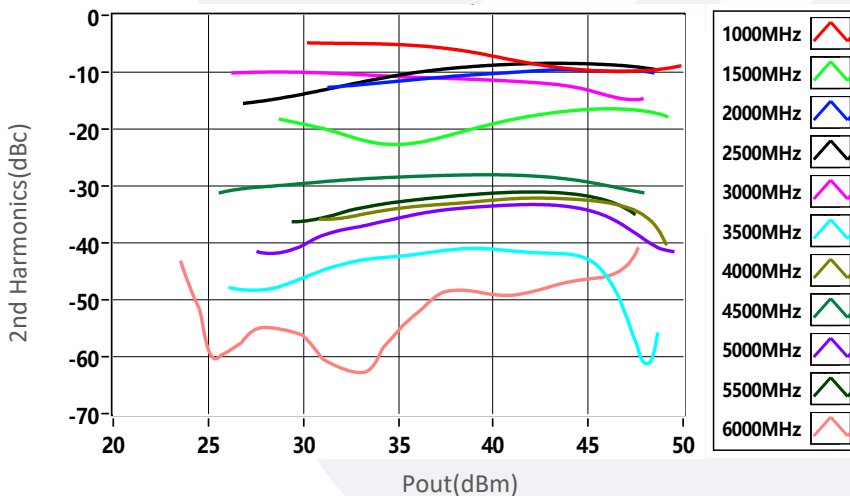


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

3rd Harmonics vs Output Power

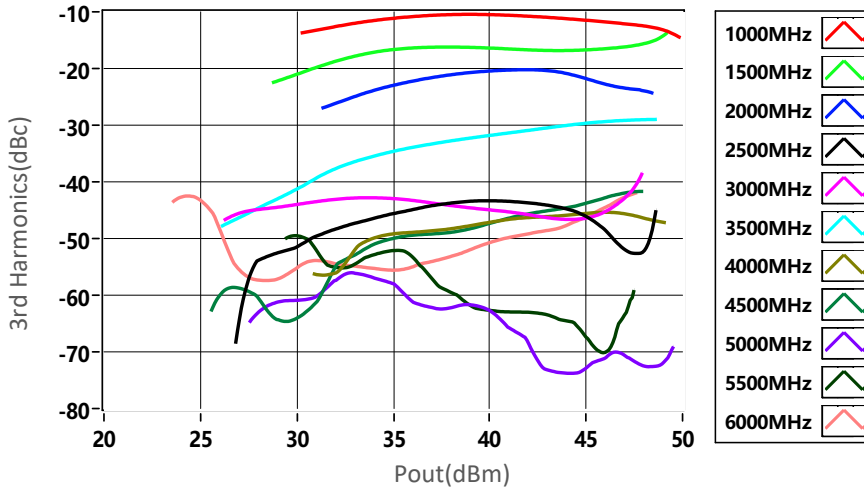

4th Harmonics vs Output Power

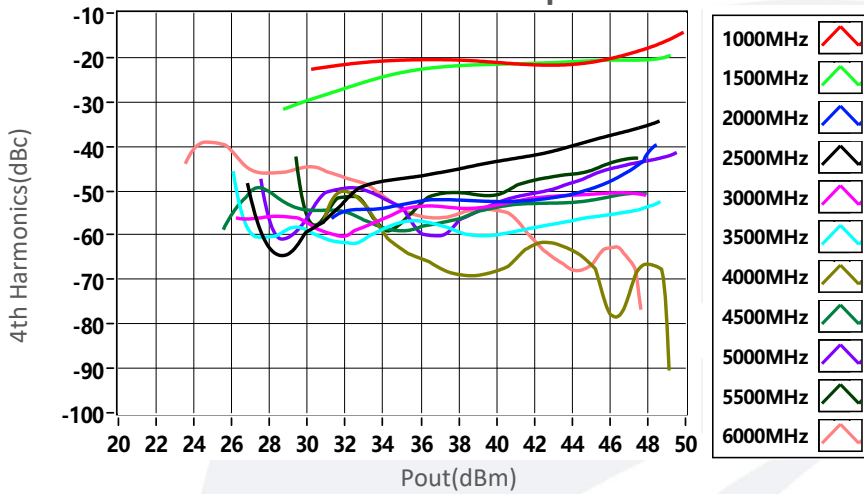

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.