

Power Amplifier

WR-10/90-100GHz/42dB Gain/22dBm Psat

Model: TMPA-090100-4020-10

TMPA-090100-4020-10 is a power amplifier with a typical small signal gain of 42 dB and a nominal Psat of 22 dBm across the frequency range of 90 to 100 GHz. The DC power requirement for the amplifier is +5 VDC/950 mA. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-387/U-M anticocking flanges.

Features:

- Frequency range: 90-100GHz
- Gain: 42dB Typ
- Output Power Psat: 22dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	90		100	GHz
Small Signal Gain	40	42		dB
Output Psat	20	22		dBm
Input VSWR		2.5		:1
Output VSWR		2.5		:1
DC Voltage		5		V DC
DC Supply Current		950		mA

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-10/UG-387/U	
DC Bias	Solder Pin	
Size	54*35*20(Without Heatsink) 54*68*60(With Heatsink)	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

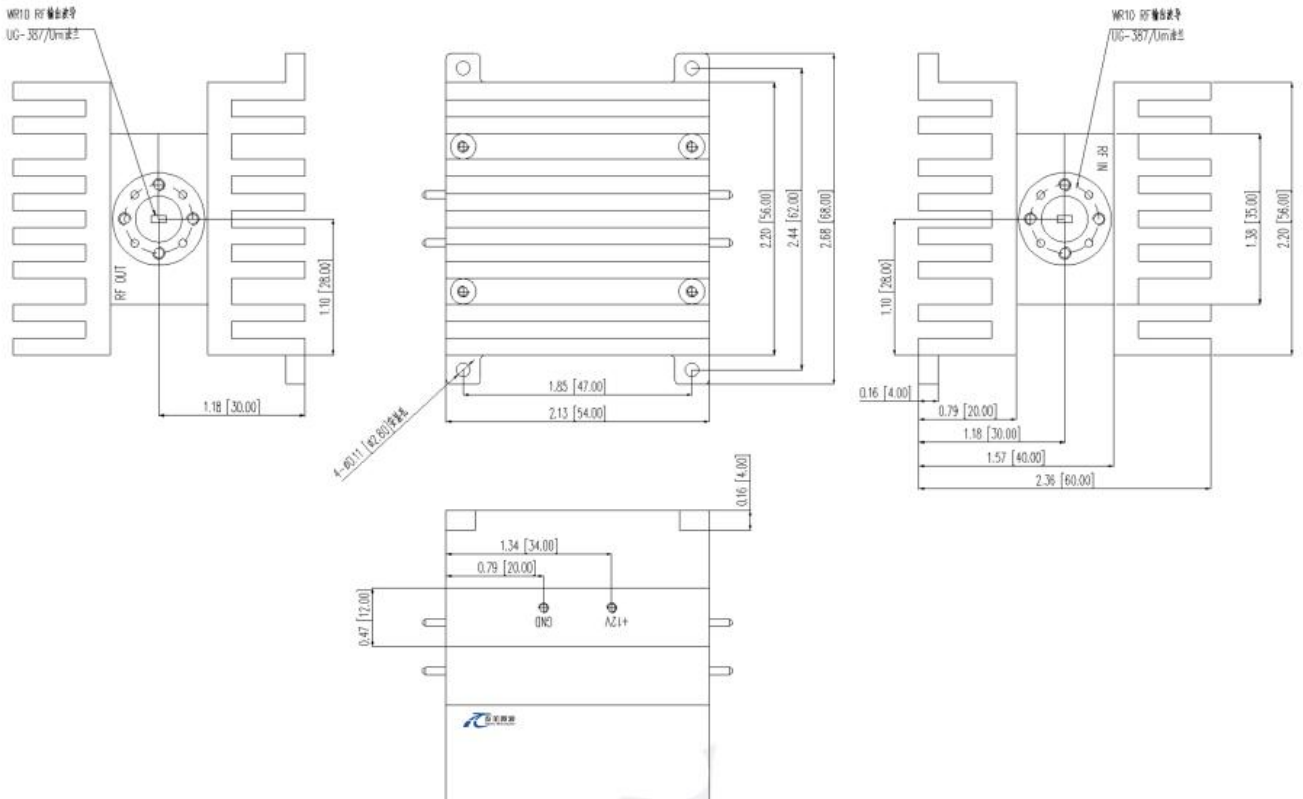

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-090100-4020-10	Power Amplifier, 90-100GHz, Gain: 42dB Type, Psat: 22dBm Type, +5V DC, WR-10, With heasink	Rev.1.1