

Low Noise Amplifier

22-26GHz/2.5dB NF/40dB Gain/12dBm P1dB

Model: TLLA22G26G-40-25

TLLA22G26G-40-25 is a low noise amplifier with a minimum small signal gain of 40 dB and a nominal noise figure of 2.5 dB across the frequency range of 22 to 26 GHz. The DC power requirement for the amplifier is +8 V DC/70 mA. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 22-26GHz
- Gain: 40dB Min
- Noise Figure: 2.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	22		26	GHz
小信号增益 Small Signal Gain	40			dB
增益平坦度 Gain Flatness			±0.5	dB
噪声系数 Noise Figure		2.5	2.8	dB
线性输出功率 Output P1dB	12			dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		8		V DC
直流电流 DC Supply Current		70		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/2.92mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	25*35*13	mm


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+10 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

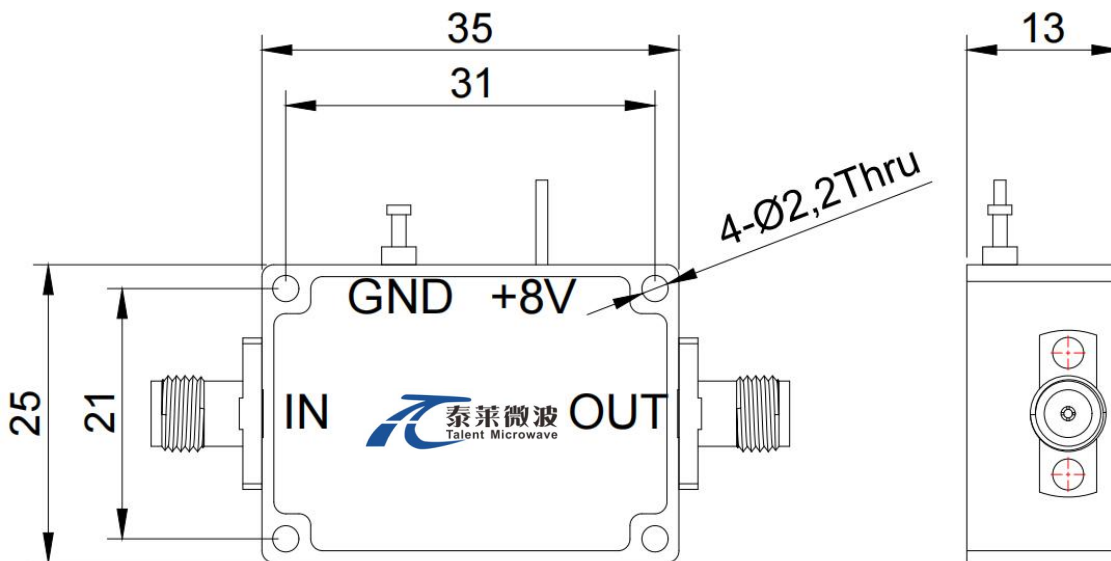

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLLA22G26G-40-25	Low Noise Amplifier, 22-26GHz, Noise Figure:2.5dB, Gain:40dB,P1dB:12dBm,+8V DC,Without Heatsink	Rev.1.1
TLLA22G26G-40-25-HS	Low Noise Amplifier, 22-26GHz, Noise Figure:2.5dB, Gain:40dB,P1dB:12dBm,+8V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

Gain&VSWR vs Frequency




Noise Figure vs Frequency

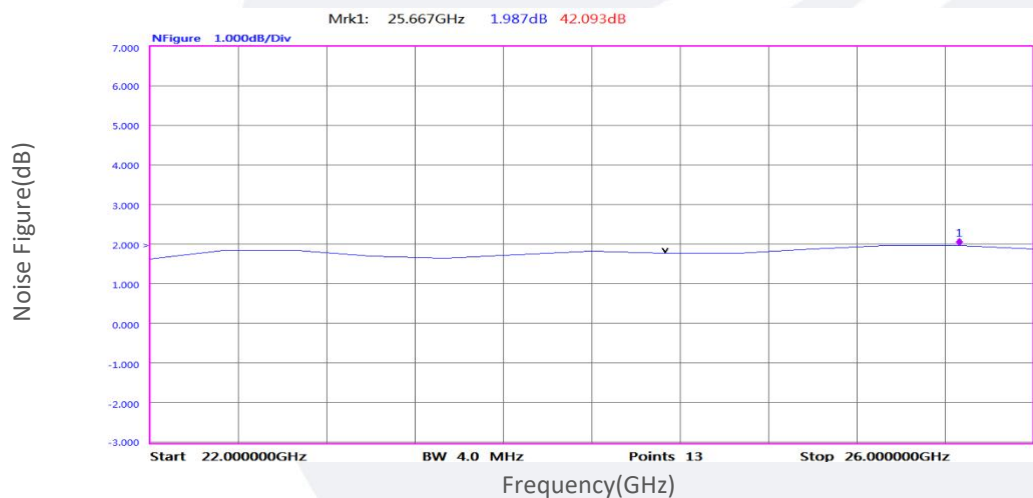


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Gain vs Output Power

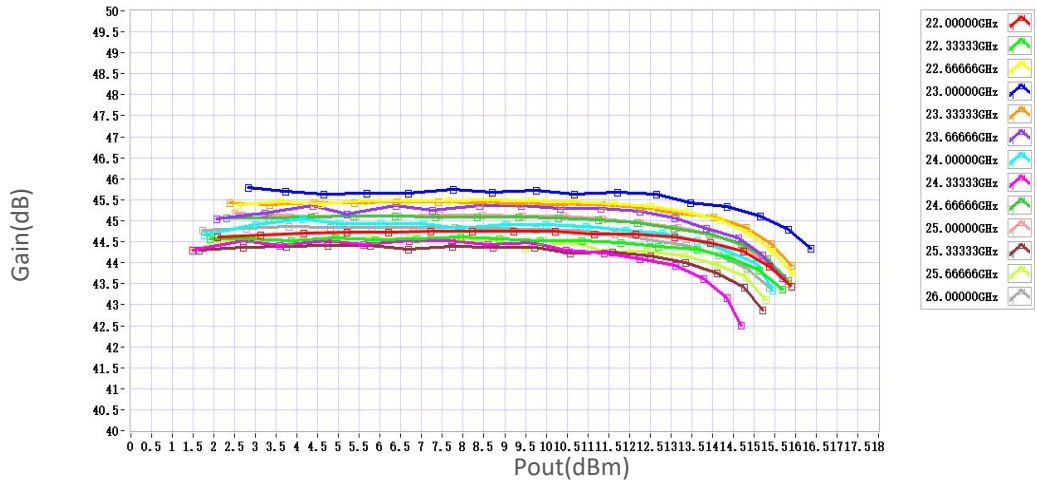

P1dB vs Frequency

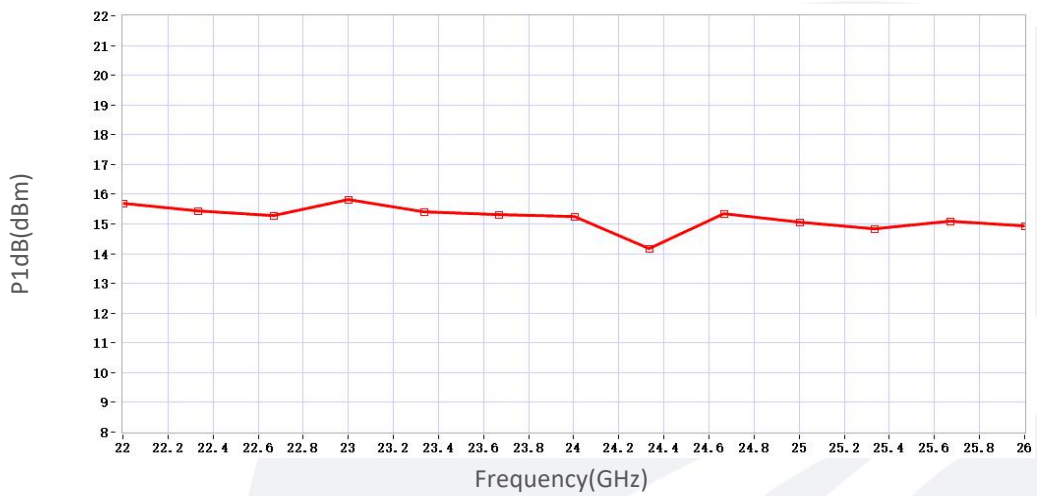

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.