

Coaxial Low-pass Filter

DC-1.24 GHz/SMA Female

Model: TLLF-DC-1G24-L

TLLF-DC-1G24-L is a coaxial low-pass filter with a passband frequency from DC to 1.24 GHz and a rejection frequency @1250 MHz. The maximum insertion loss of the filter is 2.5 dB and the minimum rejection is 3 dB.

Features:

- Passband Frequency Range DC to 1.24GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	DC		1.24	GHz
通带插损 Passband Insertion Loss			2.5	dB
带内波动 Pass band Ripple			1.0	dB
带外抑制 Rejection	>3dB@1250Mhz >30dB@1.8-6G			
耐受功率 Power Handling			2	W
驻波 VSWR			1.5	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	40*12*10	mm

外形图 Outline Drawing:

Unit:mm

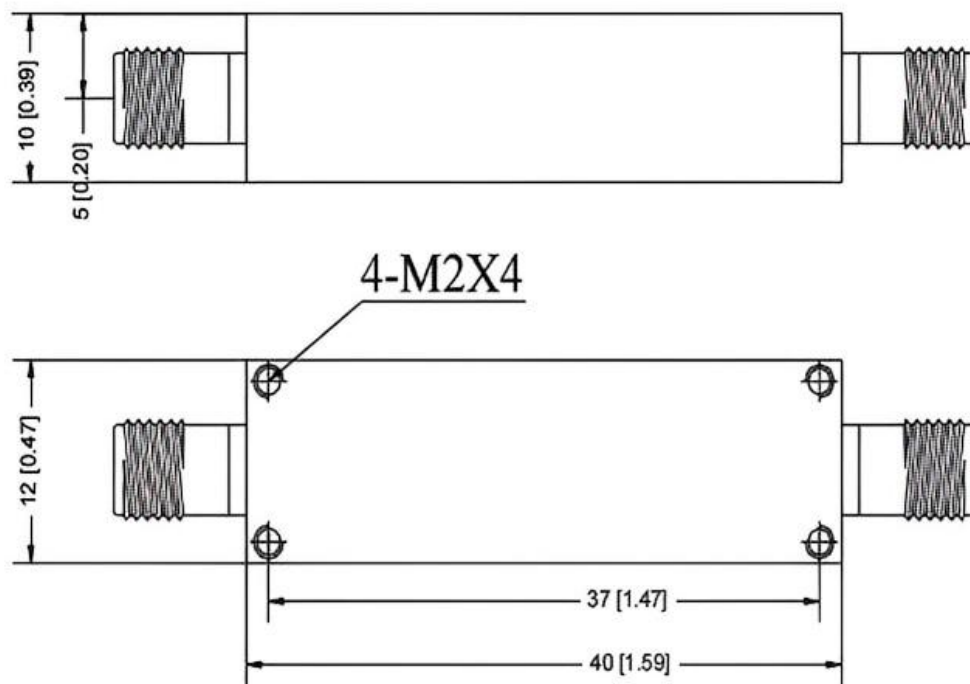


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLF-DC-1G24-L	Coaxial Low-pass Filter, Passband frequency range: DC-1.24GHz, Passband Insertion Loss: 2.5dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

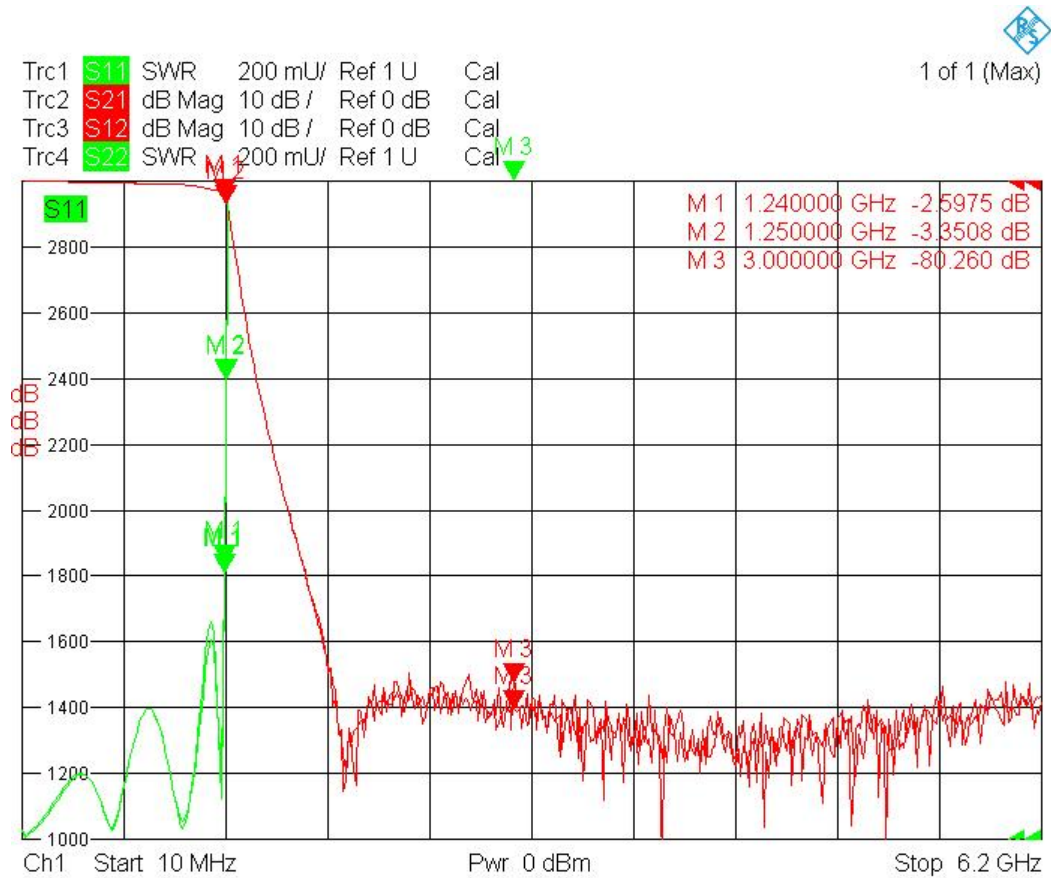

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.