

## Coaxial Low-pass Filter

### DC-2.3 GHz/SMA Female

Model: TLLF-DC-2G3-L

TLLF-DC-2G3-L is a coaxial low-pass filter with a passband frequency from DC to 2.3 GHz and a rejection frequency @2800 MHz. The maximum insertion loss of the filter is 1.8 dB and the minimum rejection is 50 dB.

#### Features:

- Passband Frequency Range DC to 2.3GHz
- Low Insertion Loss

#### Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

### 电气特性 Electrical Characteristics:


| 参数 Parameter                    | Min           | Typ | Max | 单位 Units |
|---------------------------------|---------------|-----|-----|----------|
| 通带频率范围 Passband Frequency range | DC            |     | 2.3 | GHz      |
| 通带插损 Passband Insertion Loss    |               |     | 1.8 | dB       |
| 带内波动 Pass band Ripple           |               |     | 1.2 | dB       |
| 带外抑制 Rejection                  | >50dB@2800Mhz |     |     |          |
| 耐受功率 Power Handling             |               |     | 2   | W        |
| 驻波 VSWR                         |               |     | 1.5 | :1       |
| 阻抗 Impedance                    | 50            |     |     | Ohms     |

### 环境和机械特性 Envriionmental And Physical Characteristics:

| 类型 Description            | 参数 Parameter | 单位 Units |
|---------------------------|--------------|----------|
| 操作温度 Operating Temerature | -40 To +70   | °C       |
| 接口 Connectors             | SMA Female   |          |
| 尺寸 Size                   | 40*12*10     | mm       |

## 外形图 Outline Drawing:

Unit:mm

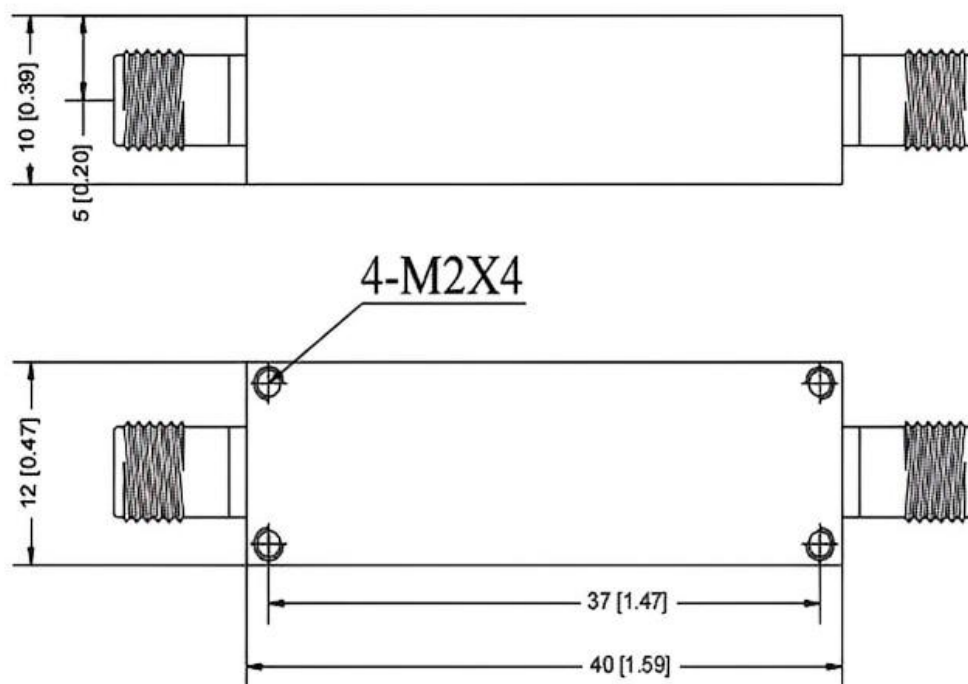

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description                                                                                           | 版本号 Revision |
|------------------|----------------------------------------------------------------------------------------------------------|--------------|
| TLLF-DC-2G3-L    | Coaxial Low-pass Filter, Passband frequency range: DC-2.3GHz, Passband Insertion Loss: 1.8dB, SMA Female | Rev.1.0      |