

Coaxial Low-pass Filter

DC-2 GHz/SMA Female/SMA Male

Model: TLLF-DC-2G-XG

TLLF-DC-2G-XG is a coaxial low-pass filter with a passband frequency from DC to 2 GHz and a rejection frequency from 2.3 GHz to 6 GHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 50 dB.

Features:

- Passband Frequency Range DC to 2GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	DC		2	GHz
通带插损 Passband Insertion Loss			1.0	dB
带内波动 Pass band Ripple			1.0	dB
带外抑制 Rejection	>50dB@2.3-6Ghz			
耐受功率 Power Handling			15	W
驻波 VSWR			1.6	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	°C
接口 Connectors	SMA Female/SMA Male	
尺寸 Size	50*38*12	mm

外形图 Outline Drawing:

Unit:mm

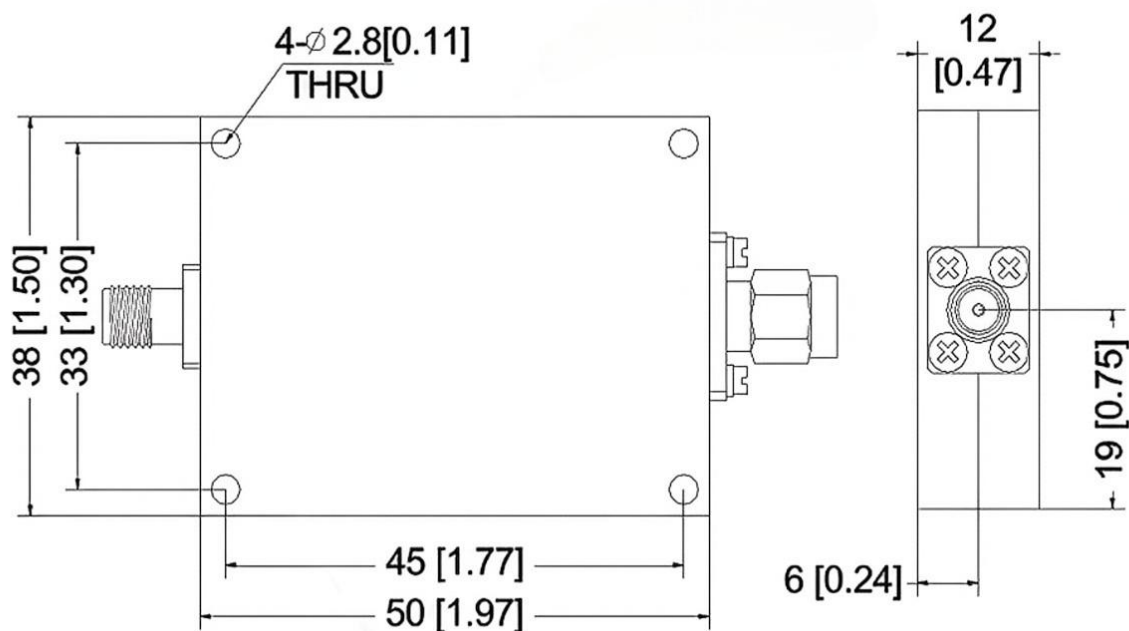


ESD Protection: Strictly
adhere to ESD precautions
to prevent electrostatic
damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLF-DC-2G-XG	Coaxial Low-pass Filter, Passband frequency range: DC-2GHz, Passband Insertion Loss: 1.0dB, SMA Female/SMA Male	Rev.1.0

典型曲线 Typical Performance Data:

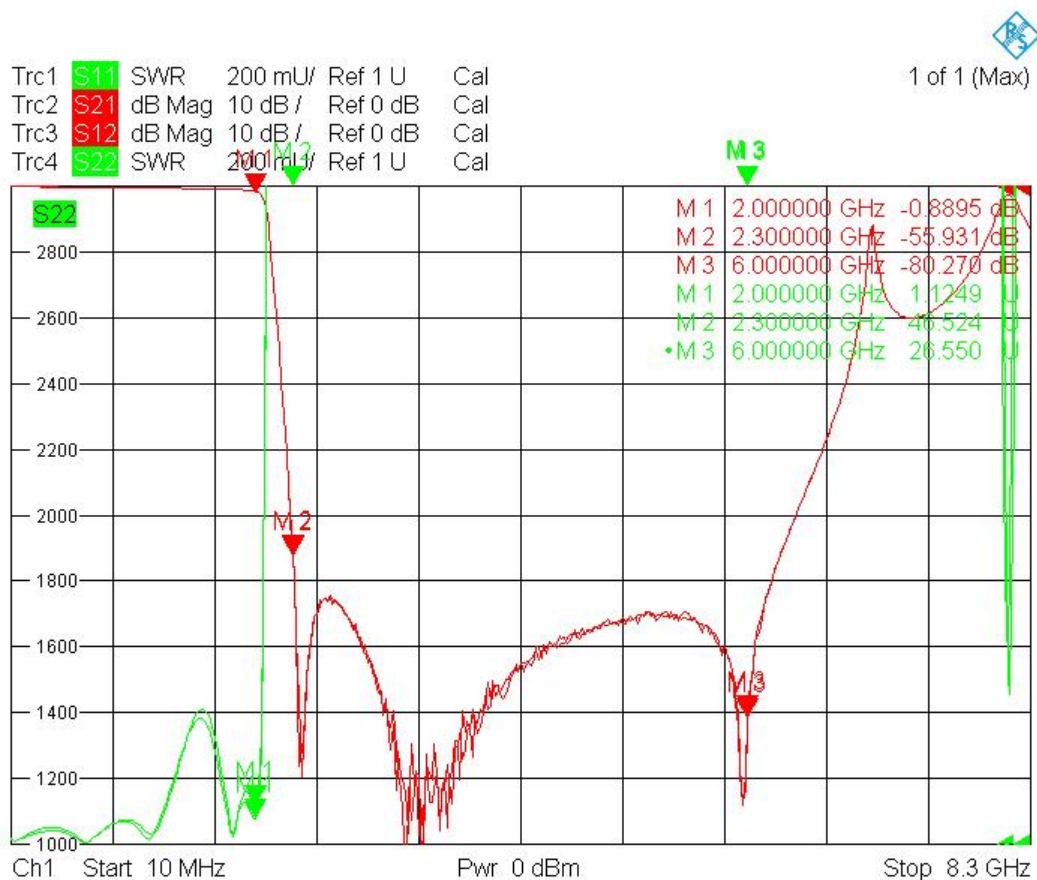

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.