

Coaxial Low-pass Filter

DC-22GHz/SMA Female

Model: TLLF-DC-22G-X

TLLF-DC-22G-X is a coaxial low-pass filter with a passband frequency from 0 to 22GHz and a rejection frequency from 24 to 25 GHz. The nominal insertion loss of the filter is 1.6 dB and the typical rejection is 30 dB.

Features:

- Passband Frequency Range DC to 22GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	DC		22	GHz
通带插损 Passband Insertion Loss			1.6	dB
带内纹波 Pass Band Ripple			1.5	dB
带外抑制 Rejection@24-25GHz	30			dB
耐受功率 Power Handling			15	W
输入驻波 Input VSWR			1.8	:1
输出驻波 Output VSWR			1.8	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	°C
存储温度 Storage Temperature	-40 to +70	°C
接口 Connectors	SMA Female	

外形图 Outline Drawing: Unit:mm

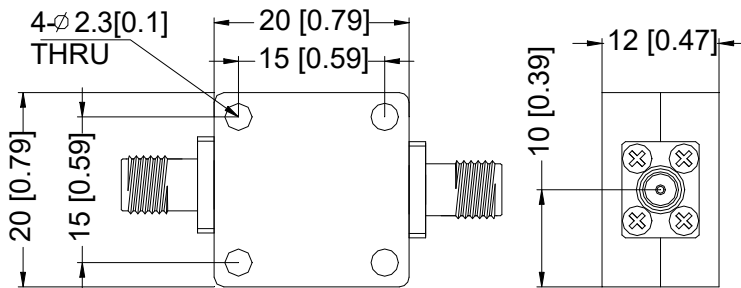

ESD Protection: Strictly
adhere to ESD precautions
to prevent electrostatic
damage.


订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLF-DC-22G-X	Coaxial Low-pass Filter, Passband frequency range: DC-22GHz, Passband Insertion Loss: 1.6dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

Insertion Loss vs Frequency

Insertion Loss(dB)

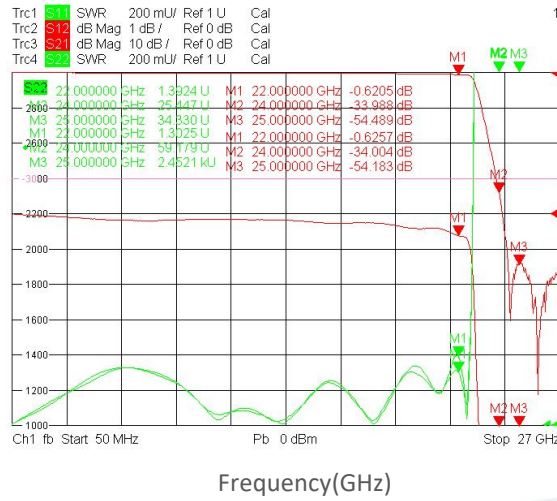

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.