

Coaxial Low-pass Filter

DC-900 MHz/SMA Female

Model: TLLF-DC-900M-L

TLLF-DC-900M-L is a coaxial low-pass filter with a passband frequency from DC to 900 MHz and a rejection frequency @1000MHz. The maximum insertion loss of the filter is 3.0 dB and the minimum rejection is 20 dB.

Features:

- Passband Frequency Range DC to 900MHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	DC		900	MHz
通带插损 Passband Insertion Loss			3.0	dB
通带插损 Passband Insertion Loss@DC-880M			1.2	dB
带内波动 Pass band Ripple			1.0	dB
带外抑制 Rejection	>20dB@1000Mhz			
耐受功率 Power Handling			2	W
驻波 VSWR			1.6	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸Size	40*12*10	mm

外形图 Outline Drawing:

Unit:mm

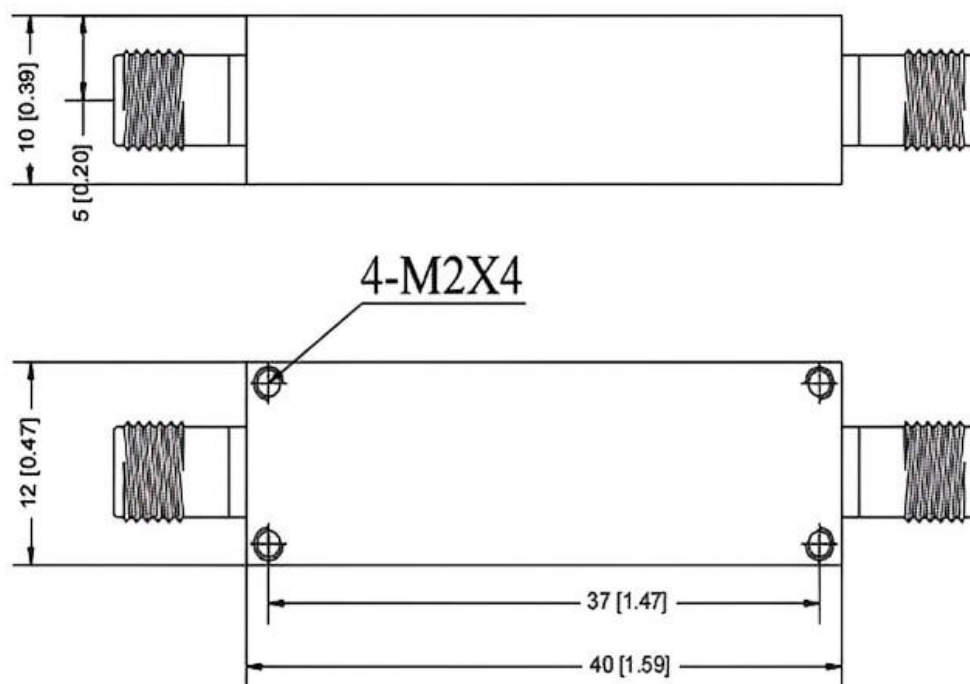


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLF-DC-900M-L	Coaxial Low-pass Filter, Passband frequency range: DC-900MHz, Passband Insertion Loss: 3.0dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

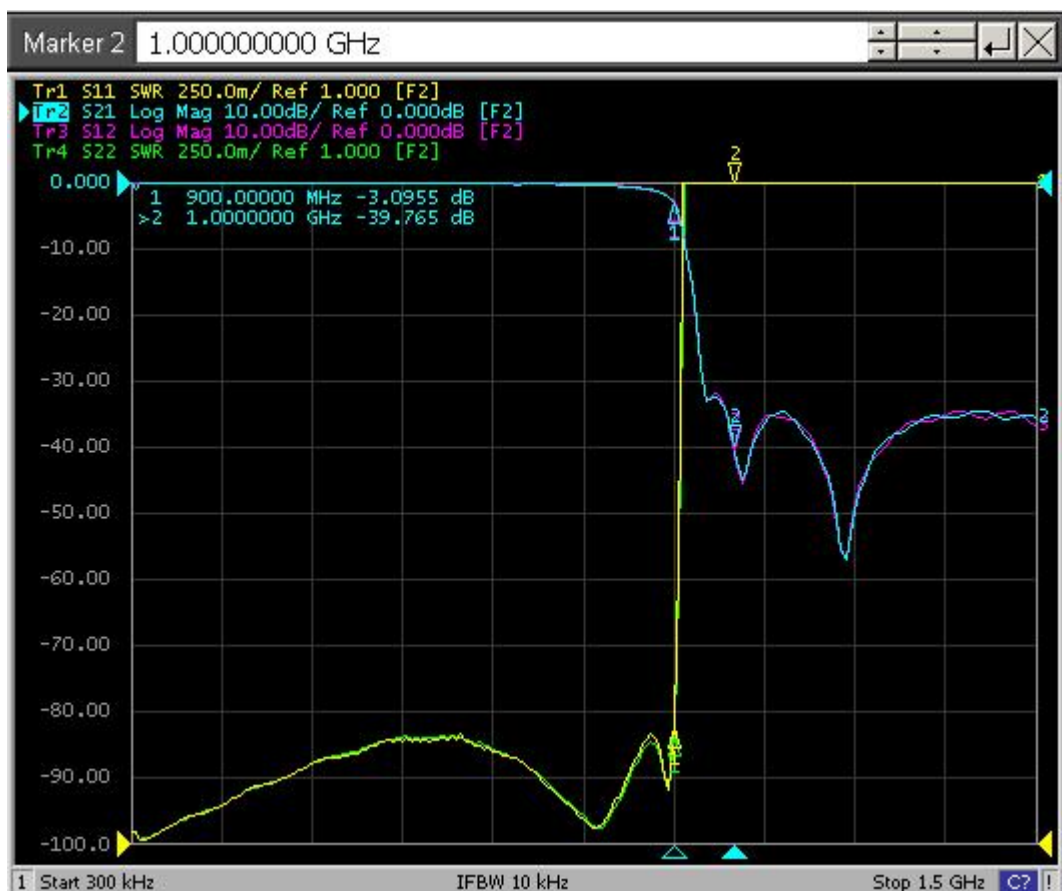

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.