

Coaxial High-pass Filter

28-40 GHz/2.92mm Female

Model: TLHF-28G-40G-X

TLHF-28G-40G-X is a coaxial High-pass filter with a passband frequency from 28 to 40 GHz and a rejection frequency from DC to 22820 MHz. The maximum insertion loss of the filter is 0.75 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 28 to 40GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
带通频率范围 Passband Frequency range	28		40	GHz
带宽 Band Width			12	GHz
通带插损 Passband Insertion Loss			0.75	dB
带内纹波 Pass Band Ripple			1.2	dB
驻波 VSWR			1.8	:1
带外抑制 Rejection@DC-22820MHz	40			dB
耐受功率 Power Handling			15	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	2.92mm Female	
尺寸 Size	10*20*24	mm

外形图 Outline Drawing:

Unit:mm

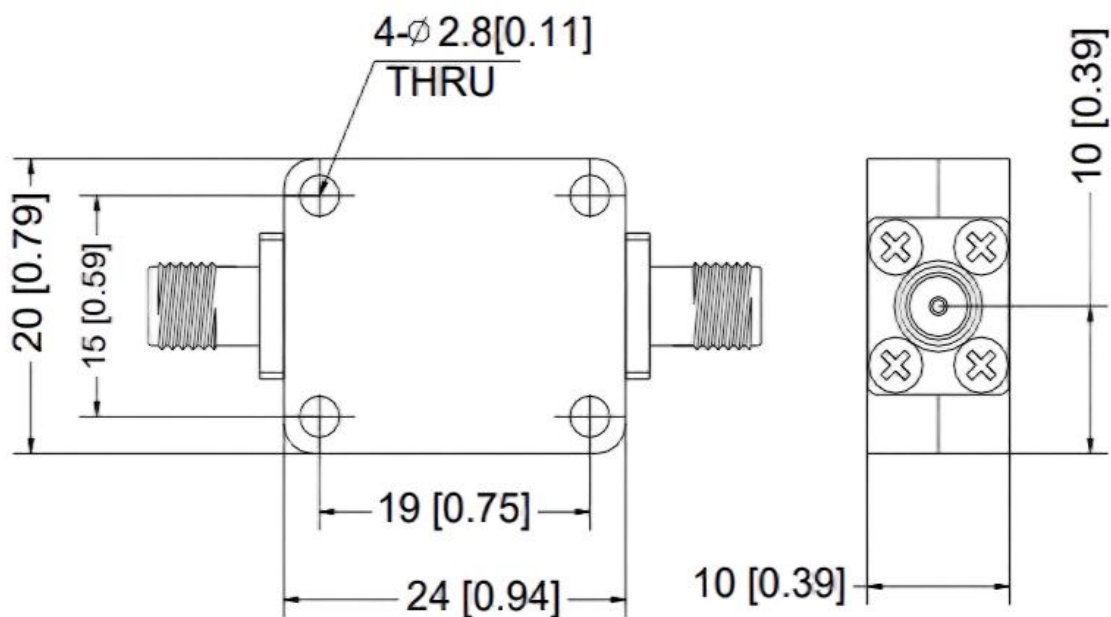


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLHF-28G-40G-X	Coaxial High-pass Filter, Passband frequency range: 28-40GHz, Passband Insertion Loss: 0.75dB, 2.92mm Female Coaxial Fixed Termination	Rev.1.1

典型曲线 Typical Performance Data:

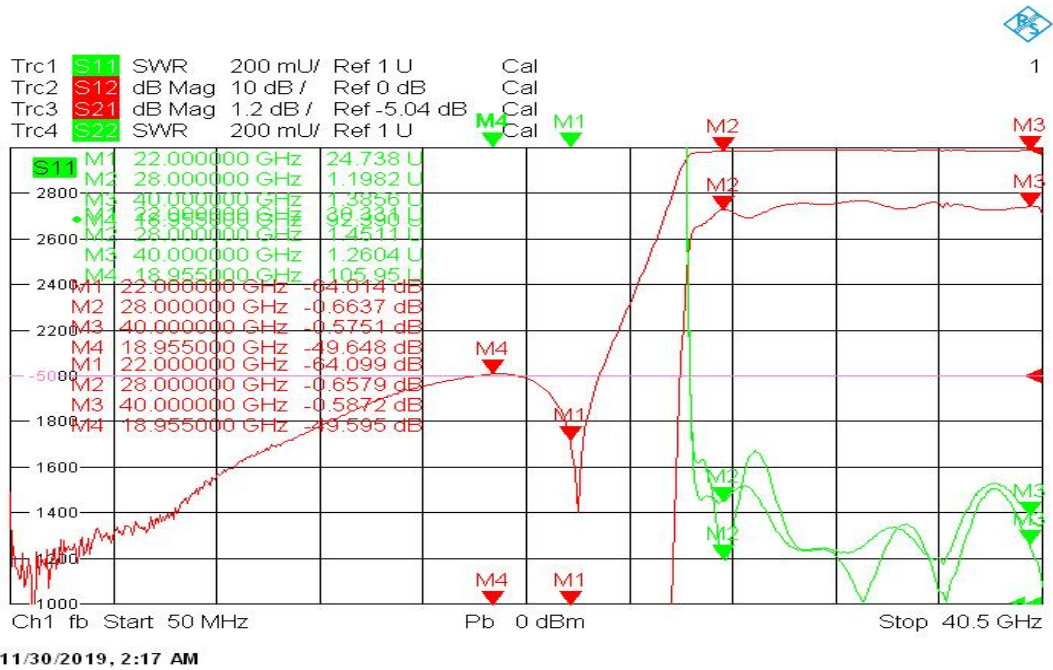

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.