

Coaxial High-pass Filter

0.4-6.7 GHz/SMA Female

Model: TLHF-400M-6G7-X

TLHF-400M-6G7-X is a coaxial High-pass filter with a passband frequency from 0.4 to 6.7 GHz and a rejection frequency from DC to 0.08 GHz. The maximum insertion loss of the filter is 1.5 dB and the minimum rejection is 50 dB.

Features:

- Passband Frequency Range 0.4 to 6.7GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
带通频率范围 Passband Frequency range	0.4		6.7	GHz
通带插损 Passband Insertion Loss			1.5	dB
带内纹波 Pass Band Ripple			1.2	dB
驻波 VSWR			1.8	:1
带外抑制 Rejection@DC-0.08GHz	50			dB
耐受功率 Power Handling			10	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	12.7*35*66	mm

外形图 Outline Drawing:

Unit:mm

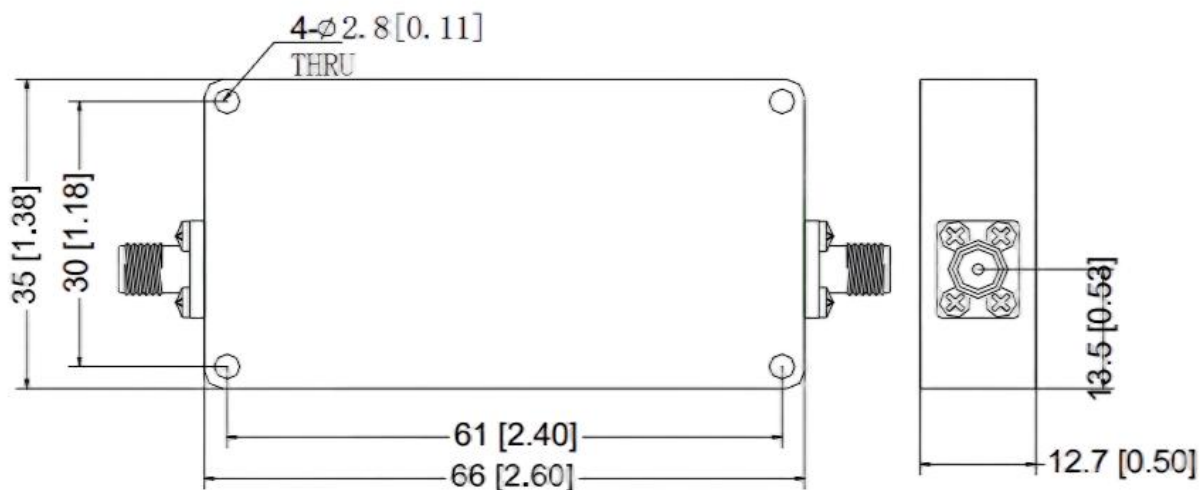


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLHF-400M-6G7-X	Coaxial High-pass Filter, Passband frequency range: 0.4-6.7GHz, Passband Insertion Loss: 1.5dB, SMA Female Coaxial Fixed Termination	Rev.1.1

典型曲线 Typical Performance Data:

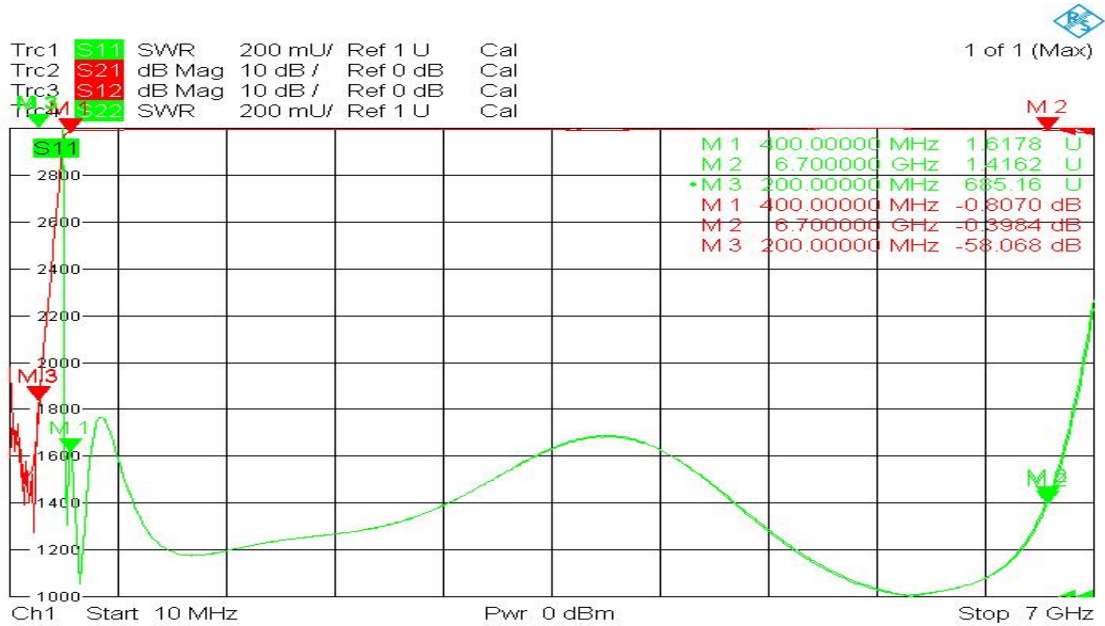

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.