

Coaxial High-pass Filter

600-5600 MHz/SMA Female

Model: TLHF-600M-5600M-L

TLHF-600M-5600M-L is a coaxial High-pass filter with a passband frequency from 600 to 5600 MHz and a rejection frequency from DC to 300 MHz. The maximum insertion loss of the filter is 1.8 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 600 to 5600MHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
带通频率范围 Passband Frequency range	600		5600	MHz
通带插损 Passband Insertion Loss			1.8	dB
带内纹波 Pass Band Ripple			1.6	dB
驻波 VSWR			1.7	:1
带外抑制 Rejection@DC-300MHz	40			dB
耐受功率 Power Handling			2	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envriomental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	10*12*40.4	mm

外形图 Outline Drawing:

Unit:mm

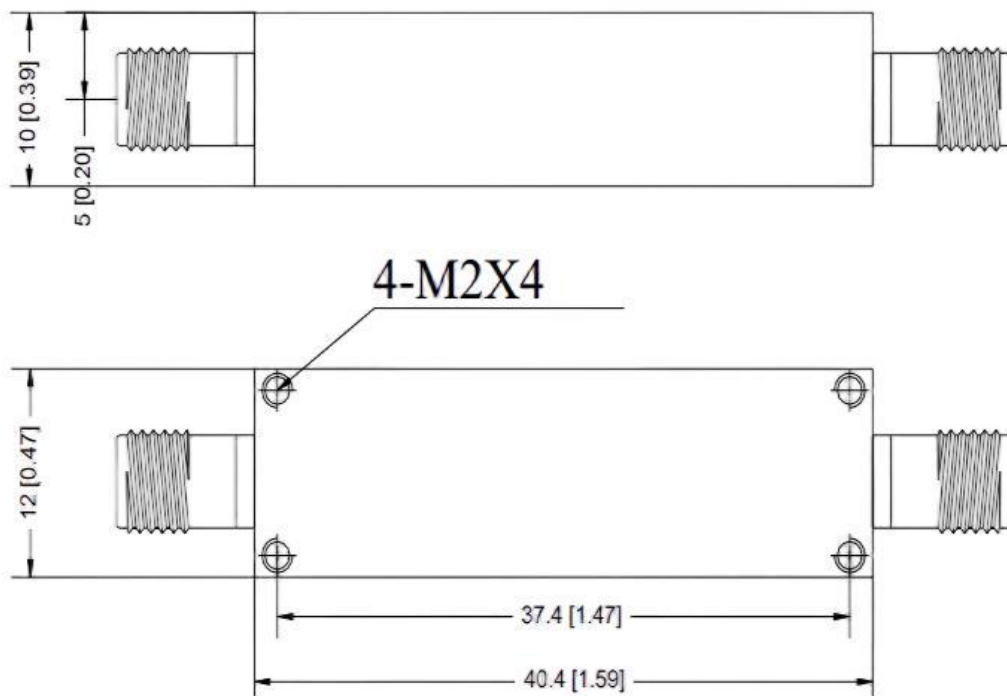

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLHF-600M-5600M-L	Coaxial High-pass Filter, Passband frequency range: 600-5600MHz, Passband Insertion Loss: 1.8dB, SMA Female Coaxial Fixed Termination	Rev.1.1