

Coaxial Band-pass Filter

20-24 GHz/2.92mm Female

Model: TLBF-20G-24G-E

TLBF-20G-24G-E is a coaxial band-pass filter with a passband frequency from 20 to 24 GHz and a rejection frequencies 15.3 GHz to 28.7 GHz. The maximum insertion loss of the filter is 1.5 dB and the typical rejection is 55 dB.

Features:

- Passband Frequency Range 20 to 24 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	20		24	GHz
带宽 Band Width			4	GHz
通带插损 Passband Insertion Loss			1.5	dB
带内波动 Pass Band Ripple			1.2	dB
带外抑制 Rejection	>55dB@f0±4.7Ghz			dB
耐受功率 Power Handling			15	W
驻波 VSWR			1.6	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	2.92mm Female	

外形图 Outline Drawing:

Unit:mm

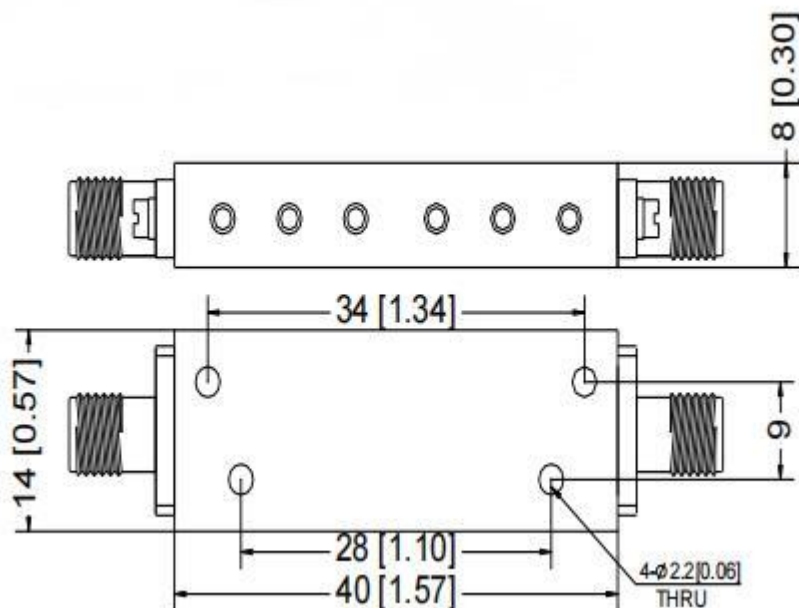


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-20G-24G-E	Coaxial Band-pass Filter, Passband frequency range: 20-24GHz, Passband Insertion Loss: 1.5dB, 2.92mm Female	Rev.1.0

典型曲线 Typical Performance Data:

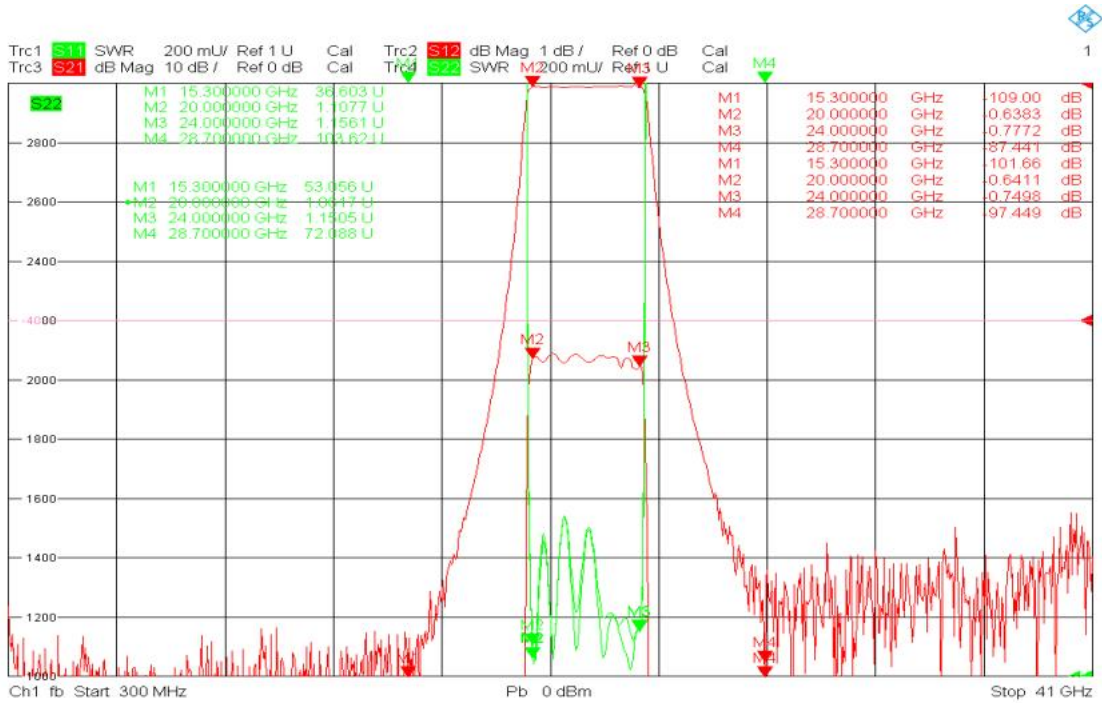

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.