

Coaxial Band-pass Filter

Center Frequency 1000 MHz/SMA Female

Model: TLBF-1G-800M-L

TLBF-1G-800M-L is a coaxial band-pass filter with a passband center frequency at 1000 MHz and a rejection frequencies point at 400 MHz and 1800 MHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 50 dB.

Features:

- Passband Center Frequency 1000 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		600		1400	MHz
带宽 Band Width				800	MHz
通带插损 Passband Insertion Loss				1.0	dB
带内纹波 Pass Band Ripple				0.8	dB
驻波 VSWR				1.6	:1
带外抑制 Rejection	@500MHz&1700M Hz	30			dB
	@400MHz&1800M Hz	50			dB
耐受功率 Power Handling				2	W
阻抗 Impedance		50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	10*12*40.4	mm

外形图 Outline Drawing: Unit:mm

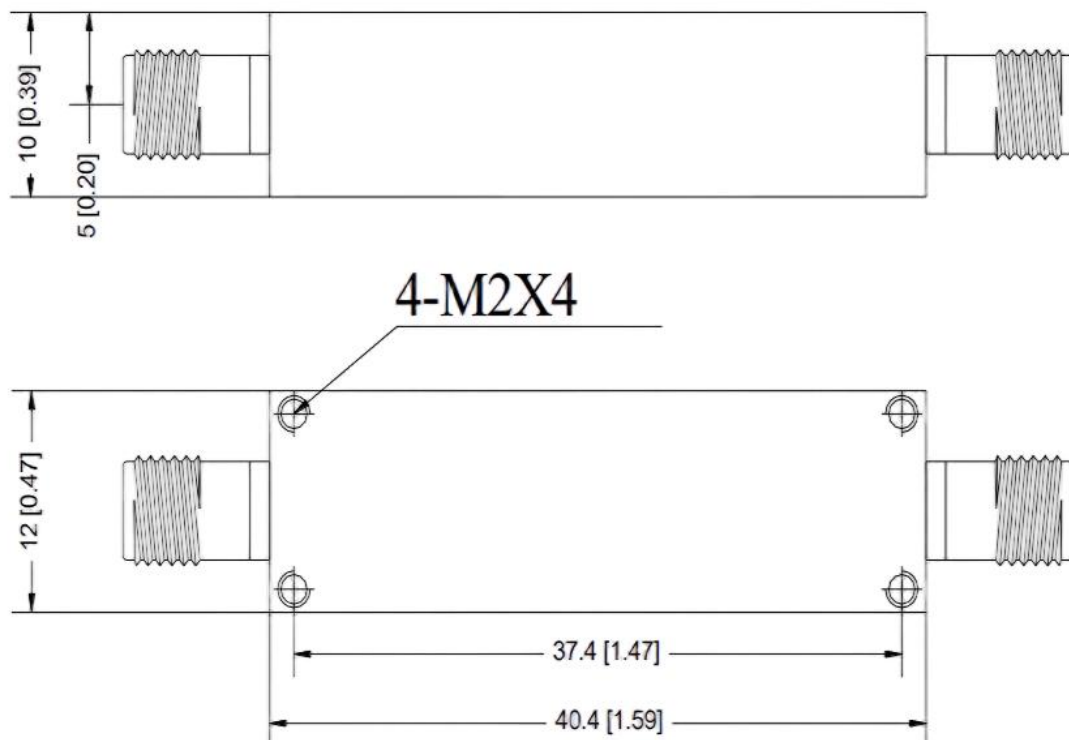

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-1G-800M-L	Coaxial Band-pass Filter, Passband center frequency: 1000MHz, Passband Insertion Loss: 1.0dB, SMA Female	Rev.1.0