

Coaxial Band-pass Filter

2377.5-2382.5 MHz/SMA Female

Model: TLBF-2G38-5M-E

TLBF-2G38-5M-E is a coaxial band-pass filter with a passband frequency from 2377.5 to 2382.5 MHz and a rejection frequencies from DC to 2200 MHz and 2600 MHz. The maximum insertion loss of the filter is 1.9 dB and the minimum rejection is 60 dB.

Features:

- Passband Frequency Range 2377.5 to 2382.5 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	2377.5		2382.5	MHz
带宽 Band Width			5	MHz
插损 Insertion Loss(f0)			1.9	dB
带内纹波 Pass Band Ripple			1.5	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@DC-2200MHz&2600MHz	60			dB
耐受功率 Power Handling			50	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	30*49*137	mm

外形图 Outline Drawing: Unit:mm

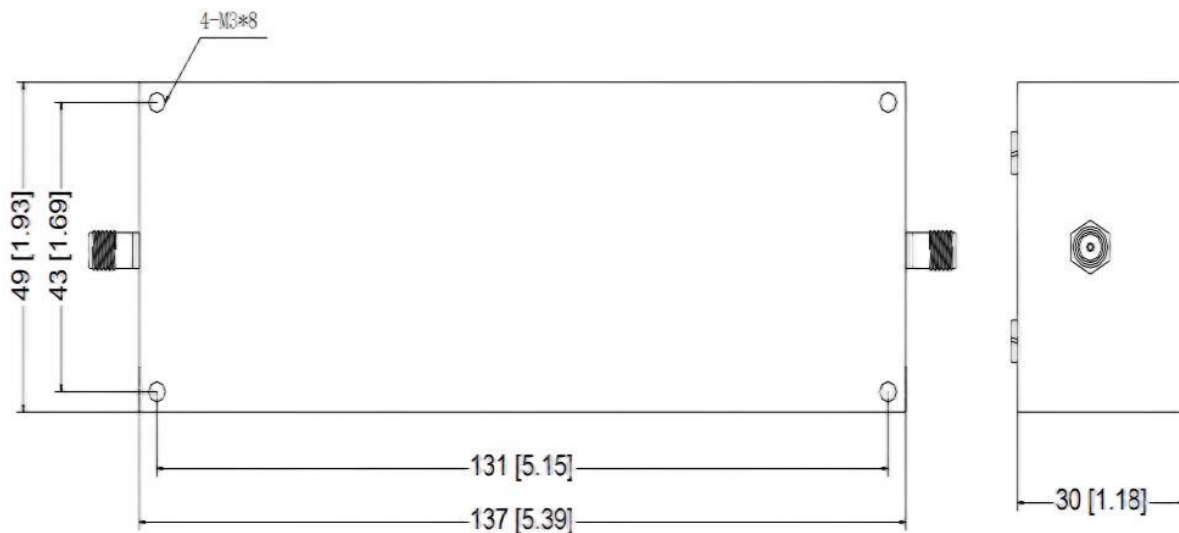

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-2G38-5M-E	Coaxial Band-pass Filter, Passband frequency range: 2377.5-2382.5MHz, Insertion Loss(f0): 1.9dB, SMA Female	Rev.1.0