

Coaxial Band-pass Filter

2170-2200 MHz/SMA Female

Model: TLBF-2G185-30M-E

TLBF-2G185-30M-E is a coaxial band-pass filter with a passband frequency from 2170 to 2200 MHz and a rejection frequencies point at 2140 MHz and 2230 MHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 30 dB.

Features:

- Passband Frequency Range 2170 to 2200 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	2170		2200	MHz
带宽 Band Width			30	MHz
插损 Insertion Loss(f0)			1.0	dB
带内纹波 Pass Band Ripple			0.8	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@2140MHz&2230MHz	30			dB
耐受功率 Power Handling			10	W
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	℃
接口 Connectors	SMA Female	
尺寸 Size	22*45*45	mm

外形图 Outline Drawing: Unit:mm

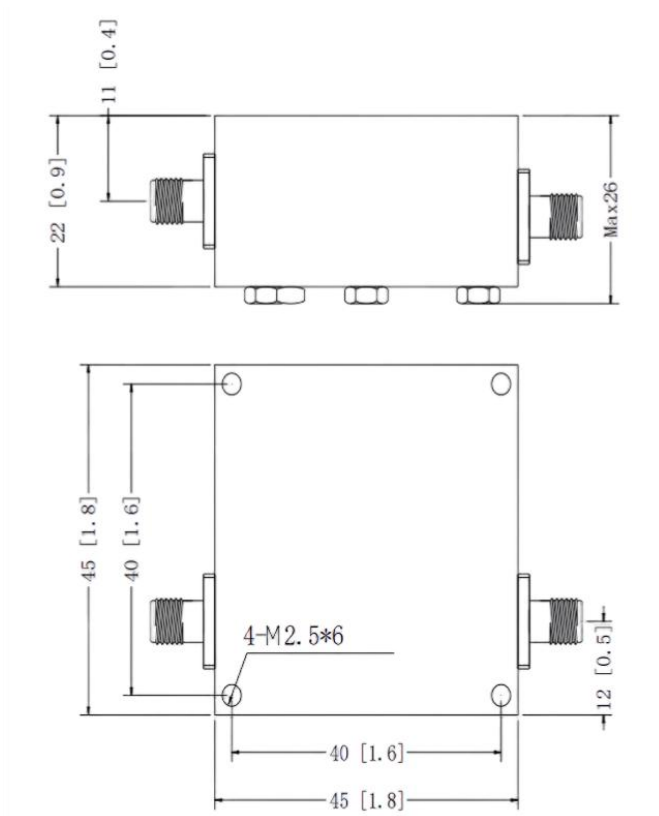

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-2G185-30M-E	Coaxial Band-pass Filter, Passband frequency range: 2170-2200MHz, Insertion Loss(f0): 1.0dB, SMA Female	Rev.1.0