

Coaxial Band-pass Filter

2-30 MHz/SMA Female

Model: TLBF-2M-30M-L2

TLBF-2M-30M-L2 is a coaxial band-pass filter with a passband frequency from 2 to 30 MHz and a rejection frequencies from DC to 1.3 MHz and point at 40 MHz. The maximum insertion loss of the filter is 2.2 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 2 to 30 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	2		30	MHz
带宽 Band Width			28	MHz
插损 Insertion Loss(f0)			2.2	dB
带内纹波 Pass Band Ripple			2.0	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@DC-1.3MHz&40MHz	40			dB
耐受功率 Power Handling			2	W
阻抗 Impedance	30			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	℃
接口 Connectors	SMA Female	
尺寸 Size	10*12*40.4	mm

外形图 Outline Drawing:

Unit:mm

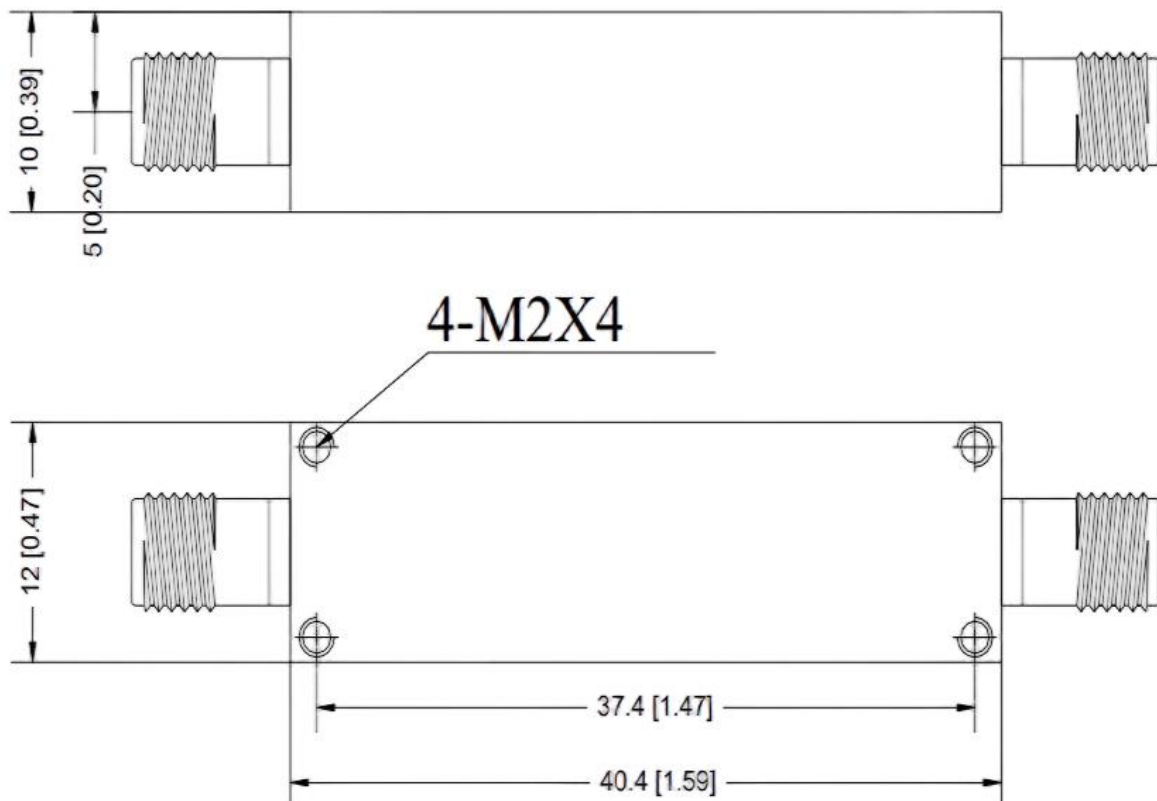

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-2M-30M-L2	Coaxial Band-pass Filter, Passband frequency range: 2-30MHz, Insertion Loss(f0): 2.2dB, SMA Female	Rev.1.0