

Coaxial Band-pass Filter

5-6 GHz/SMA Female

Model: TLBF-5G5-1G-E

TLBF-5G5-1G-E is a coaxial band-pass filter with a passband frequency from 5 to 6 GHz and a rejection frequencies from 4.4 GHz to 6.6 GHz. The maximum insertion loss of the filter is 1.8 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 5 to 6 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	5		6	GHz
带宽 Band Width			1	GHz
通带插损 Passband Insertion Loss			1.8	dB
带内波动 Pass Band Ripple			1.6	dB
带外抑制 Rejection	>40dB@Fc±600Mhz			
耐受功率 Power Handling			10	W
驻波 VSWR			1.6	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +70	°C
接口 Connectors	SMA Female	

外形图 Outline Drawing: Unit:mm

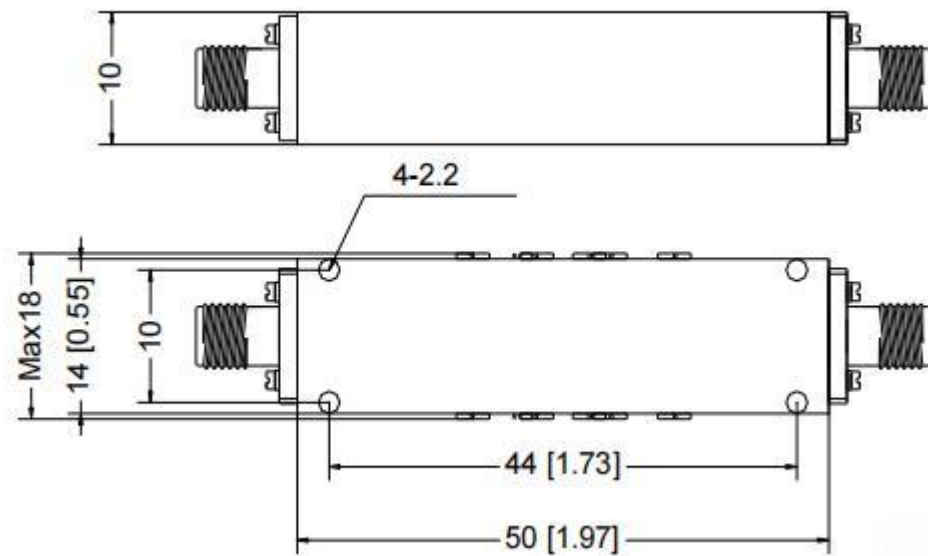

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-5G5-1G-E	Coaxial Band-pass Filter, Passband frequency range: 5-6GHz, Passband Insertion Loss: 1.8dB, SMA Female	Rev.1.0