

Coaxial Band-pass Filter

9.5-10.5 MHz/SMA Female

Model: TLBF-10M-5-L

TLBF-10M-5-L is a coaxial band-pass filter with a passband frequency from 9.5 to 10.5 MHz and a rejection frequencies from DC to 1 MHz and from 20 to 25 MHz. The maximum insertion loss of the filter is 3.5 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 9.5 to 10.5 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	9.5		10.5	MHz
带宽 Band Width			1	MHz
插损 Insertion Loss(f0)			3.5	dB
带内纹波 Pass Band Ripple			2.3	dB
驻波 VSWR			1.6	:1
带外抑制 Rejection@DC-1MHz&20-25MHz	40			dB
耐受功率 Power Handling			2	W
阻抗 Impedance	50			Ohms

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	°C
接口 Connectors	SMA Female	
尺寸 Size	10*12*40.4	mm

外形图 Outline Drawing: Unit:mm

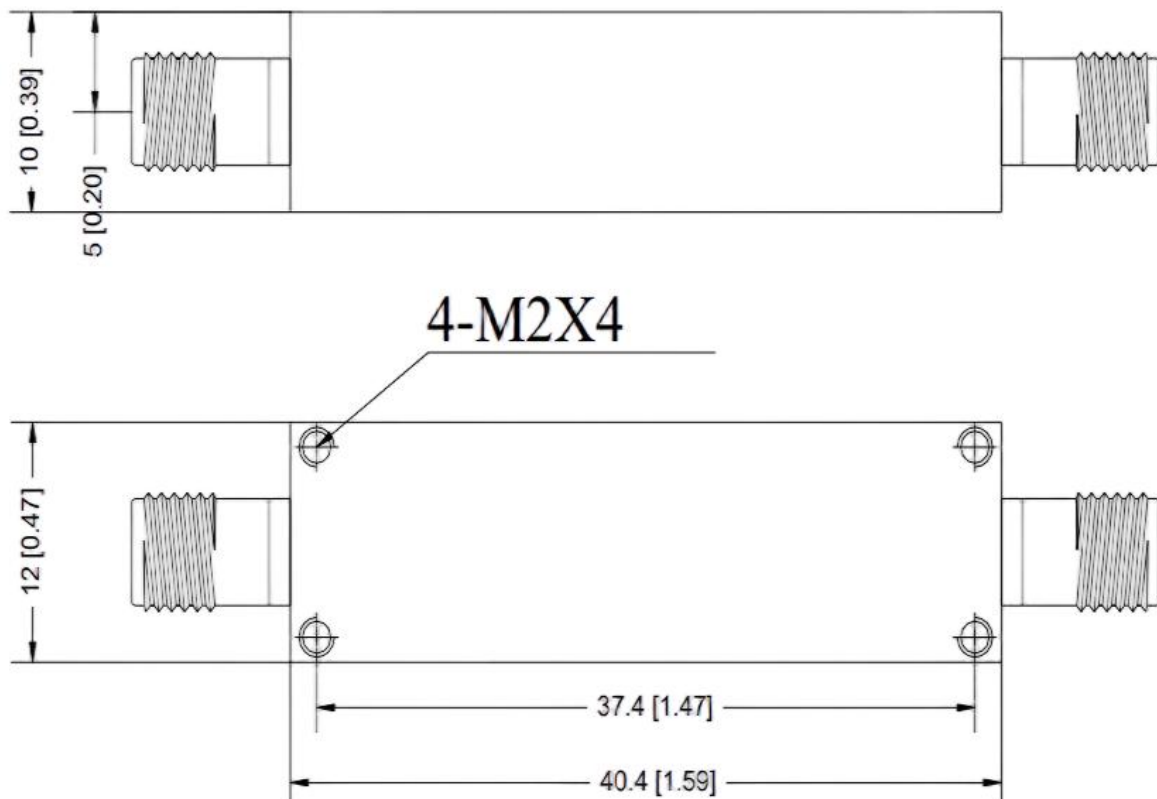


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-10M-5-L	Coaxial Band-pass Filter, Passband frequency range: 9.5-10.5MHz, Insertion Loss(f0): 3.5dB, SMA Female	Rev.1.0

典型曲线 Typical Performance Data:

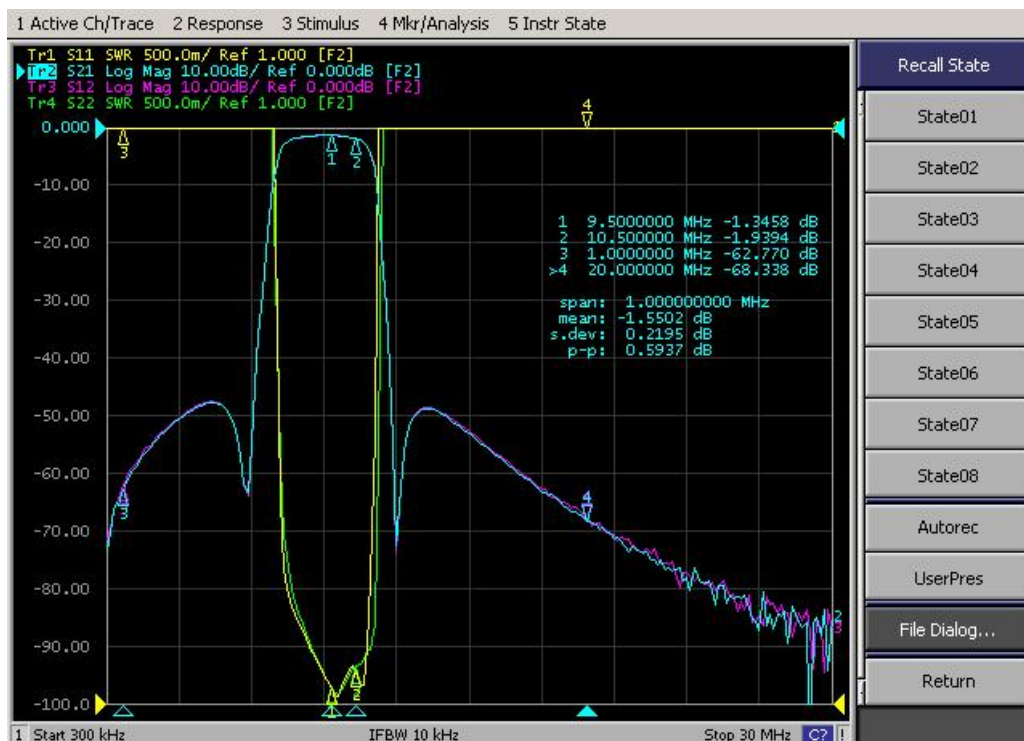

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.