

Waveguide to Coax Adapter, End Launch WR-19/2.4mm Male/39.2-50GHz

Model: TL-19WCA2.4ME

The TL-19WCA2.4ME is end launch waveguide to coax adapters that cover the frequency range of 39.2 to 50GHz. It is designed for an efficient transition between the rectangular waveguide and 2.4mm male coax connector.

Features:

- Operating Frequency 39.2 to 50GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	39.2		50	GHz
插损 Insertion Loss		0.5		dB
驻波 VSWR		1.2		:1

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
材质 Material	Aluminum	
表面处理 Finish	Gold Plated	
同轴接口 Coax Connector	2.4mm Male	
波导 Waveguide	WR-19/UG-383/U-M	

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

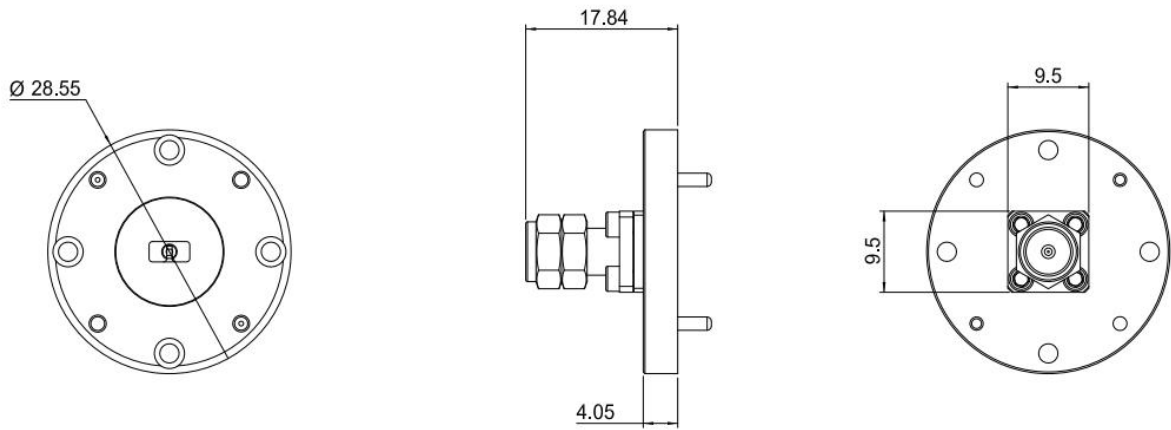


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TL-19WCA2.4ME	Waveguide to Coax Adapter, End Launch WR-19/2.4mm Male,39.2-50GHz	Rev.1.0

典型曲线 Typical Performance Data:

VSWR vs Frequency

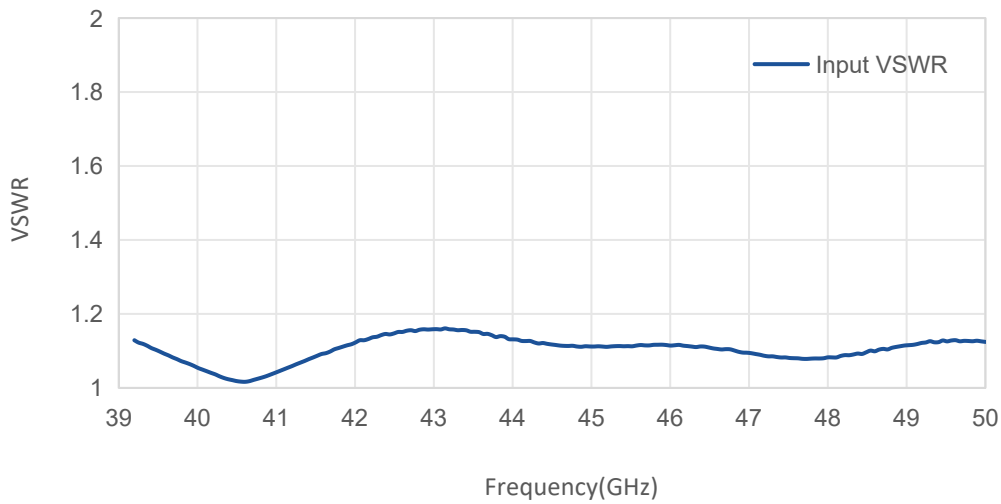

Insertion Loss vs Frequency

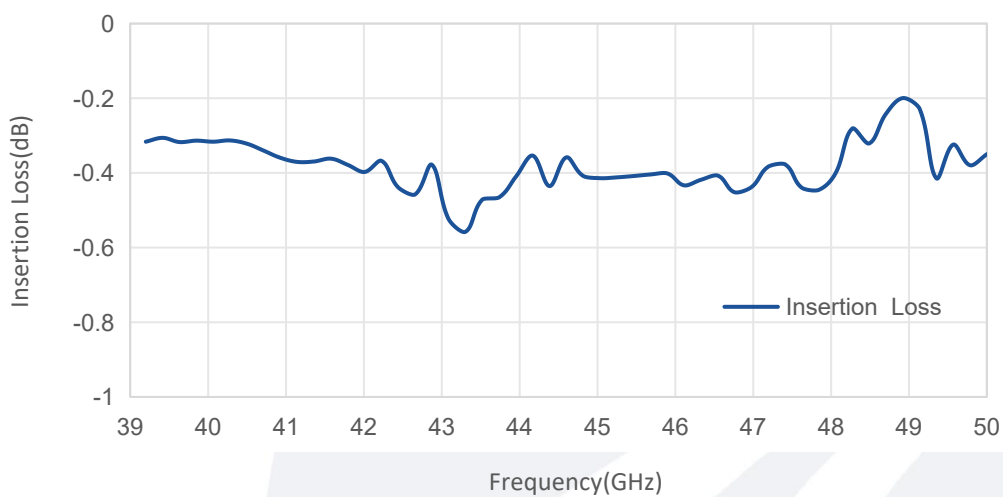

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.