

Y-Band Compact Waveguide Twist

WR-4.3/170-260GHz/Twist Bend/13.3mm

Model: TLTB-170260-4-B

TLTB-170260-4-B is a WR-4.3, 90°, compact waveguide twist with a UG-387/U-M flange on one end. The opposite end is compatible with a UG-387/U-M flange. The overall length of the twist is 13.3 mm. The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide twist is offered to cover the frequency range of 170 to 260 GHz.

Features:

- Frequency Coverage: 170 to 260 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss
- Compact Size

Applications:

- Test Instrumentation
- Sub-assemblies
- Lab Use

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率 Frequency	170		260	GHz
插入损耗 Insertion Loss		0.5		dB
回波损耗 Return Loss		-20		dB

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
波导规格 Waveguide Size	WR-4.3/UG-387/U	
扭转角 Twist Angle	90	°
材料 Material	Brass	
尺寸 Size	20*20*13.3	mm

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

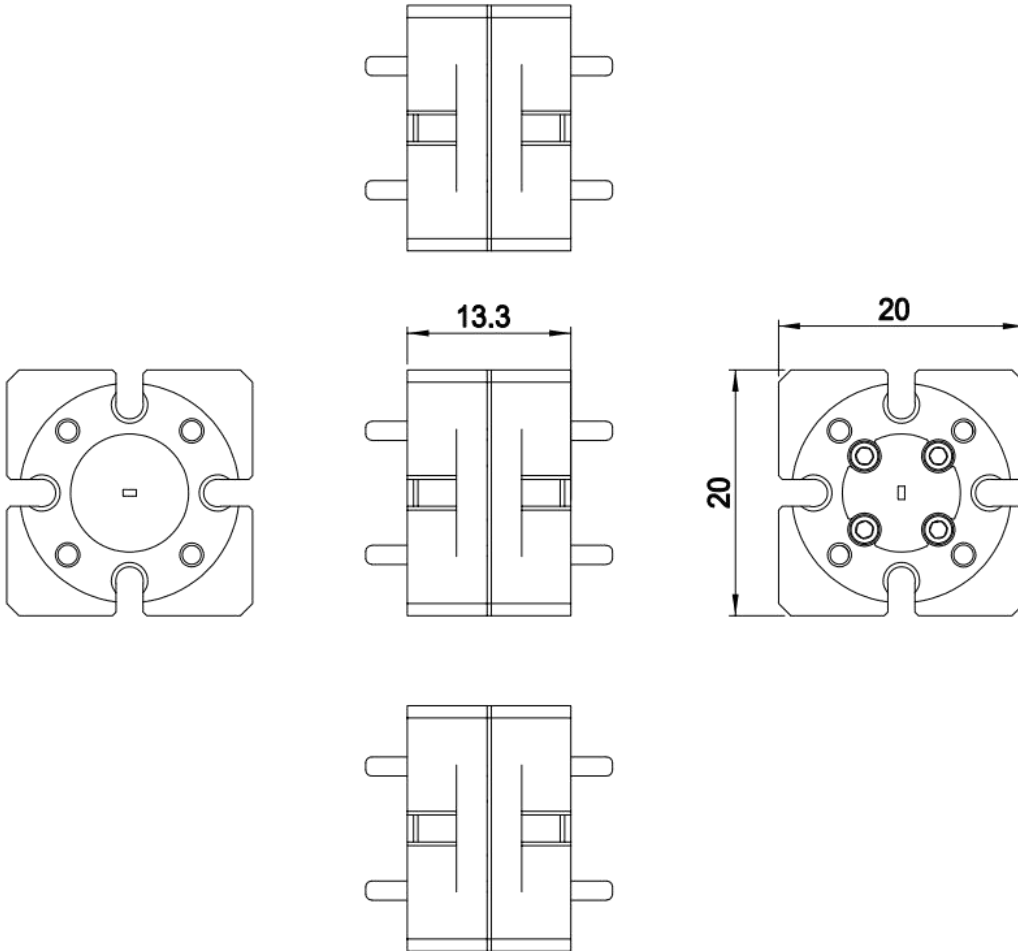


订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLTB-170260-4-B	170-260GHz Compact Waveguide Twist WR-4.3, Twist Bend	Rev.1.0

典型曲线 Typical Performance Data:

Return Loss vs Frequency

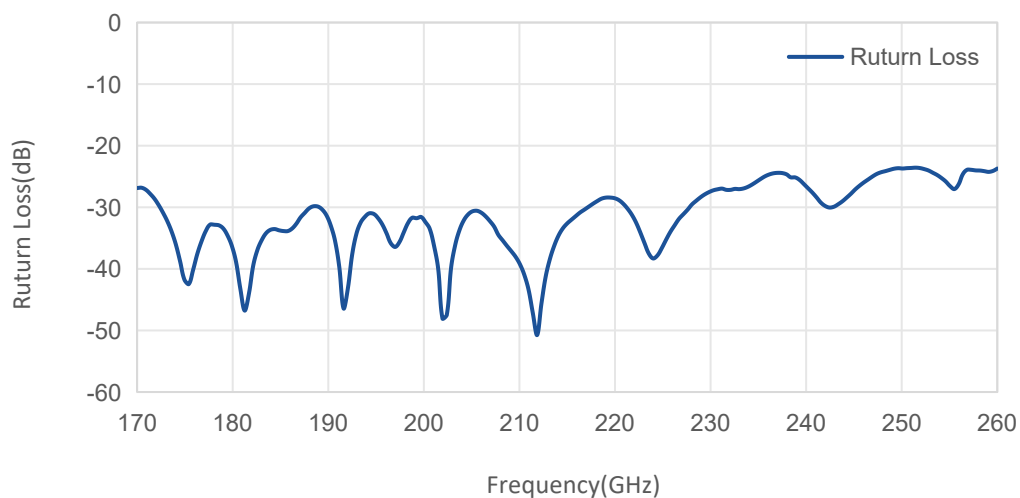

Insertion Loss vs Frequency

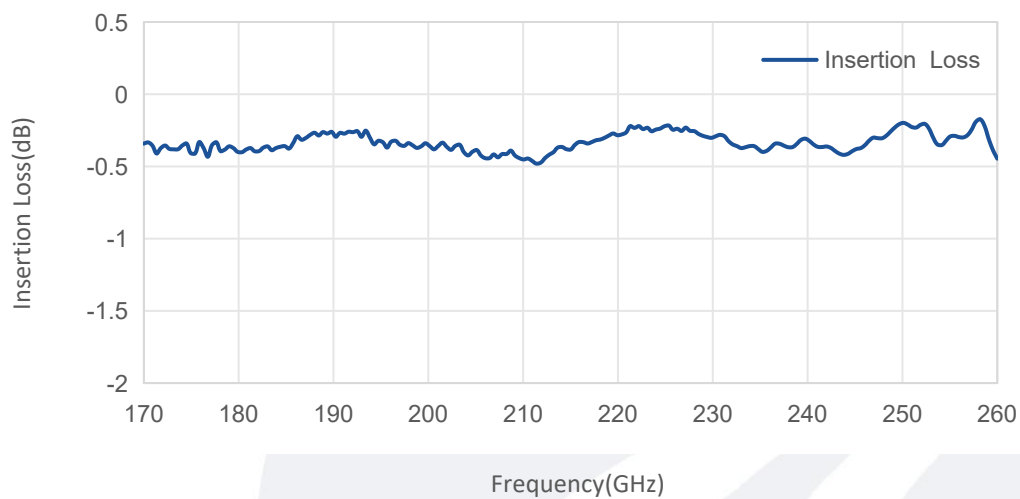

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.