泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

W-Band Reflective FET Switch

75-110 GHz/SP4T/ WR-10 Model: TMSP4T-075110-10

TheTMSP4T-075110-10 is a W-Band switch with a TTL driver that operates between 75 and 110 GHz. The SP4T switch offers 45 dB port-to-port isolation with a typical switching speed of 100 nanoseconds. The input and output connectors of the switch are WR-10.

Features:

- Frequency range: 75-110GHz
- Insertion Loss: 7dB
- Power Handling : 36 dBm
- High Isolation
- Switch Type: Reflective

Applications:

- Communication Systems
- Automatic Test Equipment
- Switching Network

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	75		110	GHz
插损 Insertion Loss		7		dB
隔离 Isolation		45		dB
切换速度 Switch Speed		100		ns
输入驻波 Input VSWR		1.4		:1
输出驻波 Output VSWR		1.6		:1
功率压缩 P1dB Output P1dB		20		dBm
直流电压 DC Voltage		+5		V DC
控制电压 Control Voltage TTL	“0”=Low;“1”=High			V
直流电流 DC Supply Current		100		mA
开关类型 Switch type	Reflective			

绝对最大值 Absolute Maximum Ratings :

参数 Parameter	描述 Description	单位 Units
供电偏置电压 Supply Bias Voltage	+5（+5%）	V
射频输入功率 RF Input Power	36	dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

机械特性 Mechanical Specifications:

参数 Parameter	描述 Description	单位 Units
输入/输出接口 Input /Output Connector	WR-10/UG-387/U	
直流控制接口 Control Bias	Solder Pin	
尺寸 Size	98*40*20	mm

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

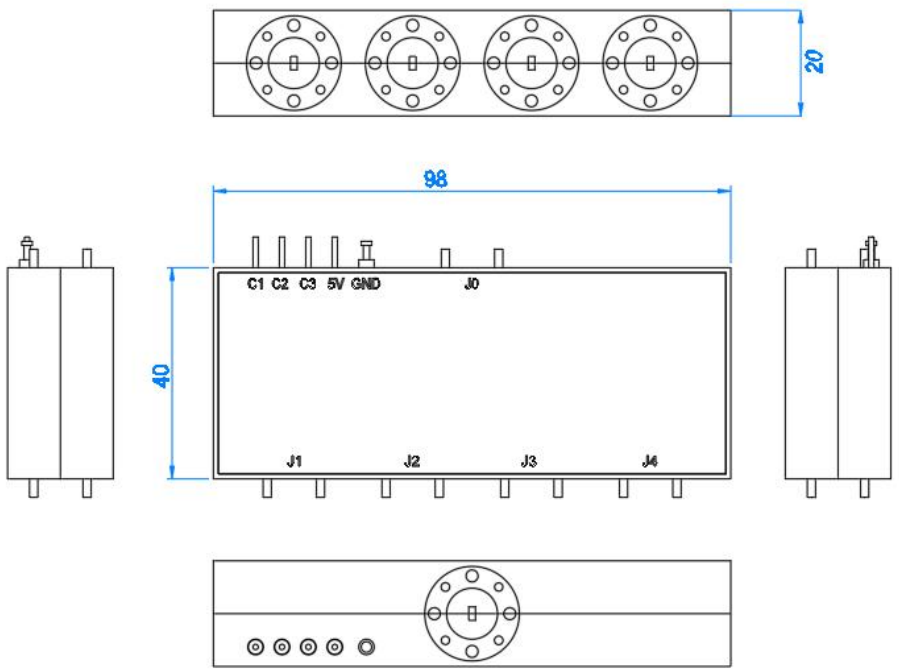

真值表 Truth Table			
TTL Control Input			Signal Path State
C1	C2	C3	
1	0	1	J0-J1
1	0	0	J0-J2
0	1	0	J0-J3
0	1	1	J0-J4

TTL Control Voltages &VDD	
Stage	Bias Condition
VDD	+5V (±5%)
Low（0）	0 to 0.8Vdc
High（1）	+5.0Vdc (±5%)

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

泰莱微波 Talent Microwave
Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com


温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	℃
存储温度 Non-operating Temperature	-55		+125	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMSP4T-075110-10	W-Band Reflective FET Switch 75-110 GHz,SP4T,WR-10	Rev.1.0

典型曲线 Typical Performance Data:

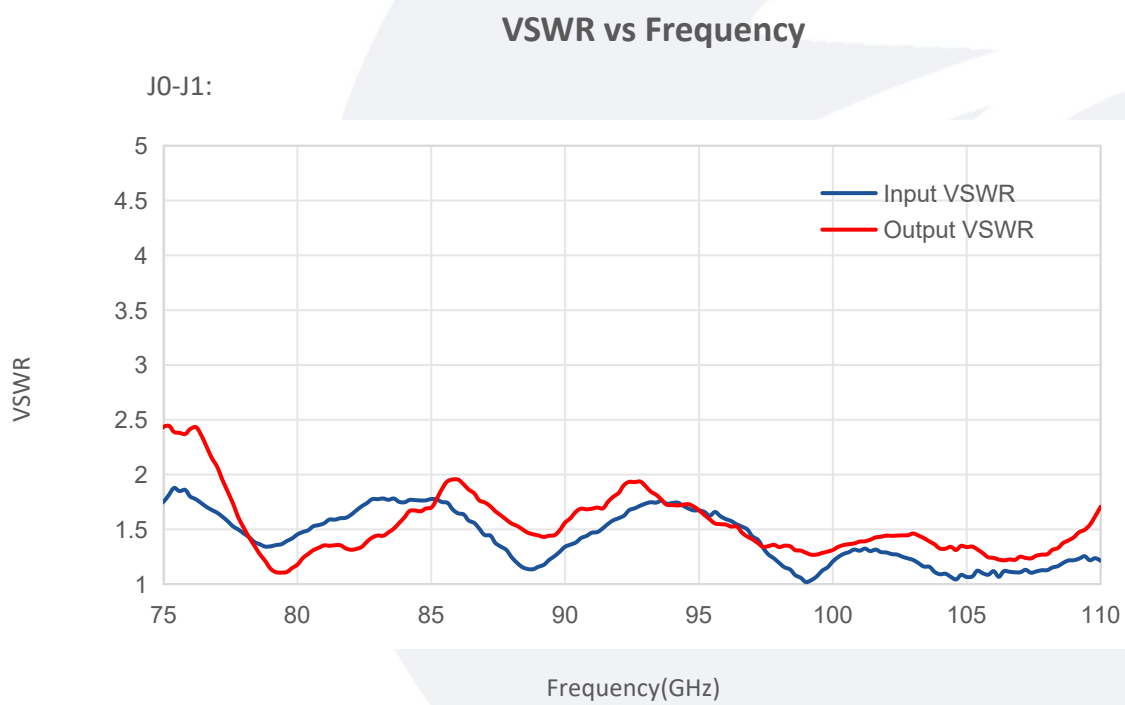


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

Isolation vs Frequency

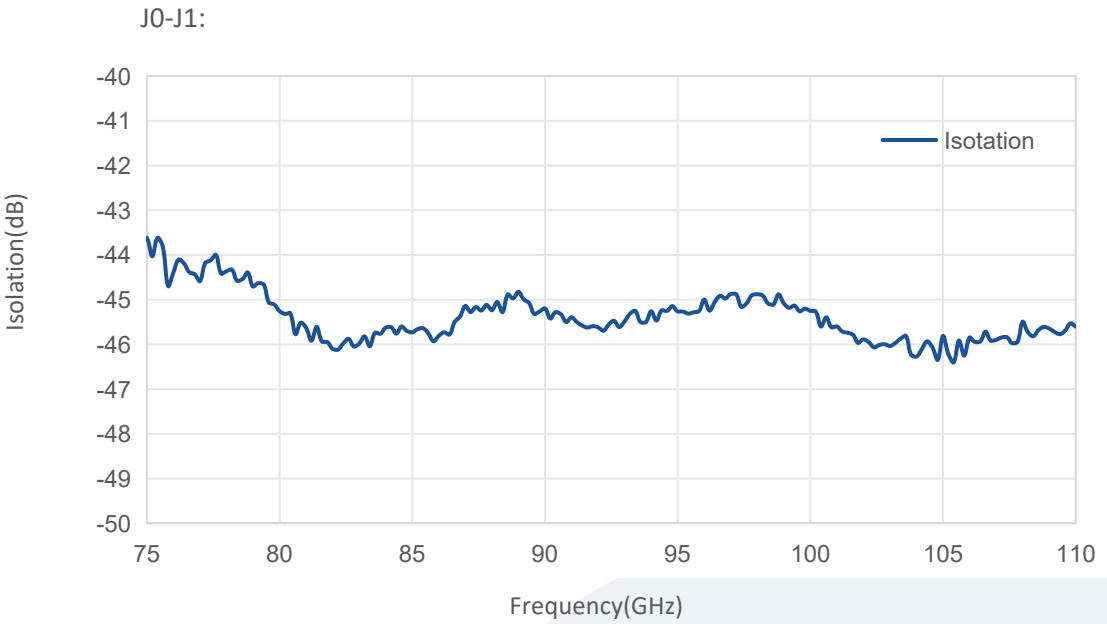

Insertion Loss vs Frequency

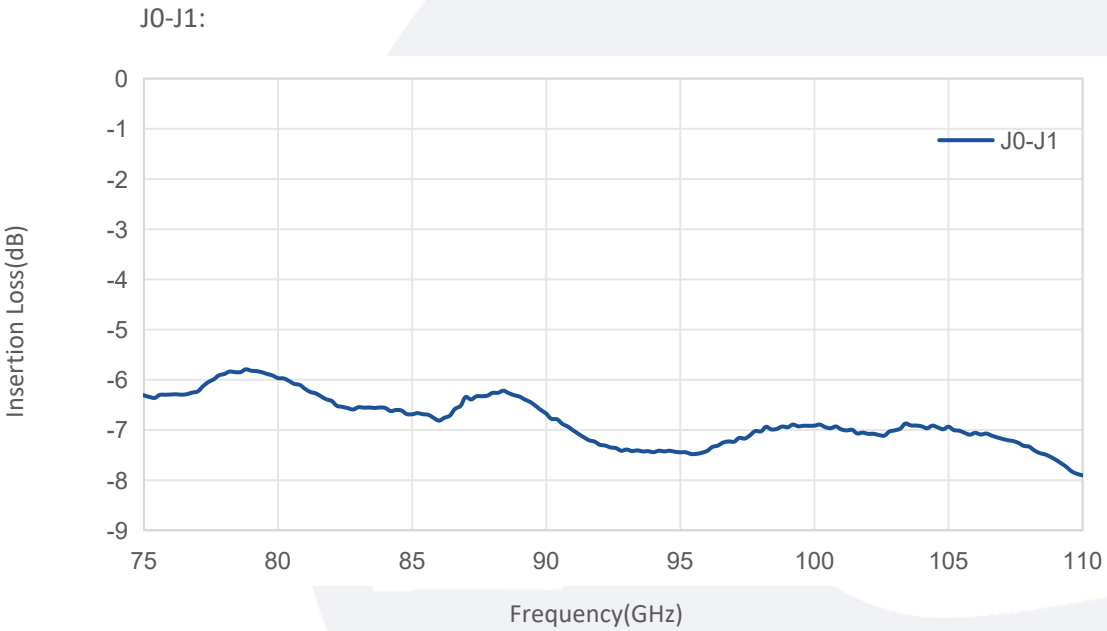


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:


VSWR vs Frequency

J0-J2:

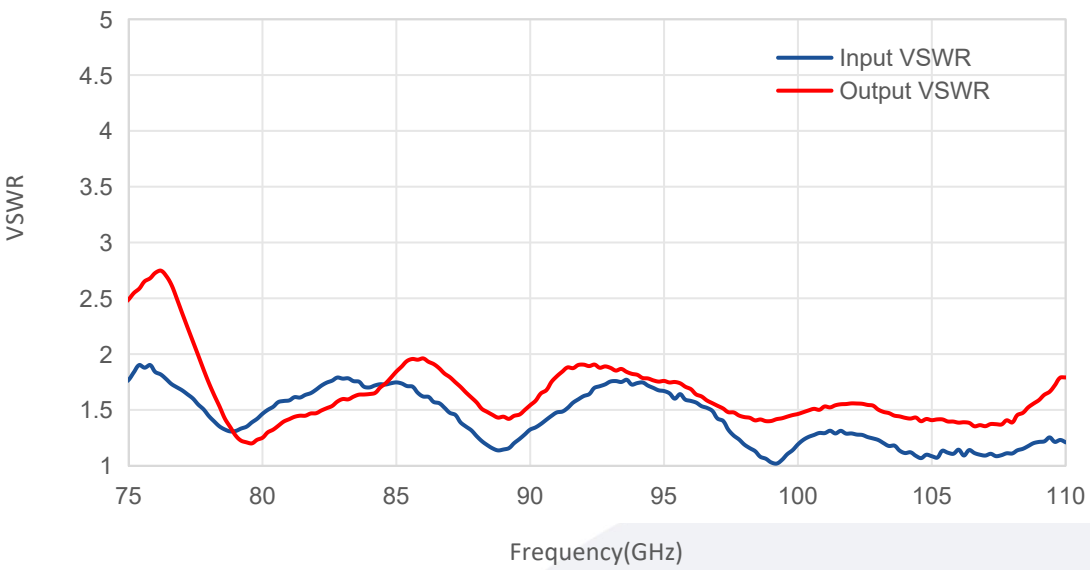

Isolation vs Frequency


J0-J2:

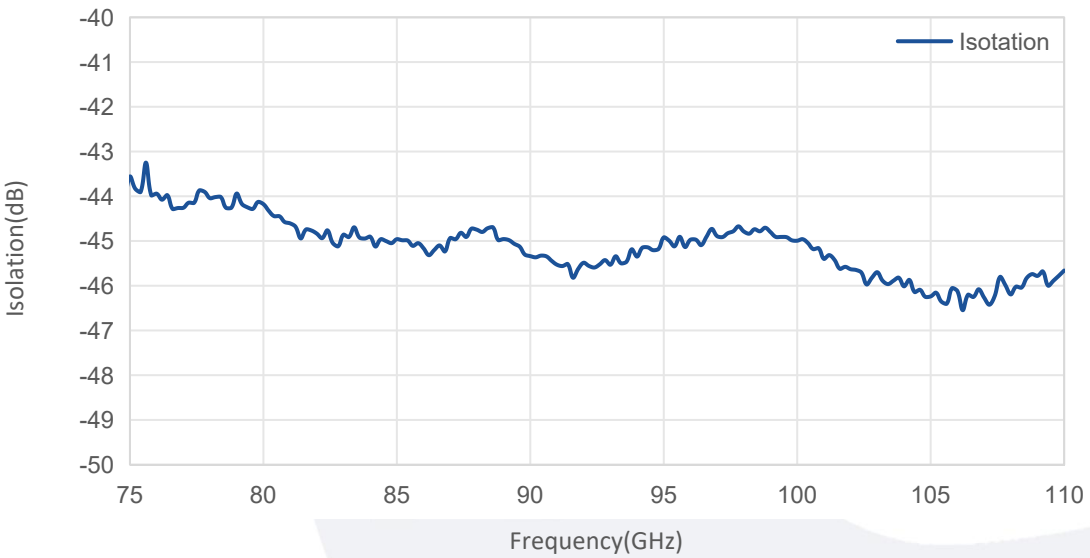


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

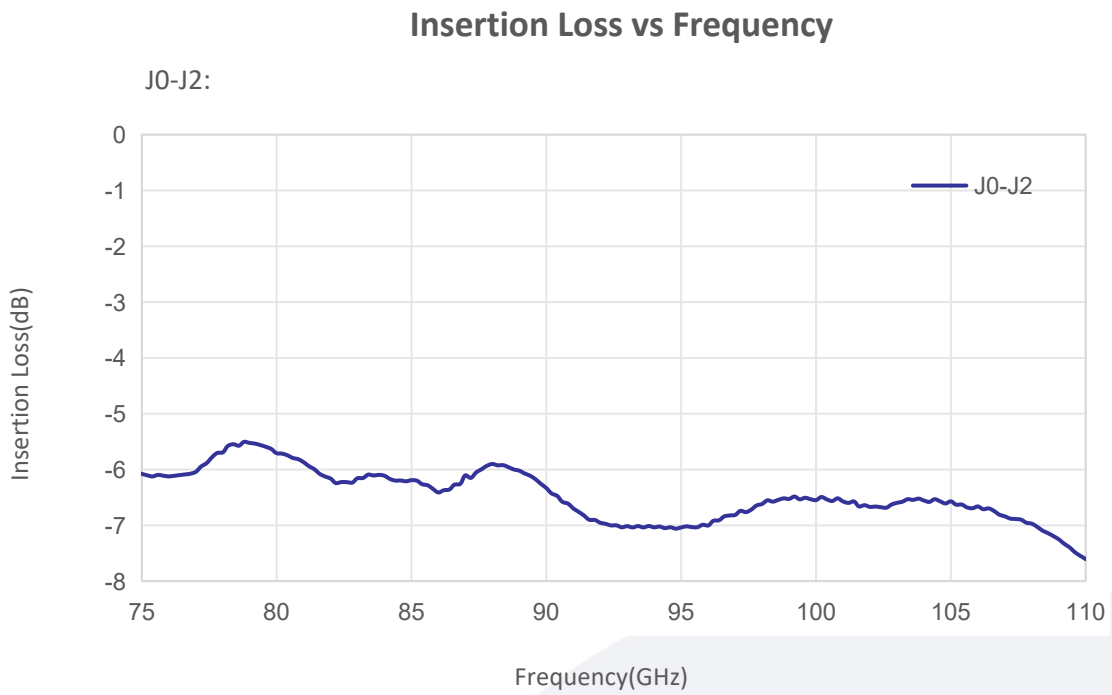

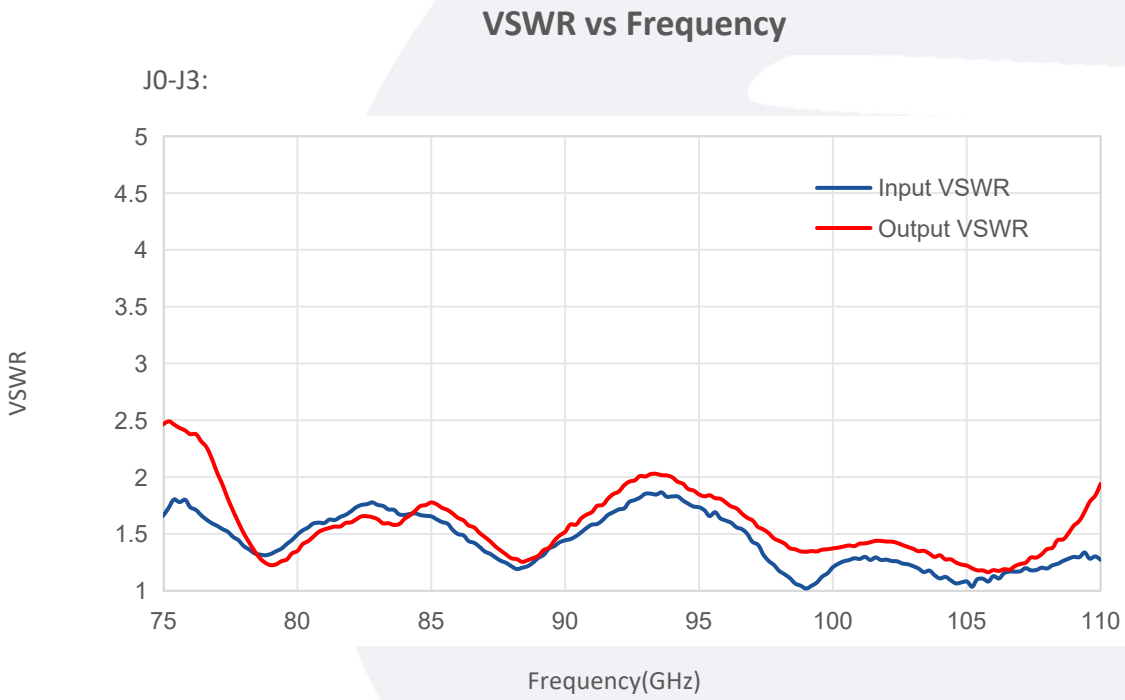


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:


Isolation vs Frequency

J0-J3:

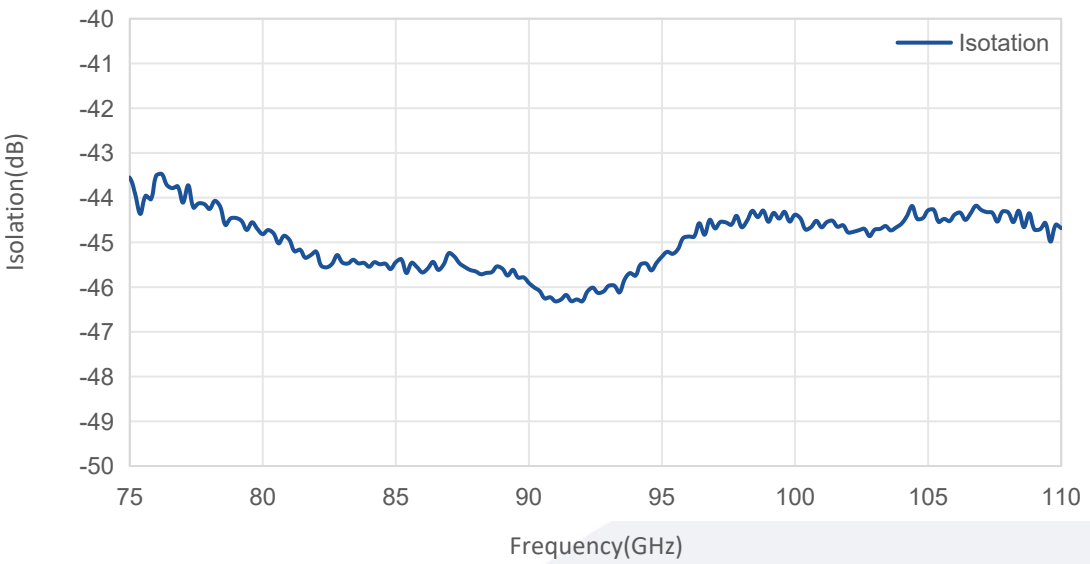

Insertion Loss vs Frequency

J0-J3:

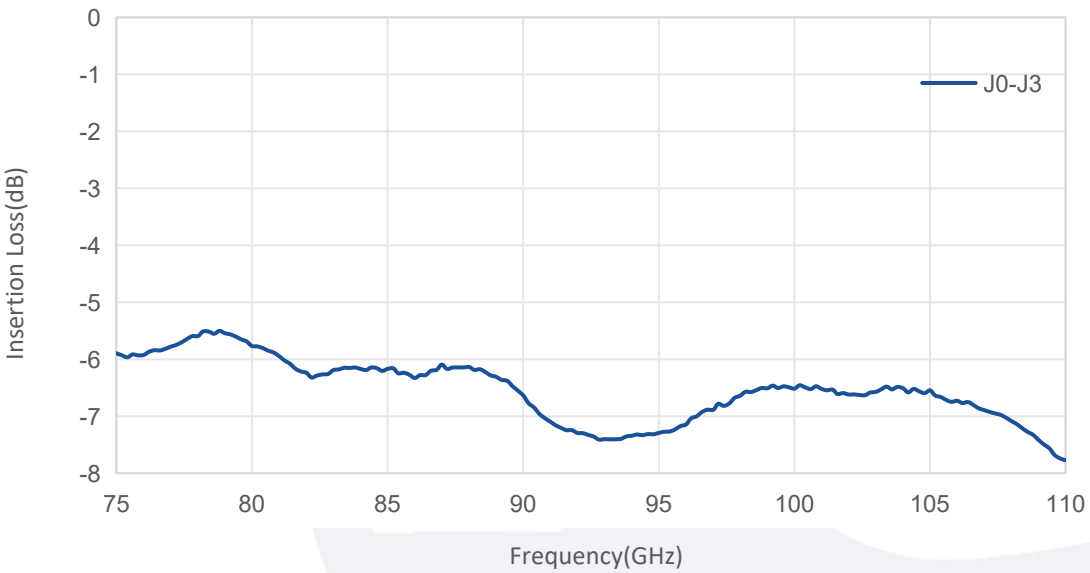


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

VSWR vs Frequency

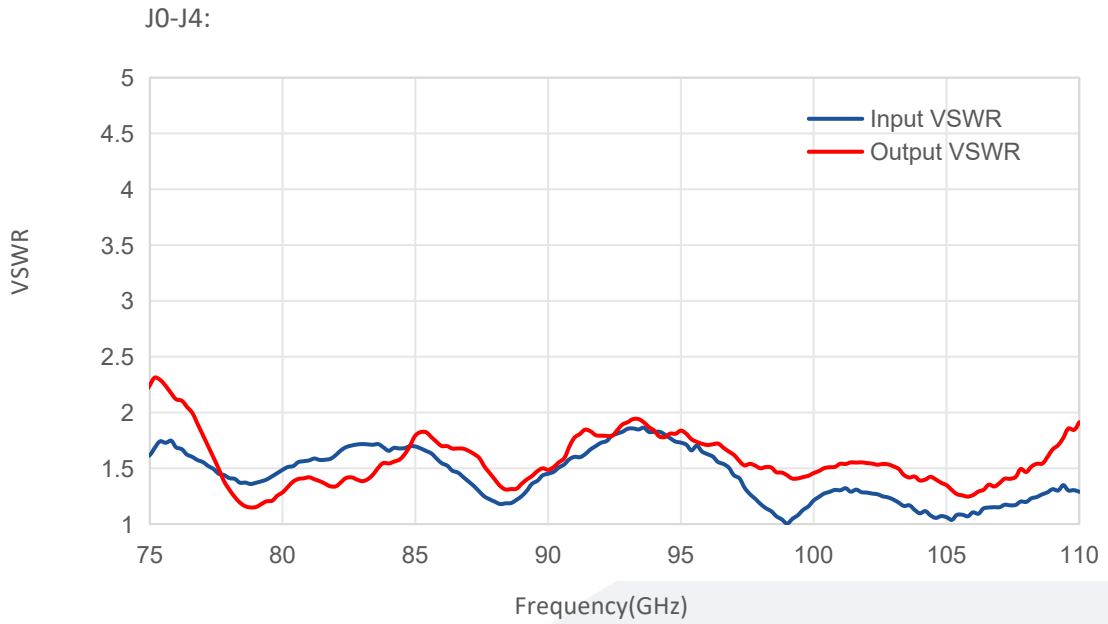


Isolation vs Frequency



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

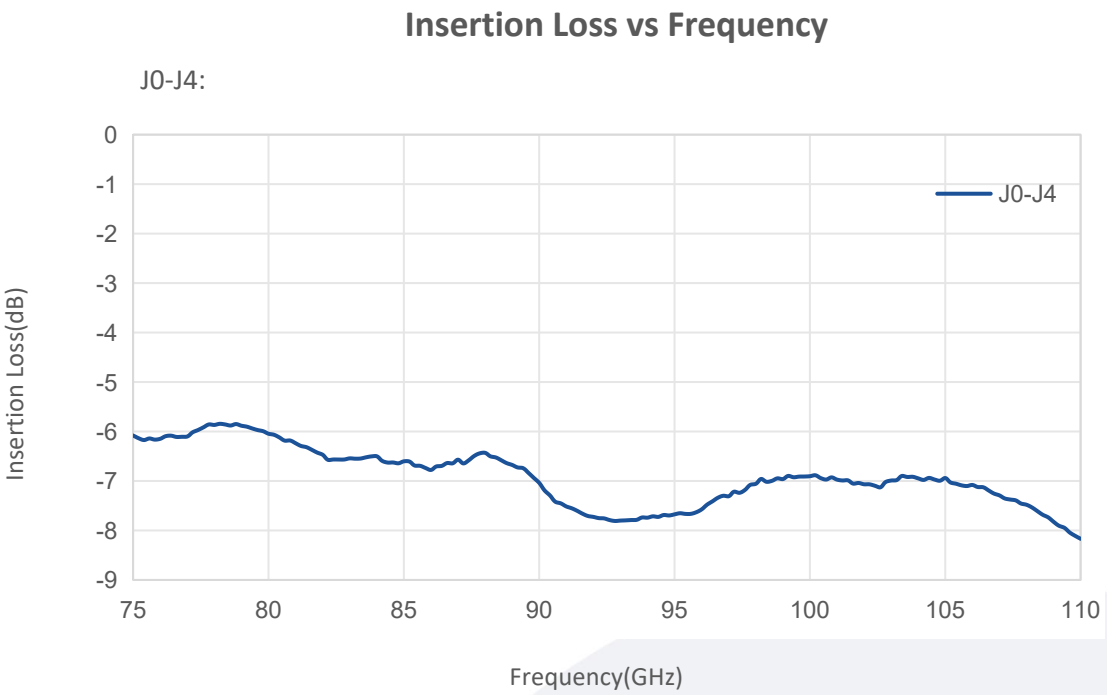

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.