泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Flexible Waveguide Cable

WR12/60-90GHz

Model: FW-WR12WR12-0.2m

FW-WR12WR12-0.2m is a flexible waveguide cable that covers the frequency range of 60 to 90 GHz. The flexible waveguide cable includes two WR-12 waveguide ports with UG-387/U-M anti-cocking flange.

Features:

- Operating Frequency 60 to 90GHz
- VSWR: 1.6:1 Typ
- Insertion loss: 3dB Typ
- Low cost
- Fast delivery time

Applications:

- Test Lab
- Instrumentations
- System setups

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	60		90	GHz
VSWR		1.6		:1
Insertion Loss		3		dB
Power Handling		4 CW		W

Envrionmental And Physical Characteristics:


Parameter	Value	Units
Operating Temerature	+25	℃
Non-operating Temperature	-55~+165	℃
Minimum Bending Radius	25	mm
Waveguide Connector	WR-12/UG-387/U	
Length*	0.2	m


*Note:Length can be customized.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

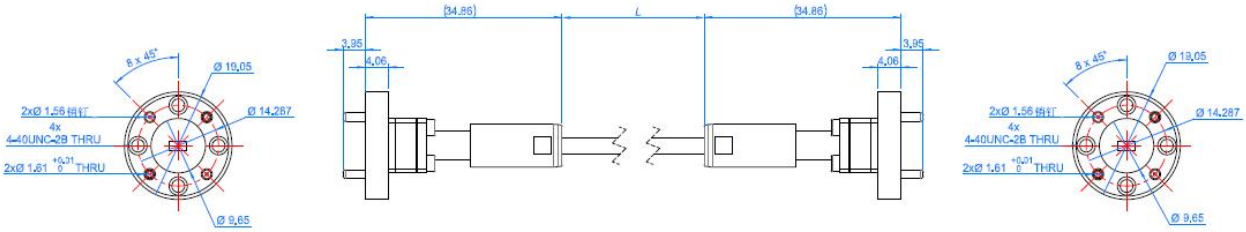

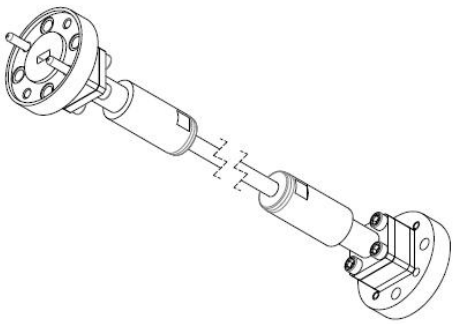

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Ordering Information:


Base Number	Description
FW-WR12WR12-0.2m	Flexible Waveguide Cable, 60-90GHz, WR12

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

Length=0.2m:

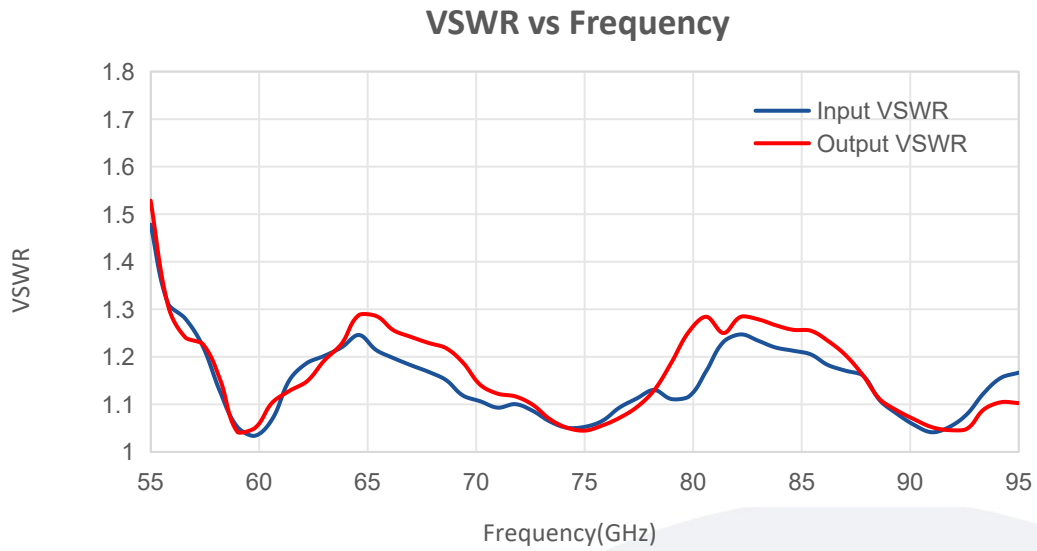

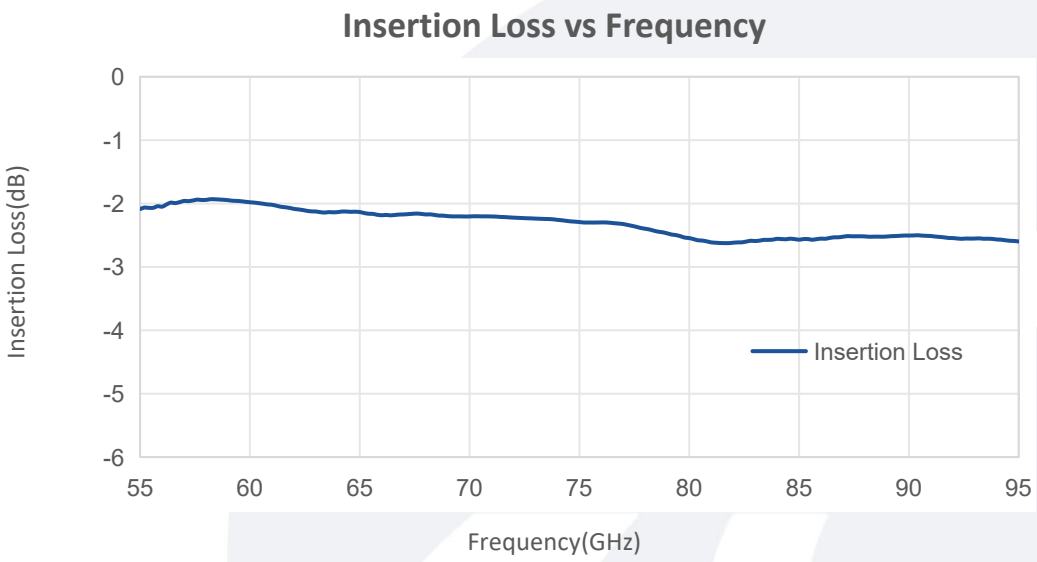

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.