泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coax Directional Coupler

0.5-26.5GHz/10dB Coupling/SMA Female

Model: TC-05265-10S

TC-05265-10S is a coaxial directional coupler that delivers a 10 dB nominal coupling level and 10 dB minimum directivity across the full frequency range from 0.5 to 26.5 GHz. It is a three-port passive device that can couple a portion of the power from the main transmission line to the auxiliary line in a directional manner.

Features:

- Output Frequency: 0.5-26.5GHz
- Coupling: 10dB Typ
- Stackable mechanical design
- Low Insertion Loss
- Moderate Directivity
- 50 Ohm Matched Input / Output

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
工作频率 Frequency Range	0.5		26.5	GHz
插入损耗 Insertion Loss (不含耦合插损 Excl Coupling)		1.8	2.8	dB
耦合度 Coupling		10±1.6		dB
方向性 Directivity	10	12		dB
耐功率 Power Handling			30	W
驻波 VSWR			1.7	:1
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input/Output Connector	SMA Female/SMA Female	
尺寸 Size	154.5*11.5*11	mm

泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

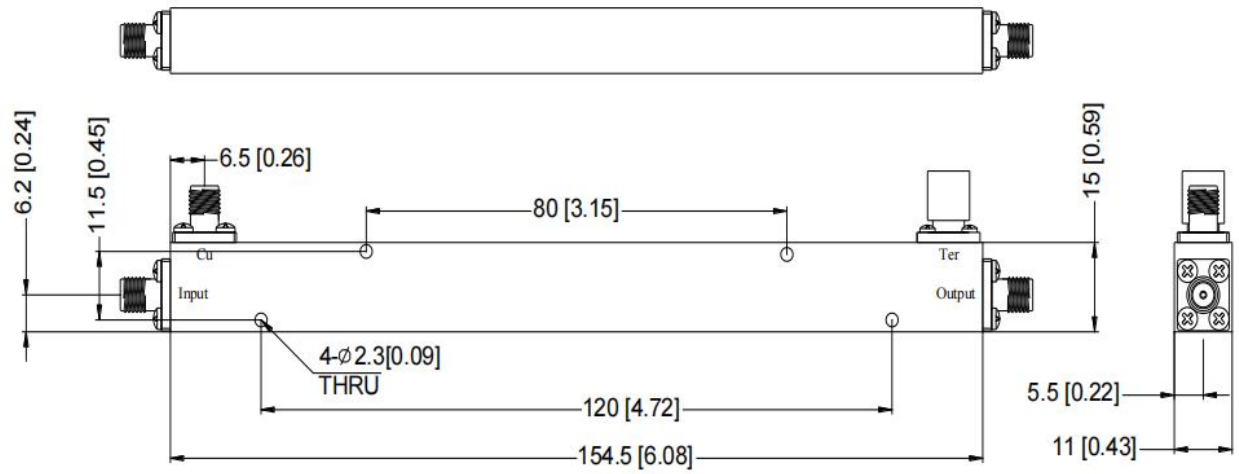

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
温度范围 Temperature Range	-45		+85	℃
相对湿度 Relative humidity	100% RH at 35c, 95%RH at 40℃			%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TC-05265-10S	Coaxial Directional Coupler 0.5-26.5GHz, Coulping:10dB, SMA Female	Rev.1.0

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

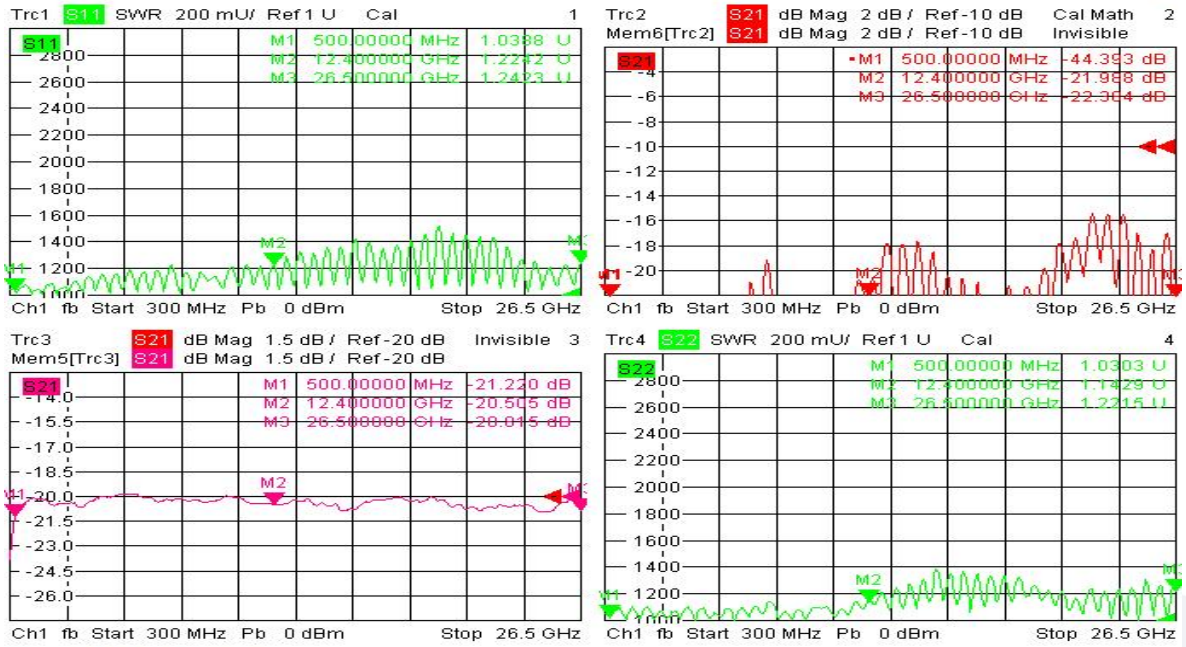

11/12/2018, 8:19 PM

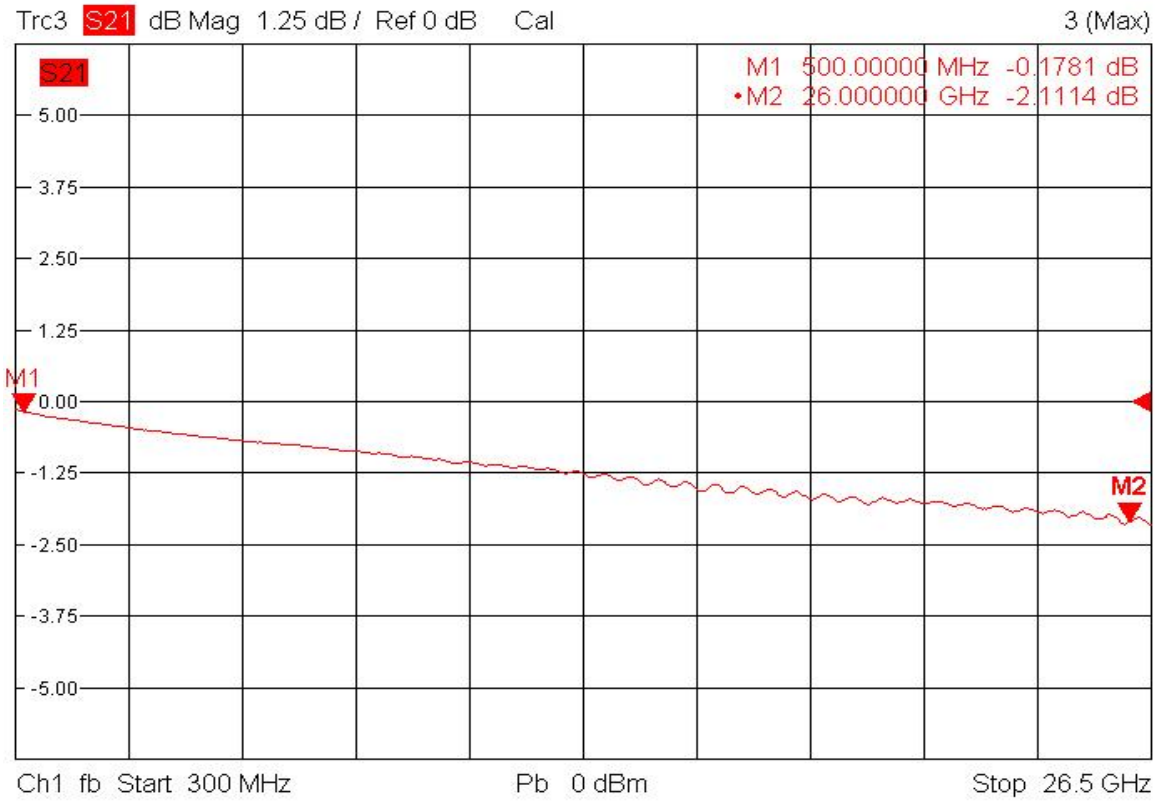

11/12/2018, 12:30 PM

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.