泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coax Directional Coupler

0.698-2.7GHz/3dB Coupling/N Femal　　Model: TC-06987200-3N-200W(2进1出）

TC-06982700-3N-200W(2进1出) is a coaxial directional coupler that delivers a 3 dB nominal coupling across the full frequency range from 0.698 to 2.7 GHz. It is a three-port passive device that can couple a portion of the power from the main transmission line to the auxiliary line in a directional manner.

Features:

- Output Frequency: 0.698-2.7GHz
- Coupling: 3dB Typ
- Stackable mechanical design
- Low Insertion Loss
- Moderate Directivity
- 50 Ohm Matched Input / Output

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
工作频率 Frequency Range	0.698		2.7	GHz
插入损耗 Insertion Loss (不含耦合插损 Excl Coupling)			0.8	dB
耦合度 Coupling		3		dB
隔离度 Isolation	23			dB
幅度平衡 Amplitude Balance			±0.8	dB
耐功率 Power Handling			200(2inX100W)	W
驻波 VSWR			1.3	:1
阻抗 Impedance		50		Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input/Output Connector	N Female/N Female	
尺寸 Size	142*80*44.5	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

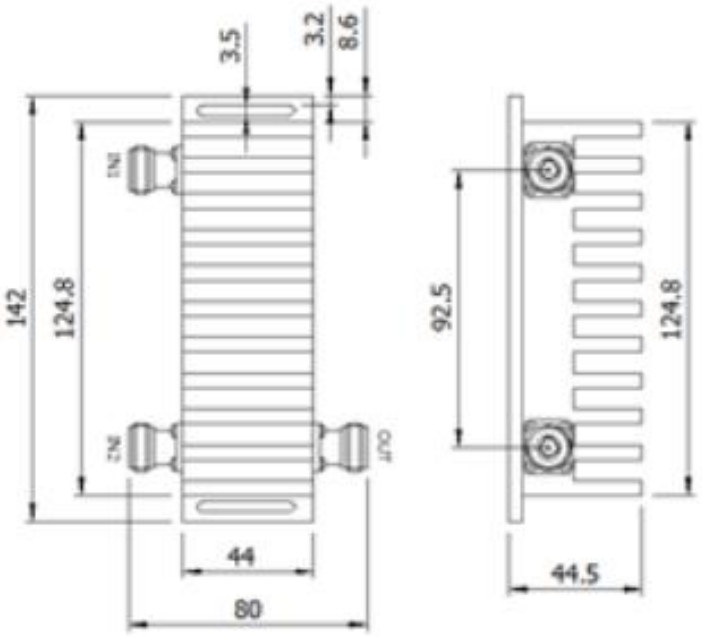

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
温度范围 Temperature Range	-40		+80	℃
相对湿度 Relative humidity	100% RH at 35c, 95%RH at 40℃			%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TC-06982700-3N-200W(2进1出)	Coaxial Directional Coupler 0.698-2.7GHz, Coulping:3dB, N Female	Rev.1.0