Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Straight Waveguide

WR-3.4/220-330GHz

Model: TL-3.4SWG-1inch

TL-3.4SWG-1inch is a 1” long, J-band straight waveguide section with a WR-3.4 waveguide and UG-387/U anti-cocking flanges. The waveguide is offered to cover the frequency range of 220 to 330 GHz.

Features:

- Operating Frequency 220 to 330 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

Applications:

- Test Instrumentation
- Instrumentations
- Lab Use

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	220		330	GHz
Insertion Loss		1.8		dB
Return Loss		-20		dB


Envrionmental And Physical Characteristics:


Parameter	Value	Units
Material	Brass	
Finish	Gold plated	
Connectors	WR-3.4/UG-387/U	
Length	1	Inch

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

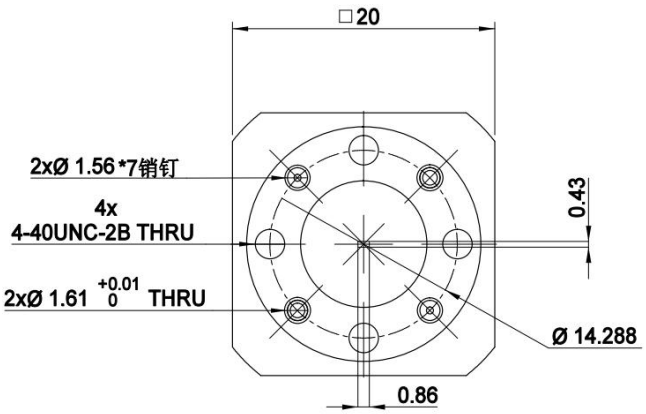

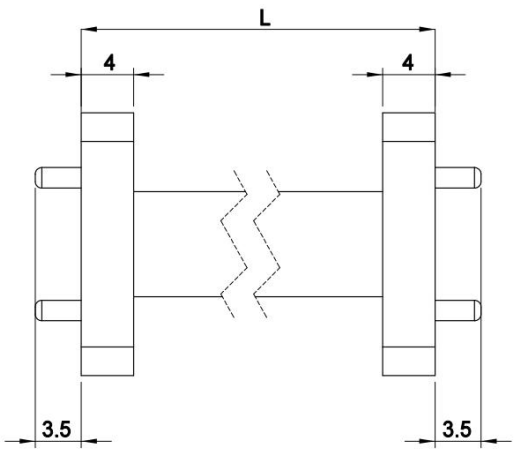



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description
TL-3.4SWG-1inch	220-330GHz, Straight Waveguide, Insertion Loss: 1.8dB Typ; WR-3.4