Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Straight Waveguide

WR-4.3/170-260GHz

Model: TL-4.3SWG-2inch

TL-4.3SWG-2inch is a 2” long, Y-band straight waveguide section with a WR-4.3 waveguide and UG-387/U anti-cocking flanges. The waveguide is offered to cover the frequency range of 170 to 260 GHz.

Features:

- Operating Frequency 170 to 260 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

Applications:

- Test Instrumentation
- Instrumentations
- Lab Use

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	170		260	GHz
Insertion Loss		3.2		dB
Return Loss		-20		dB


Envrionmental And Physical Characteristics:


Parameter	Value	Units
Material	Brass	
Finish	Gold plated	
Connectors	WR-4.3/UG-387/U	
Length	2	Inch

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

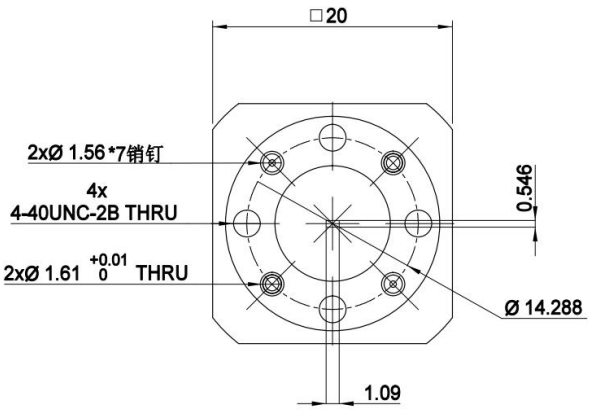

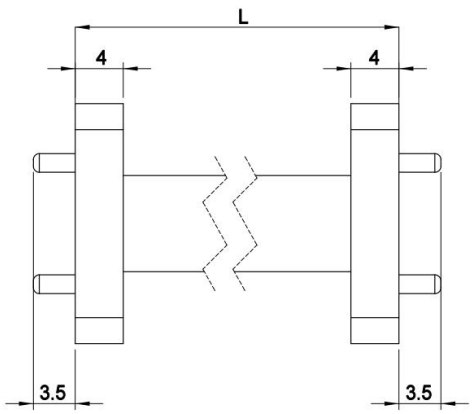



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description
TL-4.3SWG-2inch	170-260GHz, Straight Waveguide, Insertion Loss: 3.2dB Typ; WR-4.3