泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Power Amplifier

WR-19/40-60GHz/30dB Gain/36dBm Psat Model: TMPA-040060-3036-19

TMPA-040060-3036-19 is a power amplifier with a typical small signal gain of 30 dB and a nominal Psat of 36 dBm across the frequency range of 40 to 60 GHz. The DC power requirement for the amplifier is +19 VDC/1.5 A. The input and output port configuration offers an inline structure with WR-19 waveguides and UG-383/U-M anticocking flanges.

Features:

- Frequency range: 40-60GHz
- Gain: 30dB Typ
- Output Power Psat: 36dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	40		60	GHz
小信号增益 Small Signal Gain		30		dB
饱和输出功率 Output Psat		36		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		19		V DC
直流电流 DC Supply Current		1.5		A

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	WR-19/UG-383/U	
直流供电接口 DC Supply Connector	J30J-9ZKP	Pin1~4: +19V Pin5~9: GND
尺寸 Size	90*50*31	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+24 V
输入功率 RF Input Power	+19 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

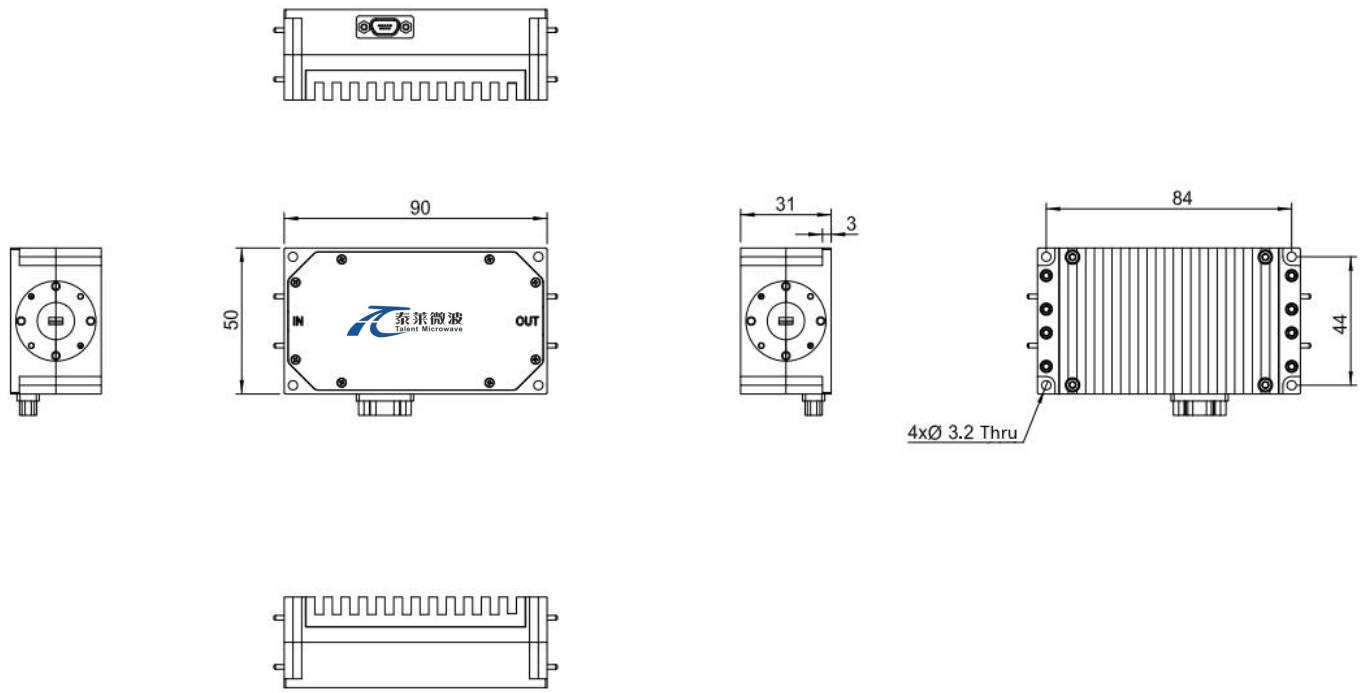

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMPA-040060-3036-19	Power Amplifier, 40-60GHz, Gain: 30dB Type, Psat: 36dBm Type, +19V DC,WR-19, Without heasink	Rev.1.1
TMPA-040060-3036-19-HS	Power Amplifier, 40-60GHz, Gain: 30dB Type, Psat: 36dBm Type, +19V DC,WR-19, With heatsink	Rev.1.1

典型曲线 Typical Performance Data:

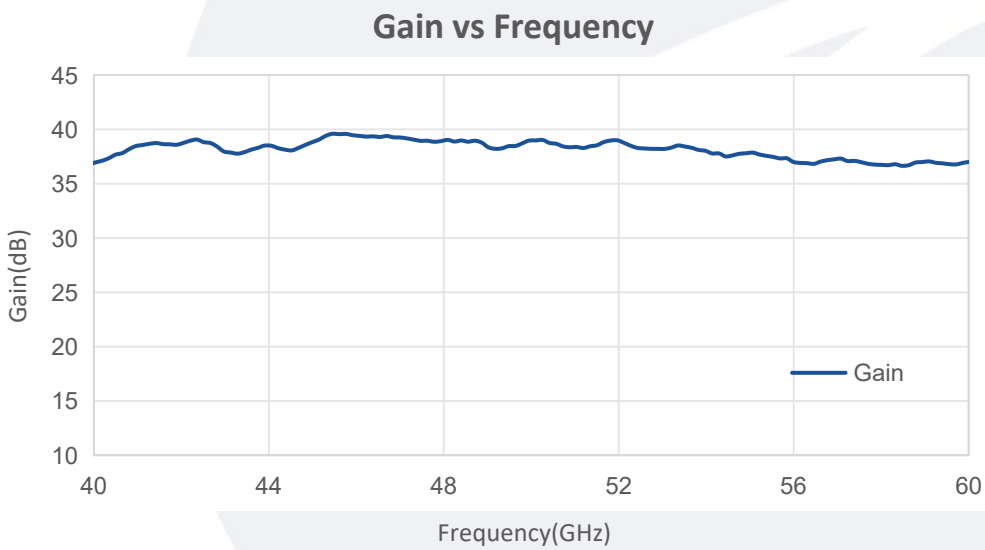

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

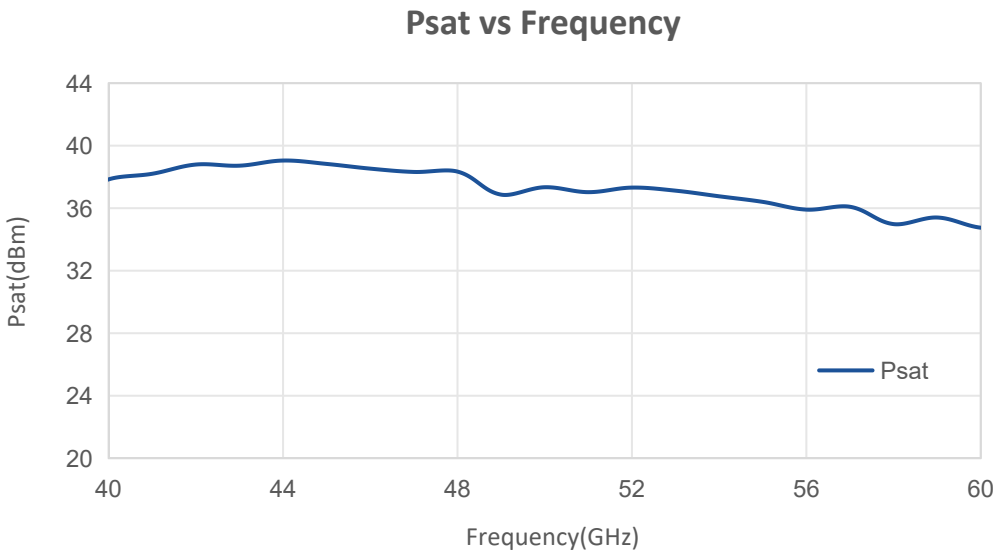

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.