Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

# Equalizer

## 0.01-40GHz/8.6dB, Slope

## Model: TLME-0.01G40G-10

The TLME-0.01G40G-10 is an equalizer. It is a positive gain slope equalizer designed to pass 0.01 to 40 GHz. Equalization can be applied to reduce low pass filtering effects in both RF/microwave and high speed digital systems.

## Features:

- Frequency range: 0.01-40 GHz
- Good gain equalization
- Small Size and simple to use
- Excellent return loss

## Applications:

- Cable or Waveguide Loss Compensation
- Amplifier Flatness Compensation
- Microwave Radio
- RF Transceivers
- Telecom Infrastructure

## Electrical Characteristics:

| Parameter | | Min | Typ | Max | Units |
|---|---|---|---|---|---|
| Frequency range | | 0.01 | | 40 | GHz |
| Insertion Loss | @0.01GHz | | 10 | | dB |
| | @40GHz | | 1.4 | | |
| Return Loss | | | -15 | | dB |
| Power Handling | | | 30 | | dBm |
| Impedance | | | 50 | | Ohms |


## Mechanical Specifications:

| Parameter | Value | Units |
|---|---|---|
| Input /Output Connector | 2.92mm | |
| Length | 42.2 | mm |


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

## Outline Drawing:


Unit:mm; Tolerance:±0.1mm

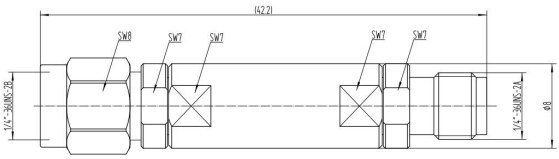


TLME-0.01G40G-10

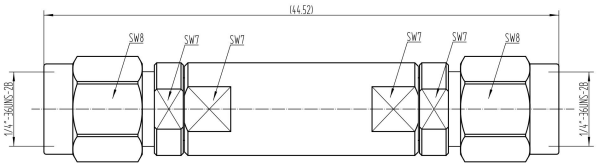


TLME-0.01G40G-10-MM

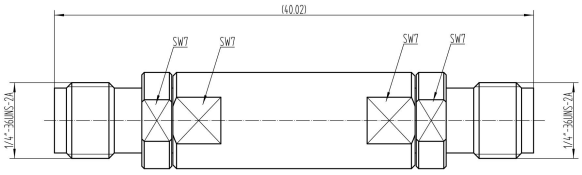


TLME-0.01G40G-10-FF



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## Environmental Conditions:


| Parameter | Min | Typ | Max | Units |
|---|---|---|---|---|
| Operating Temperature | -40 | | +70 | ℃ |
| Non-operating Temperature | -55 | | +85 | ℃ |
| Relative humidity | | 95 | | % |
| Altitude | 10,000 | | | feet |
| Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |


## Ordering Information:

| Base Number | Description | Revision |
|---|---|---|
| TLME-0.01G40G-10 | Equalizer, 0.01-40GHz,<br>Insertion loss: 10dB@0.01GHz; 1.4dB@40GHz;<br>2.92mm Male/2.92mm Female | Rev.1.1 |
| TLME-0.01G40G-10-MM | Equalizer, 0.01-40GHz,<br>Insertion loss: 10dB@0.01GHz; 1.4dB@40GHz;<br>2.92mm Male/2.92mm Male | Rev.1.1 |
| TLME-0.01G40G-10-FF | Equalizer, 0.01-40GHz,<br>Insertion loss: 10dB@0.01GHz; 1.4dB@40GHz;<br>2.92mm Female/2.92mm Female | Rev.1.1 |

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

## Typical Performance Data:

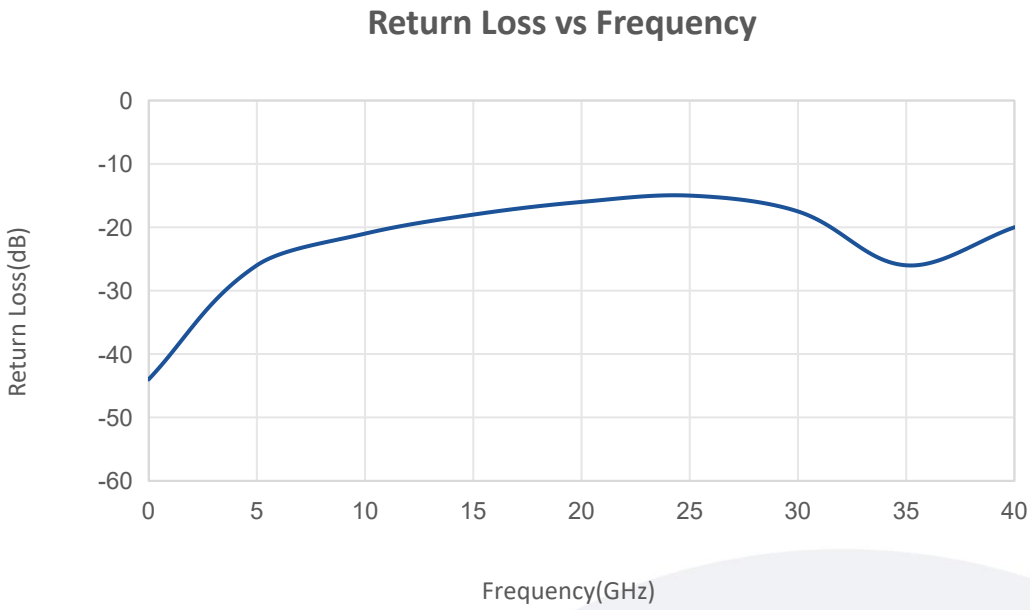

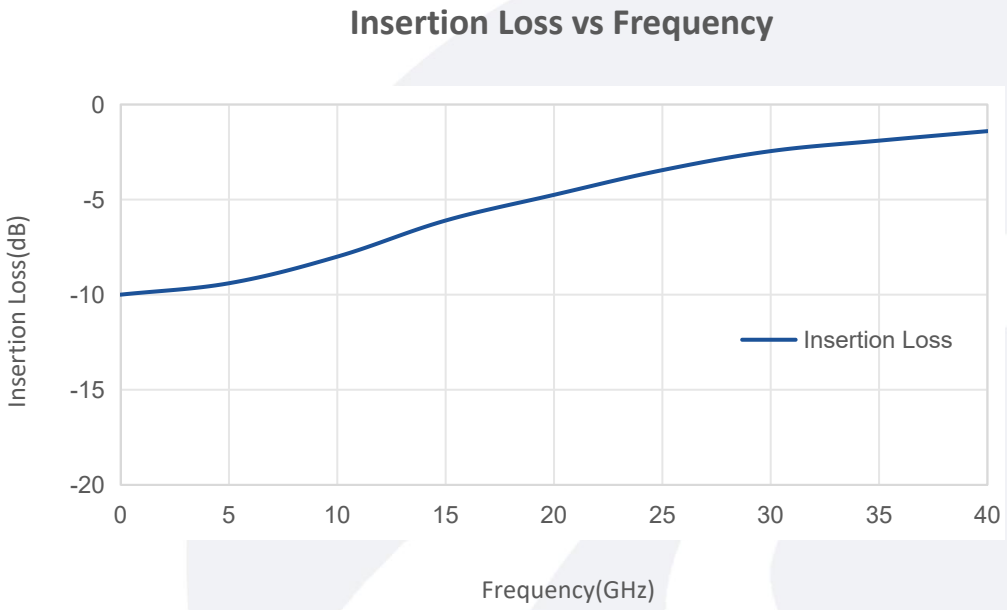
Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.