Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Equalizer

6-18GHz/9dB, Slope

Model: TLME-6G18G-09

The TLME-6G18G-09 is an equalizer. It is a positive gain slope equalizer designed to pass 6 to 18 GHz. Equalization can be applied to reduce low pass filtering effects in both RF/microwave and high speed digital systems.

Features:

- Frequency range: 6-18 GHz
- Good gain equalization
- 2.92mmll Size and simple to use
- Excellent return loss

Applications:

- Cable or Waveguide Loss Compensation
- Amplifier Flatness Compensation
- Microwave Radio
- RF Transceivers
- Telecom Infrastructure

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Frequency range		6		18	GHz
Insertion Loss	@6GHz		10.5		dB
	@18GHz		1.5		
Return Loss			-15		dB
Power Handling			30		dBm
Impedance			50		Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92mm	
Length	42.2	mm

泰莱微波
Talent Microwave


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:


Unit:mm; Tolerance:±0.1mm

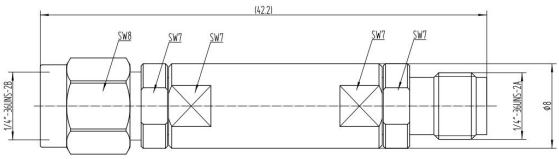

TLME-6G18G-09

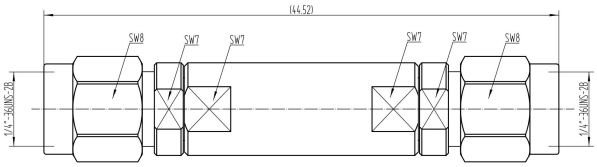

TLME-6G18G-09-MM

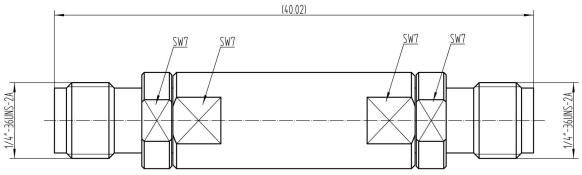

TLME-6G18G-09-FF



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-40		+70	℃
Non-operating Temperature	-55		+85	℃
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLME-6G18G-09	Equalizer, 6-18GHz, Insertion loss: 10.5dB@6GHz; 1.5dB@18GHz; 2.92mm Male/2.92mm Female	Rev.1.0
TLME-6G18G-09-MM	Equalizer, 6-18GHz, Insertion loss: 10.5dB@6GHz; 1.5dB@18GHz; 2.92mm Male/2.92mm Male	Rev.1.0
TLME-6G18G-09-FF	Equalizer, 6-18GHz, Insertion loss: 10.5dB@6GHz; 1.5dB@18GHz; 2.92mm Female/2.92mm Female	Rev.1.0