泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coax Directional Coupler

1-20GHz/15dB Coupling/SMA Female

Model: TC-10200-15S

TC-10200-15S is a coaxial directional coupler that delivers a 15 dB nominal coupling level and 10 dB minimum directivity across the full frequency range from 1 to 20 GHz. It is a three-port passive device that can couple a portion of the power from the main transmission line to the auxiliary line in a directional manner.

Features:

- Output Frequency: 1-20GHz
- Coupling: 15dB Typ
- Stackable mechanical design
- Low Insertion Loss
- Moderate Directivity
- 50 Ohm Matched Input / Output

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	1		20	GHz
Insertion Loss (Excl Coupling)		1.4	1.5	dB
Coupling		15±1		dB
Directivity	10	12		dB
Power Handling			50	W
VSWR			1.65	:1
Impedance		50		Ohms


Mechanical Specifications:

Parameter	Value	Units
Operating Temperature	-55-+85	℃
Input/Output Connector	SMA Female/SMA Female	
Size	84*15*11	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm

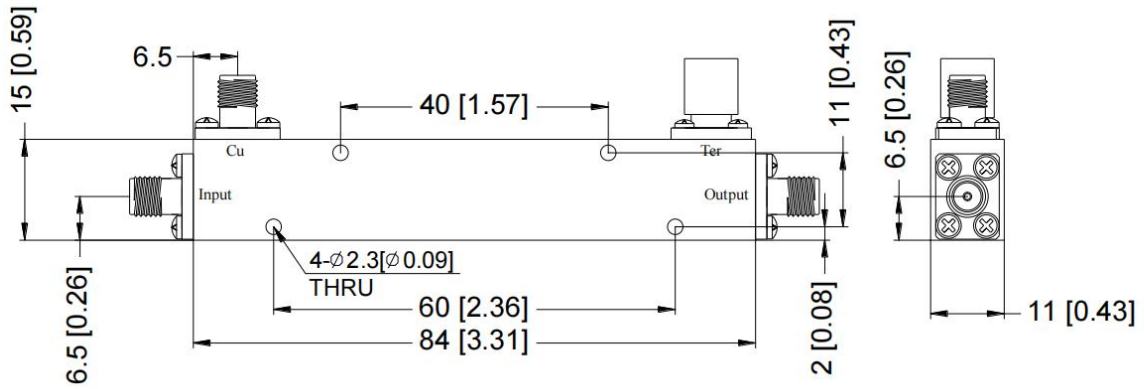

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Ordering Information:


Base Number	Description	Revision
TC-10200-15S	Coaxial Directional Coupler 1-20GHz, Coulping:15dB, SMA Female	Rev.1.0


泰莱微波
Talent Microwave


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

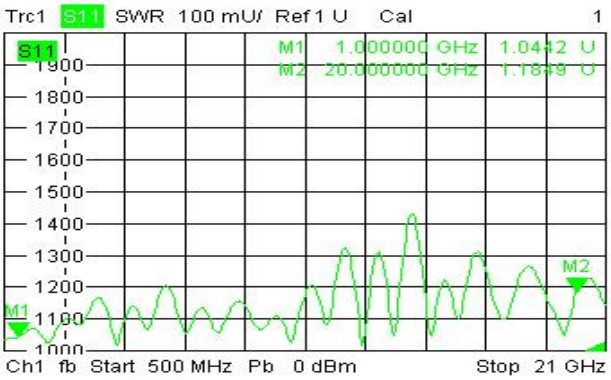

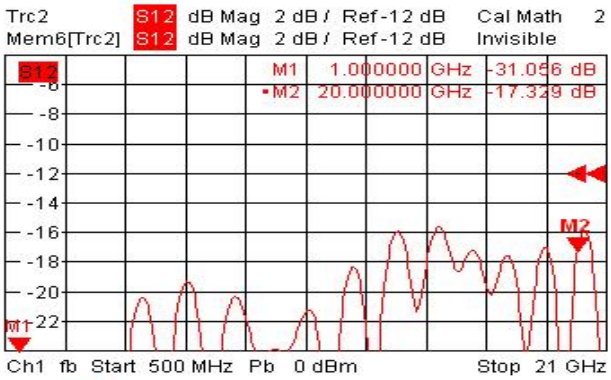

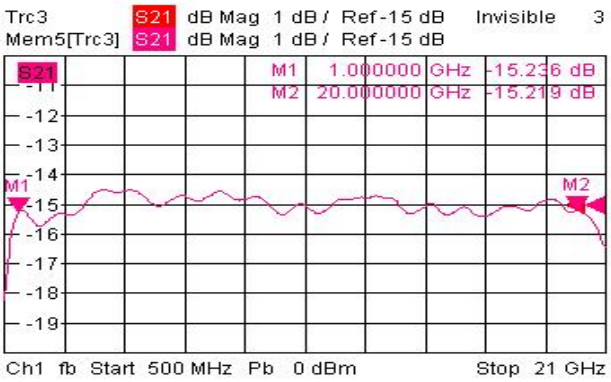

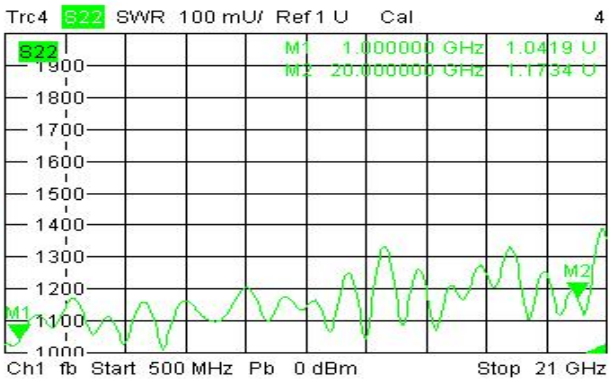



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.