泰莱微波 Talent Microwave
Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coax Directional Coupler

6-18GHz/6dB Coupling/SMA Female Model: TC-60180-6S

TC-60180-6S is a coaxial directional coupler that delivers a 6 dB nominal coupling level and 12 dB minimum directivity across the full frequency range from 6 to 18 GHz. It is a three-port passive device that can couple a portion of the power from the main transmission line to the auxiliary line in a directional manner.

Features:

- Output Frequency:6-18GHz
- Coupling: 6dB Typ
- Stackable mechanical design
- Low Insertion Loss
- Moderate Directivity
- 50 Ohm Matched Input / Output

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
工作频率 Frequency Range		6		18	GHz
插入损耗 Insertion Loss (不含耦合插损 Excl Coupling)				2.5	dB
耦合度 Coupling			6±1		dB
方向性 Directivity	@6-15GHz	12			dB
	@15-18GHz	10			dB
耐功率 Power Handling				30	W
驻波 VSWR	@6-15GHz			1.5	:1
	@15-18GHz			1.8	:1
阻抗 Impedance			50		Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
操作温度 Operating Temperature	-55-+85	℃
输入/输出接口 Input/Output Connector	SMA Female/SMA Female	
尺寸 Size	44*15*14	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

外形图 Outline Drawing:

Unit:mm

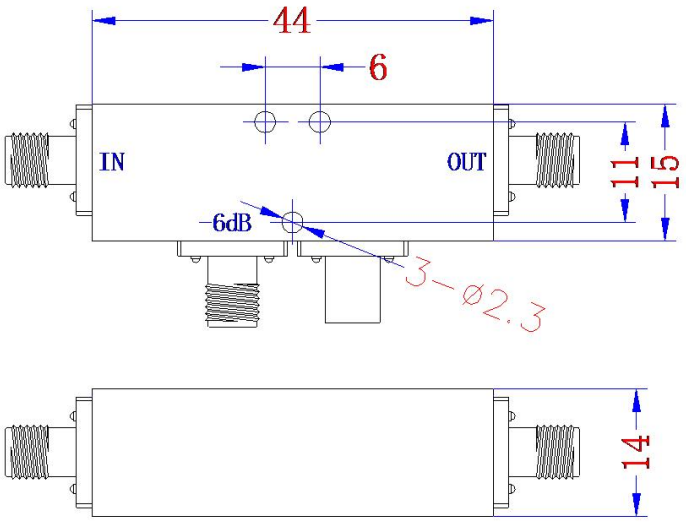

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TC-60180-6S	Coaxial Directional Coupler 6-18GHz, Coulping:6dB, SMA Female	Rev.1.0