Triple Junction Isolator

MM-CICICI-040120-Cryo

4-12 GHz

General Description:

MM-CICICI-040120-Cryo are ultra-low insertion loss cryogenic isolators and circulators operating in the 4-12 GHz frequency range. They have been designed from ground up to meet the strict requirements of ultra_x0002_low temperature physics research. The OFHC copper body ensures minimum loss and that this loss reaches the lowest possible temperature to minimize thermal noise.

Features:

- Broad Bandwidth
- High Isolation
- Low Insertion Loss; Low VSWR

Applications:

- quantum computing

Electrical Specifications :

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	4		12	GHz
Insertion Loss		0.85		dB
Return loss		-16		:1
Isolation		48		dB
Impedance		50		Ω

Mechanical Specifications:

Parameter	Value
Size	69.9x25.5x14.7 mm
Weight	225g
Material / Finishing	Nickel plated
RF Connector	SMA-K


Triple Junction Isolator

MM-CICICI-040120-Cryo

4-12 GHz

Outline Drawing:

mm

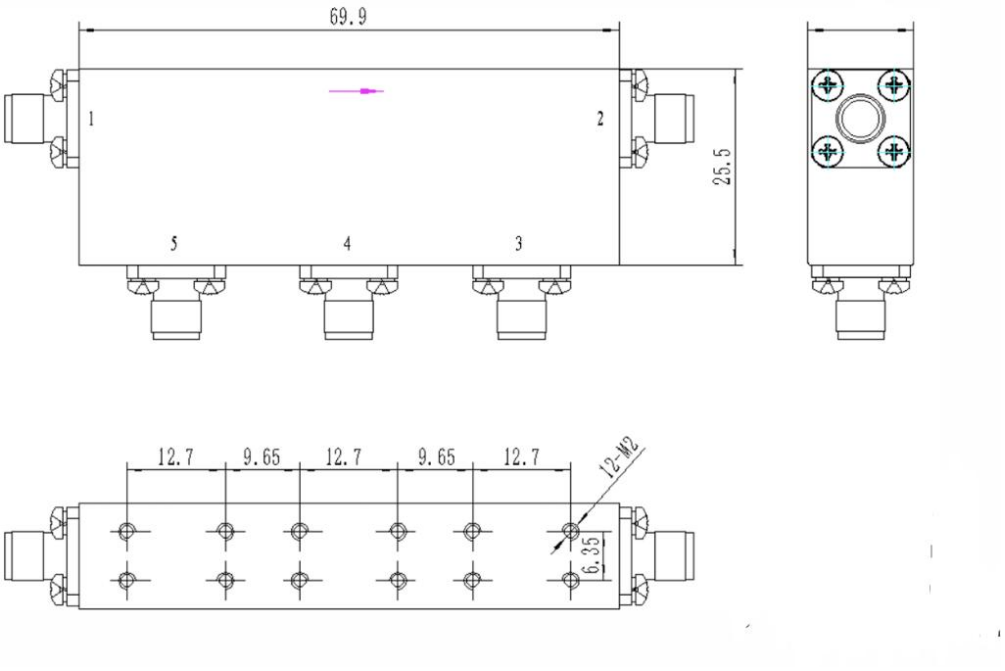


Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		10mK-100K
Storage Temperature		-55℃~+85℃
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40℃
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet


Please note, all information contained in this data sheet is subject to change without notice. ver 1.0 0618

Typical Performance Data(TEM=77K):

Port1 to Port2:

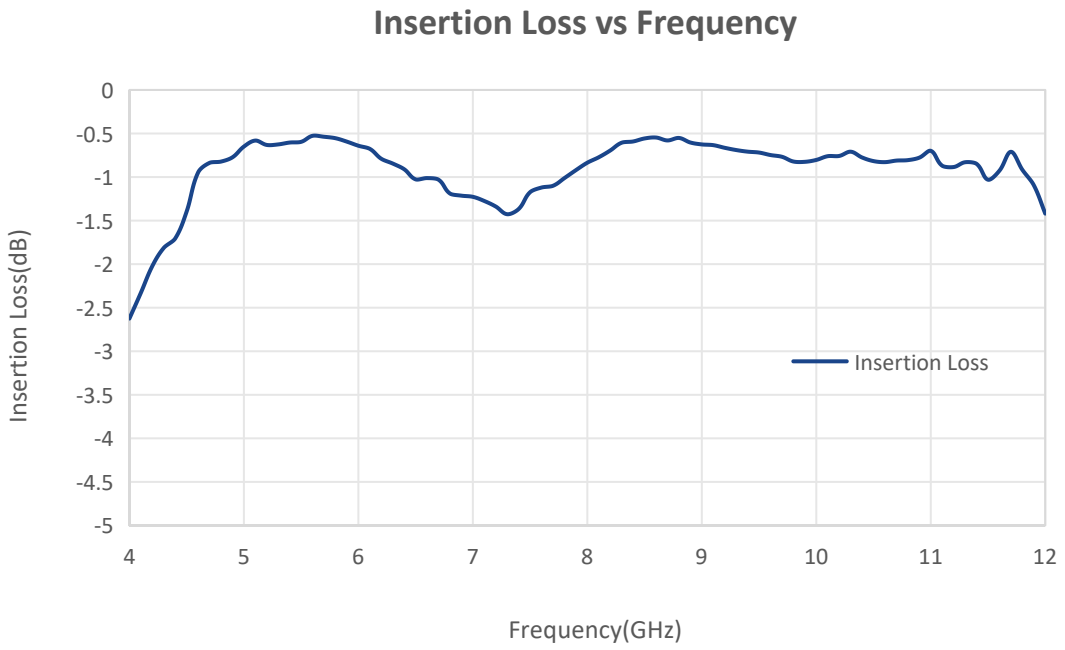


Port2 to Port3:

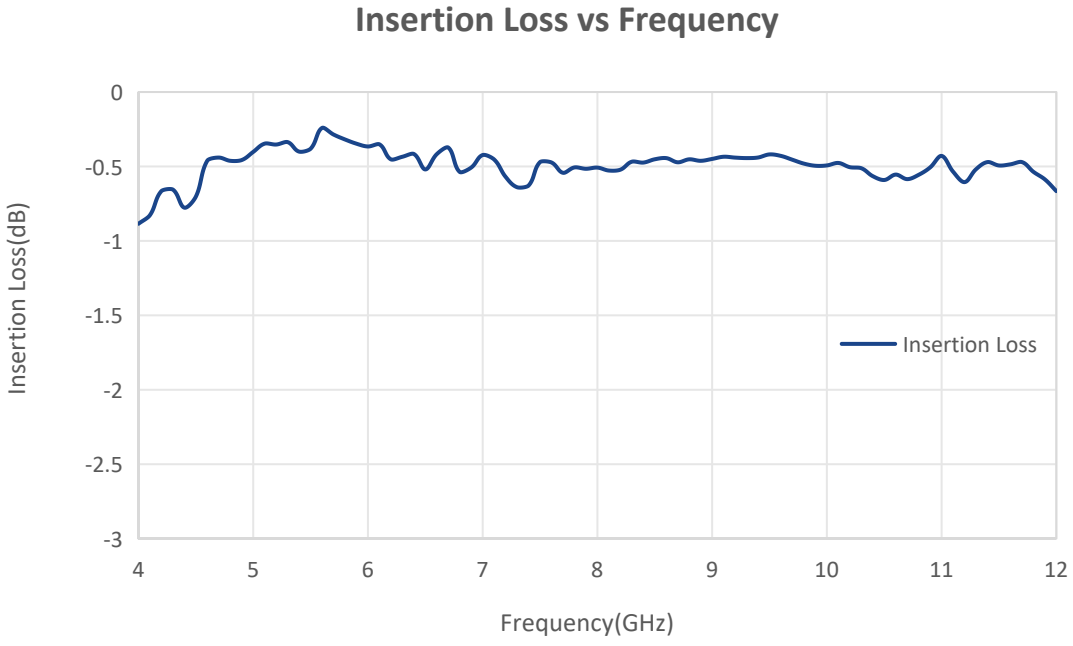


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data(TEM=77K):

Port3 to Port4:

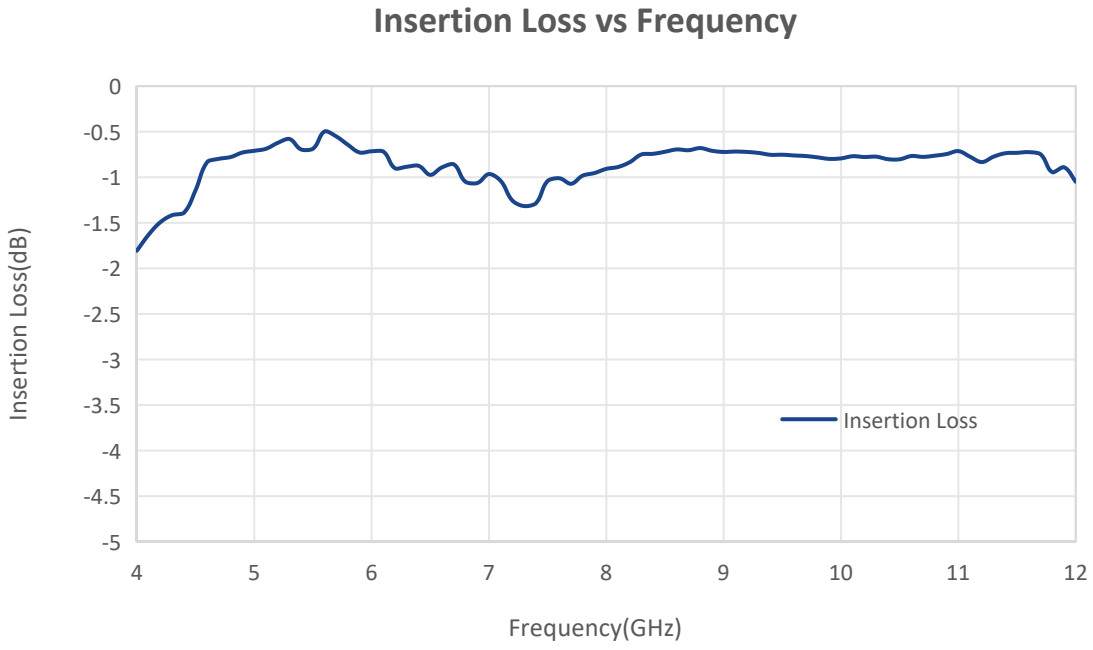


Port4 to Port5:

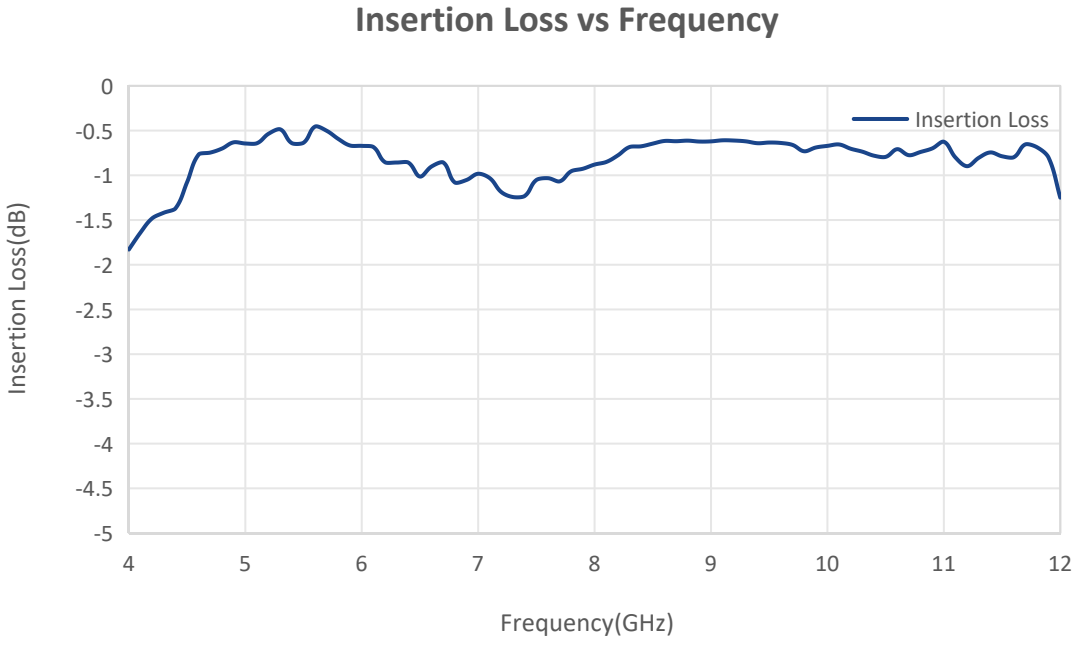


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data(TEM=77K):

Port5 to Port1:

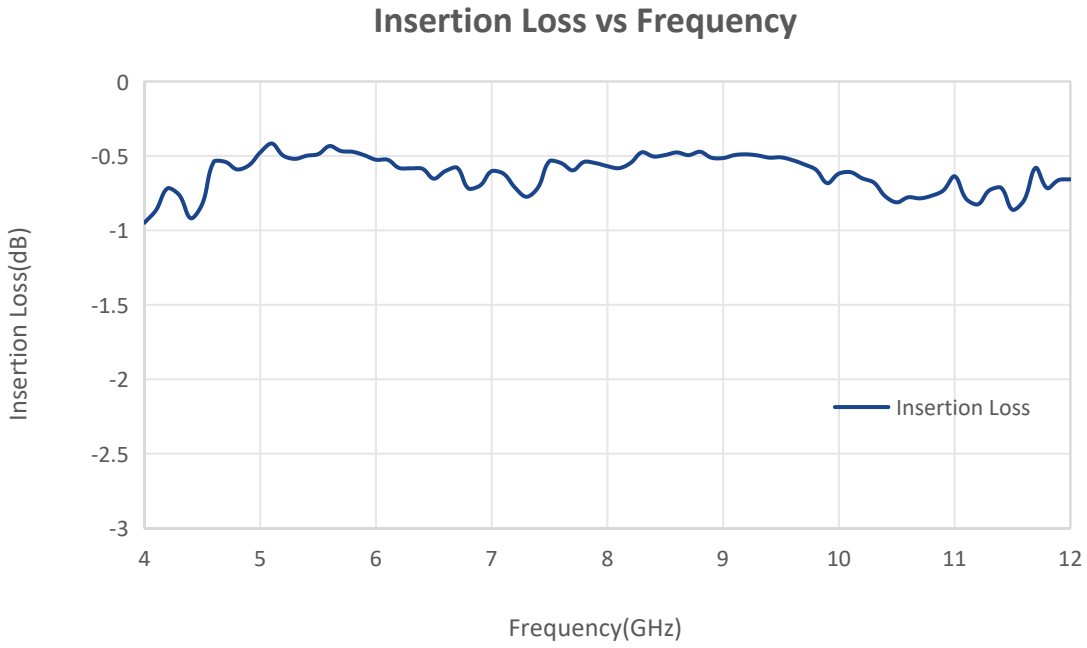


Port1 to Port2:

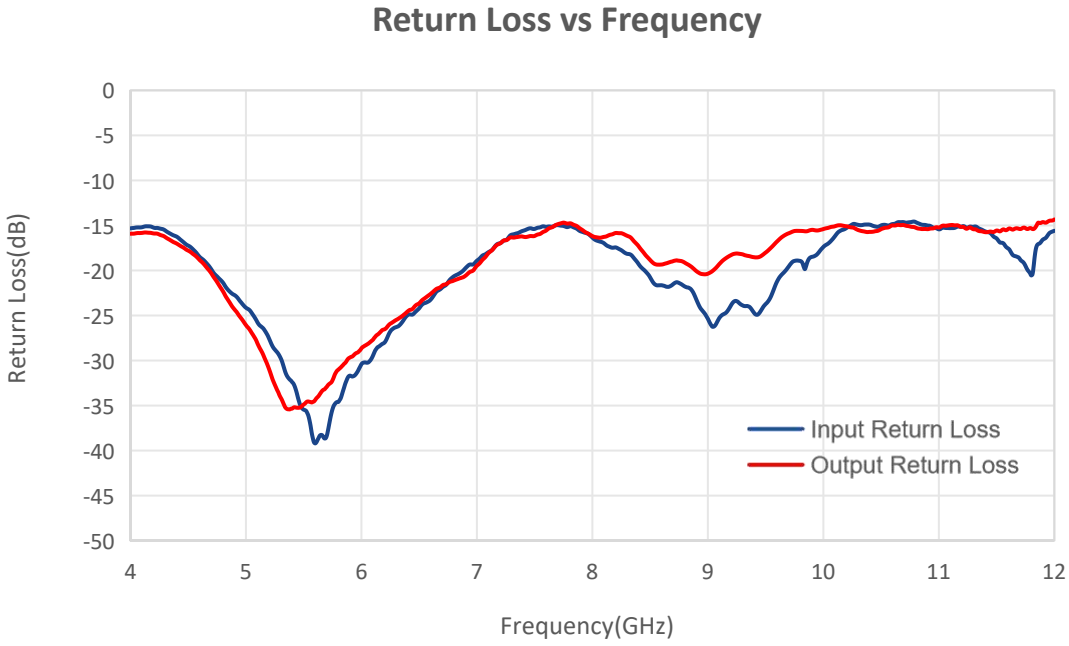


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data(TEM=77K):

Port2 to Port3:

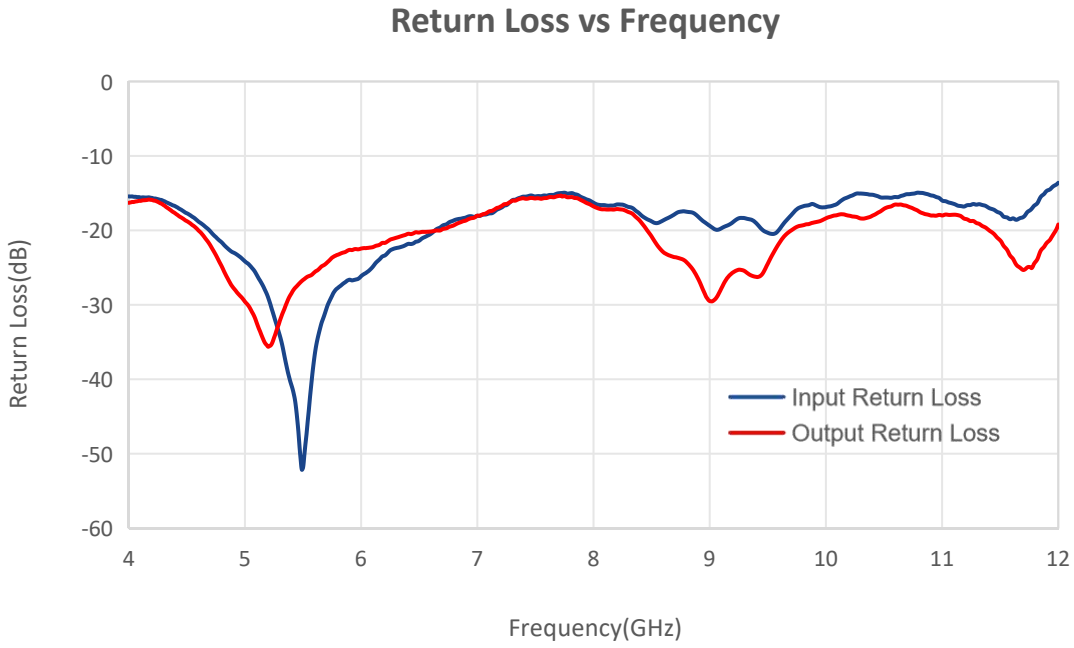


Port3 to Port4:

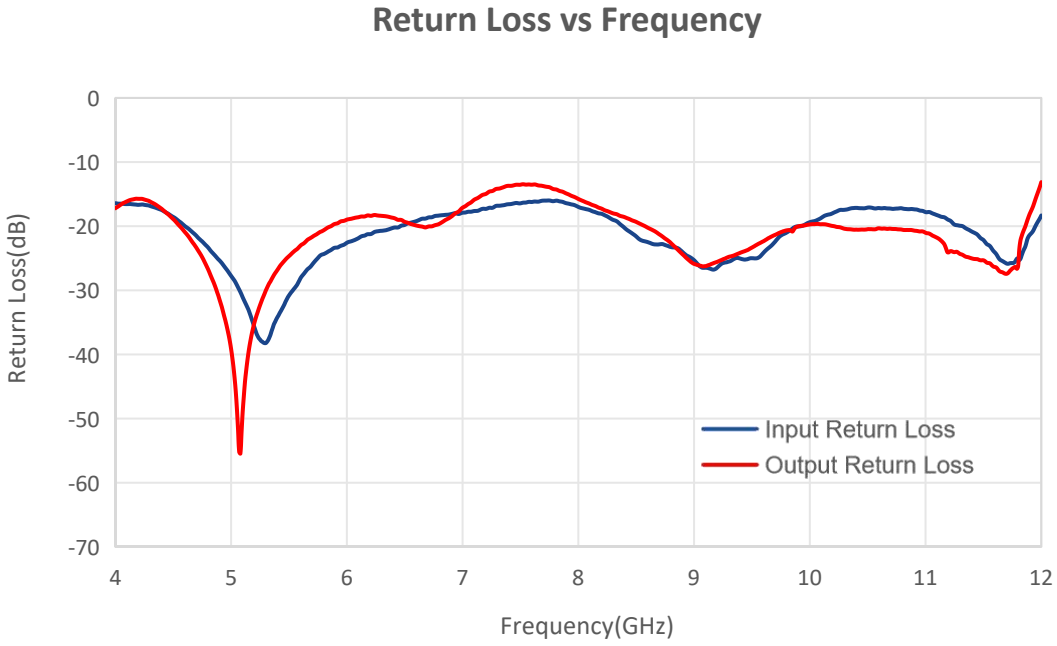


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data(TEM=77K):

Port4 to Port5:

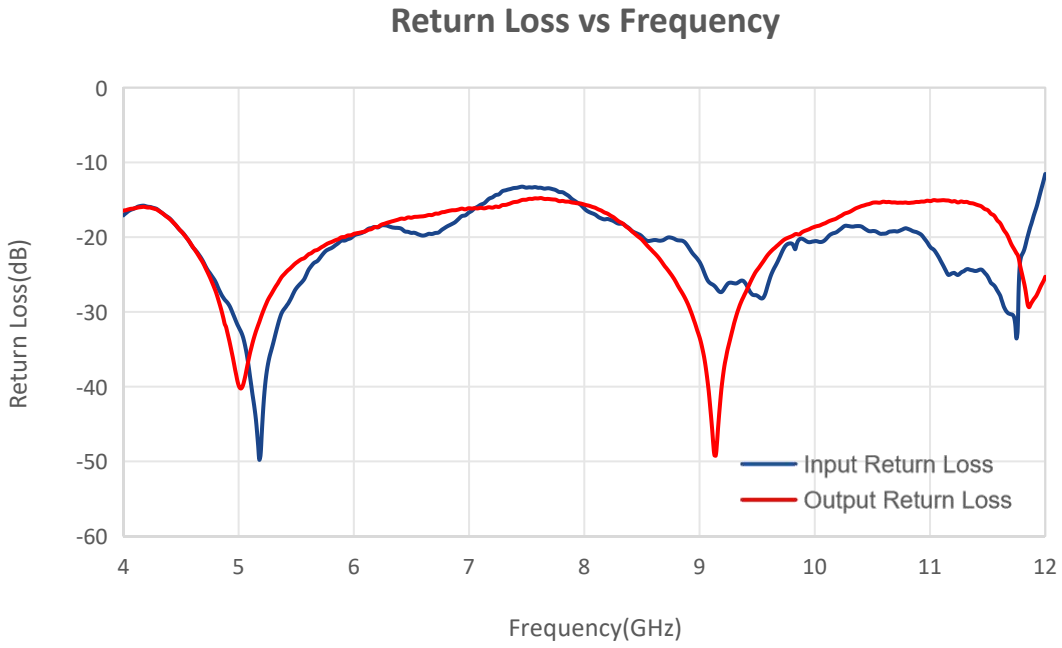


Port5 to Port1:

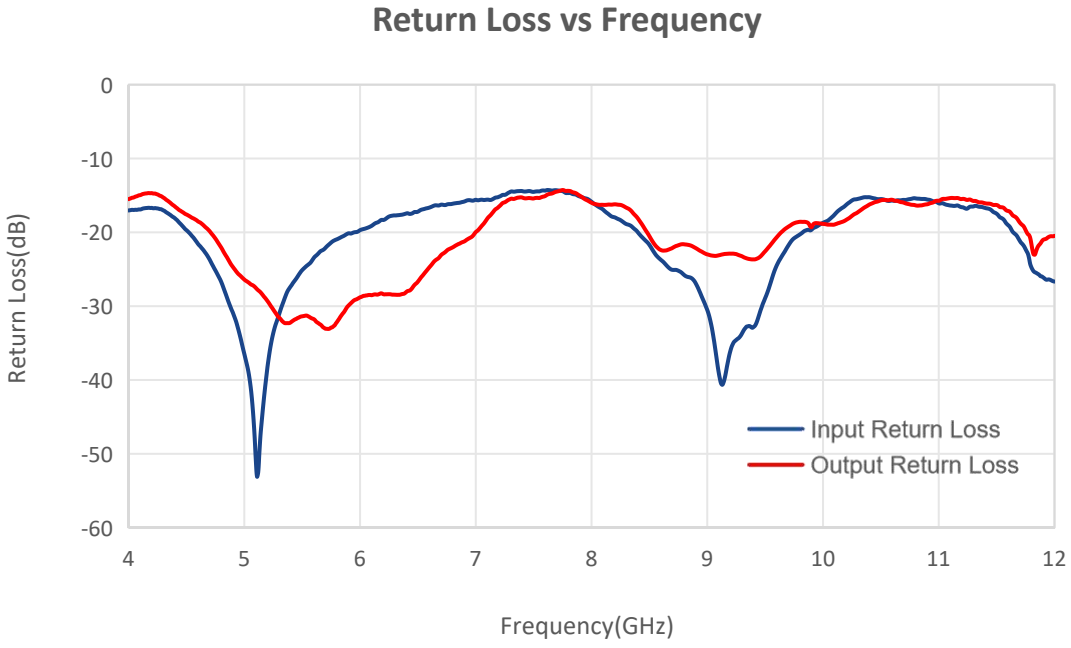


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data(TEM=77K):

Port2 to Port1:

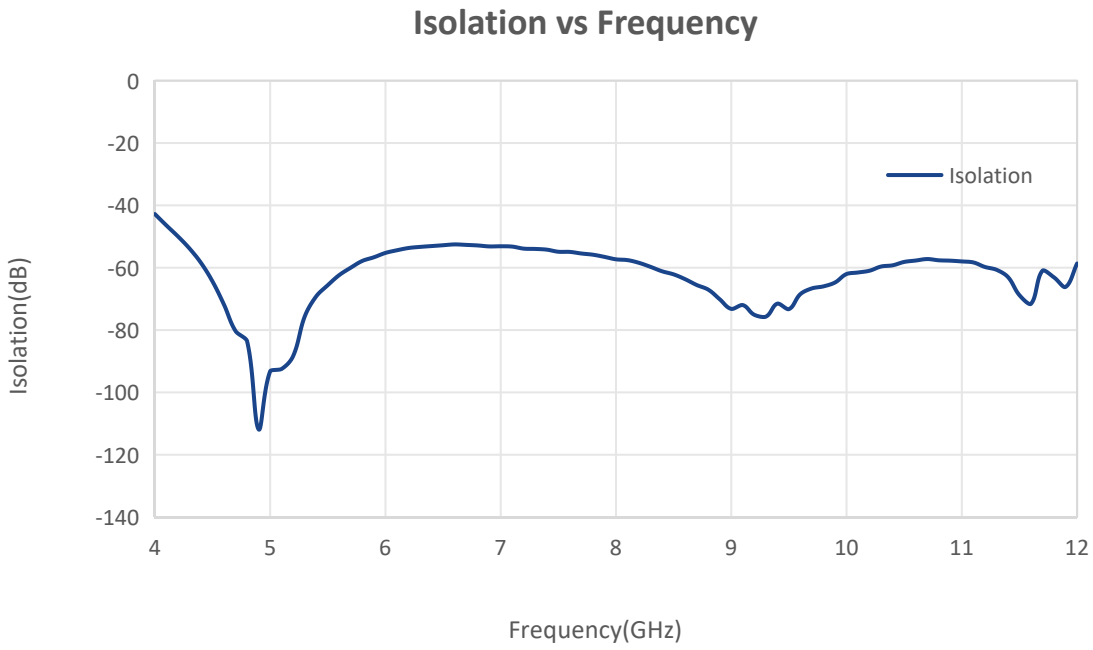


Port3 to Port2:

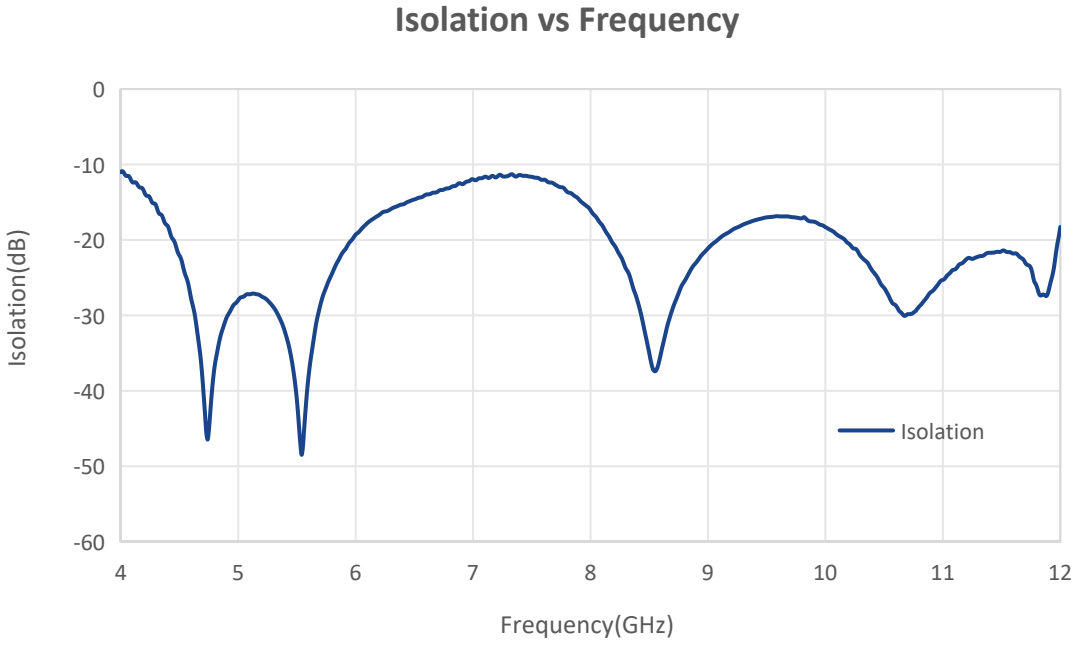


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data(TEM=77K):

Port4 to Port3:

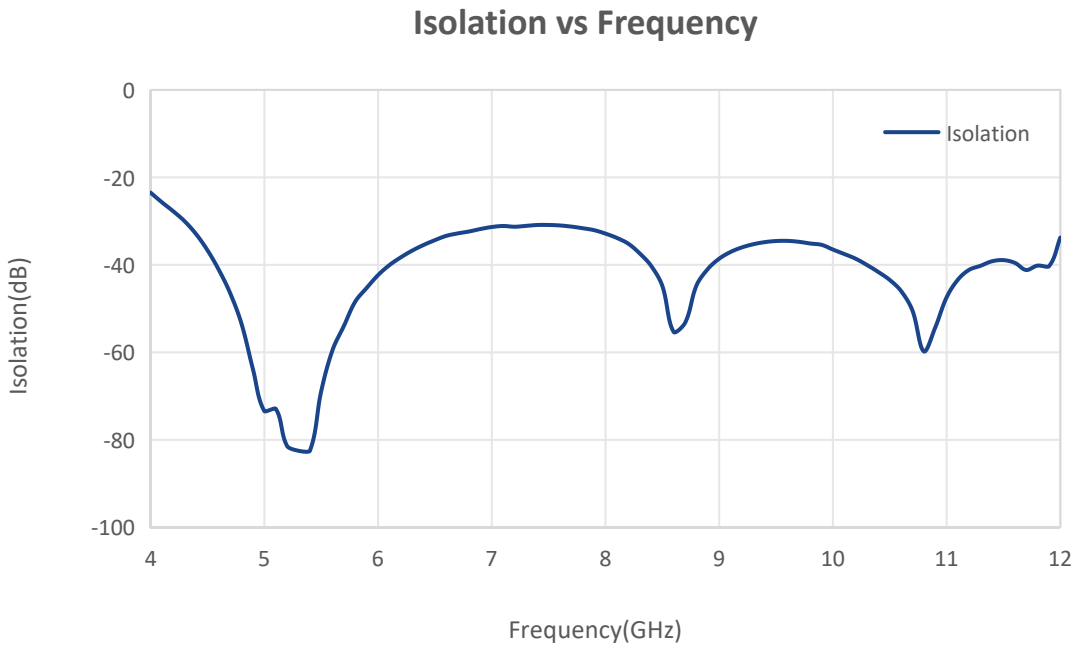


Port5 to Port4:

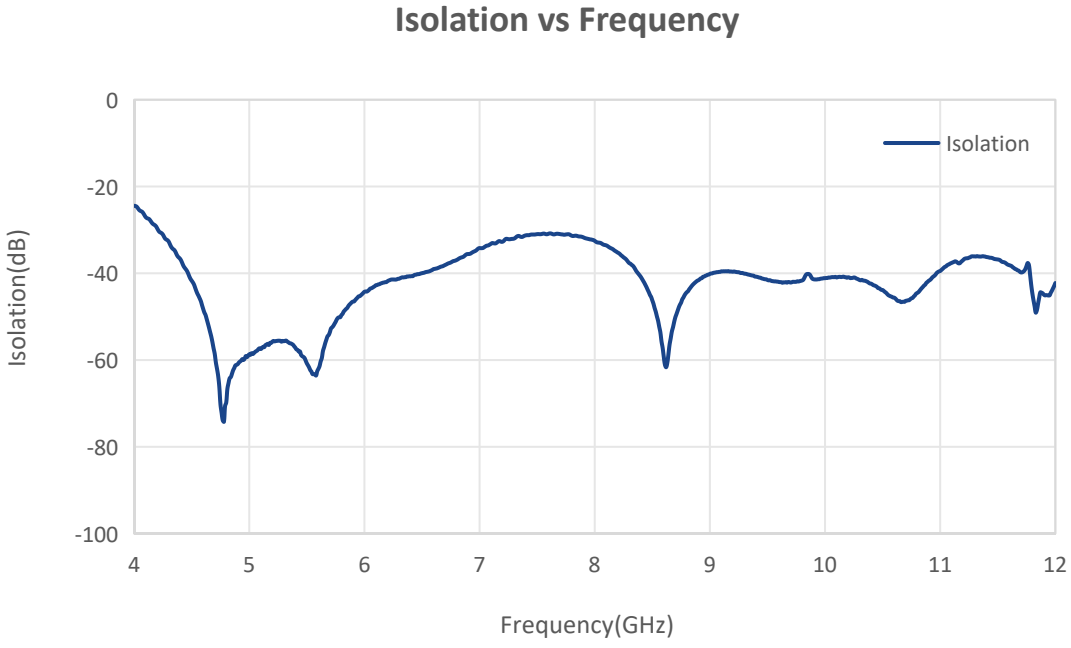

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data(TEM=77K):

Port1 to Port5:

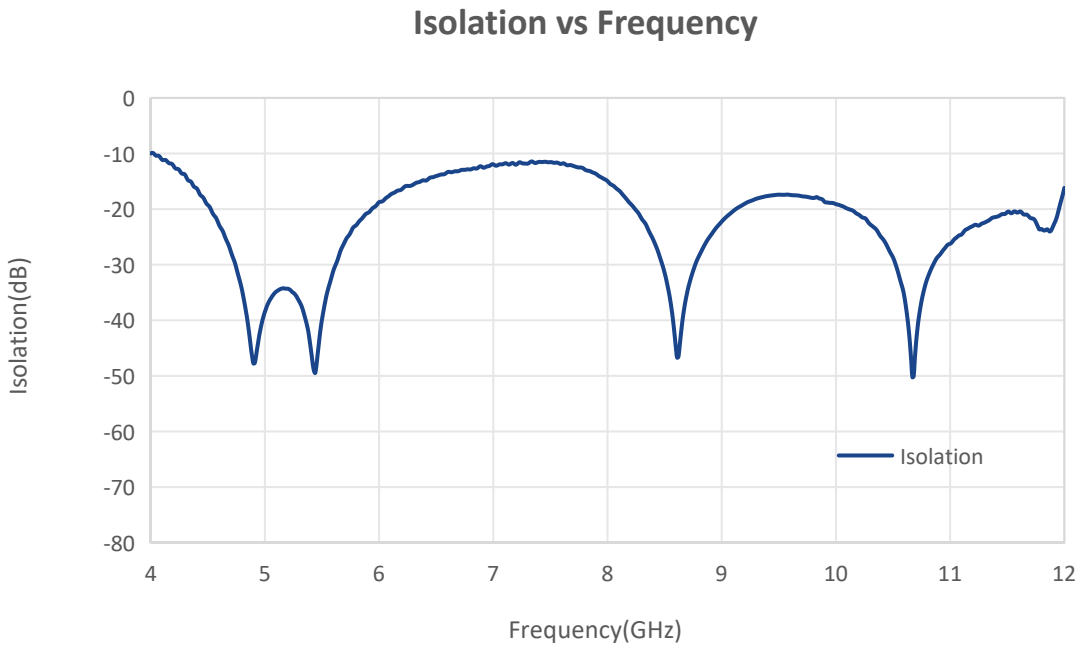

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.