泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Power Amplifier

80MHz-1GHz/48dB Gain/48dBm Psat Model: TLPA80M1000M-48-48

TLPA80M1000M-48-48 is a power amplifier with a minimum small signal gain of 48 dB and a minimum Psat of 48 dBm across the frequency range of 80MHz to 1GHz. The DC power requirement for the amplifier is +28 VDC/10 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 80MHz-1GHz
- Gain: 48dB Min
- Output Power Psat: 48dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	80MHz		1GHz	
小信号增益 Small Signal Gain	48	52		dB
增益平坦度 Gain Flatness		±2	±3	dB
线性输出功率 Output P1dB		46		dBm
饱和输出功率 Output Psat	48	48.5		dBm
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage		+28		V DC
直流电流 DC Supply Current		1.5	1.0	A
阻抗 Impedance		50		Ohms

*Performance may degrade below 300 MHz. Please refer to below typical test plots

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流供电接口 DC Power Supply Connector	D-SUB-9	
尺寸 Size	170*80*20	mm
重量 Weight	200	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+30 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



Simple 220V System
Available SAC option

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm



***Heat Sink Required During Operation

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+50	℃
存储温度 Non-operating Temperature*	-30		+60	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA80M1000M-48-48	Power amplifier 80MHz-1GHz, Gain:48dB,Psat:48dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA80M1000M-48-48-HS	Power amplifier 80MHz-1GHz, Gain:48dB,Psat:48dBm,+28V DC, With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

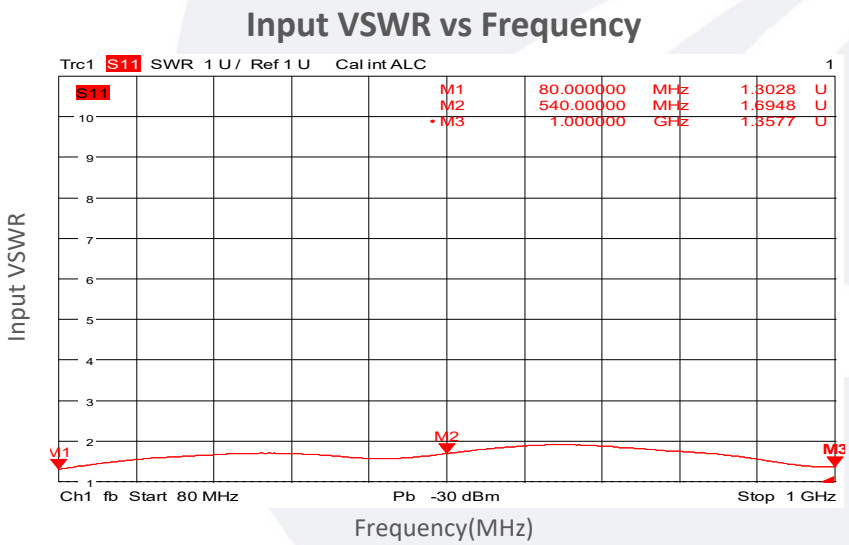

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

Small Signal Gain vs Frequency

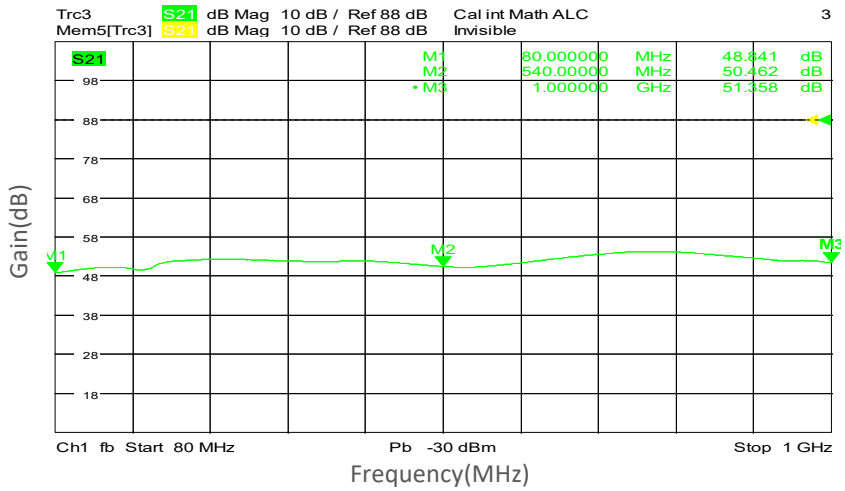

Gain vs Output Power

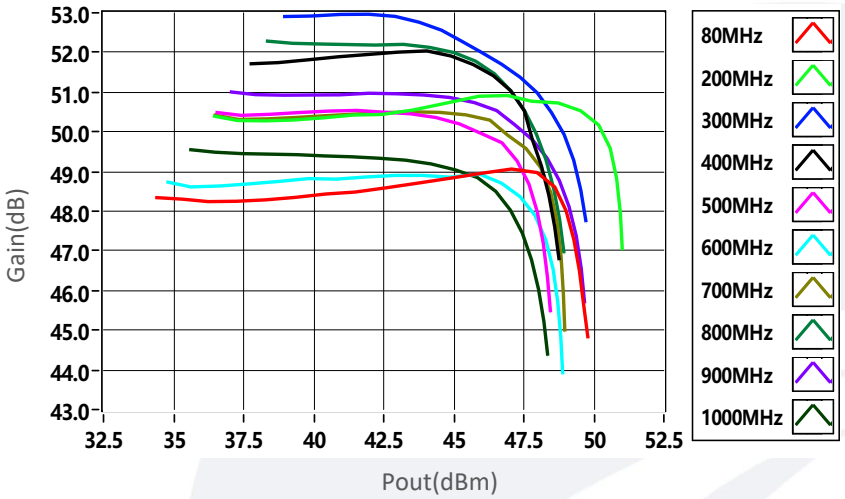

PndB vs Frequency

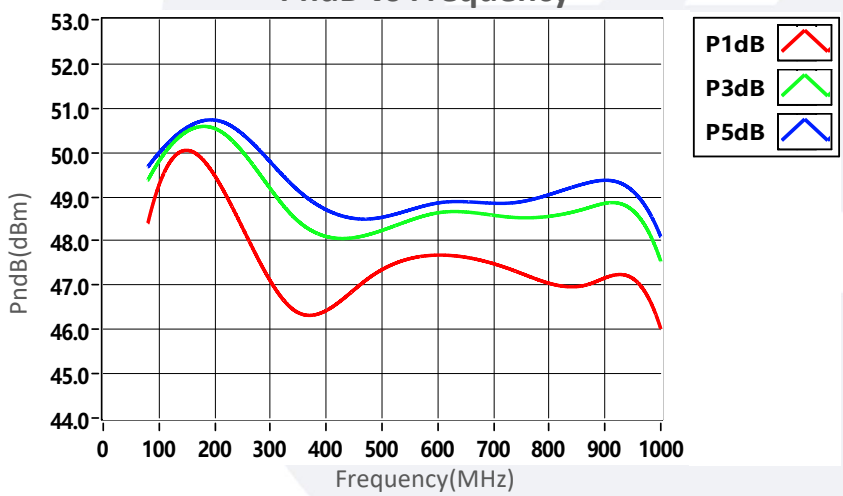

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

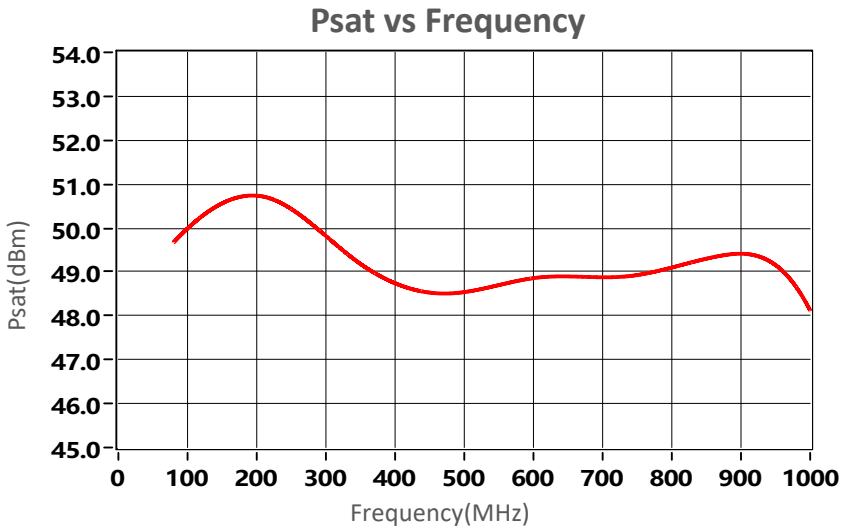

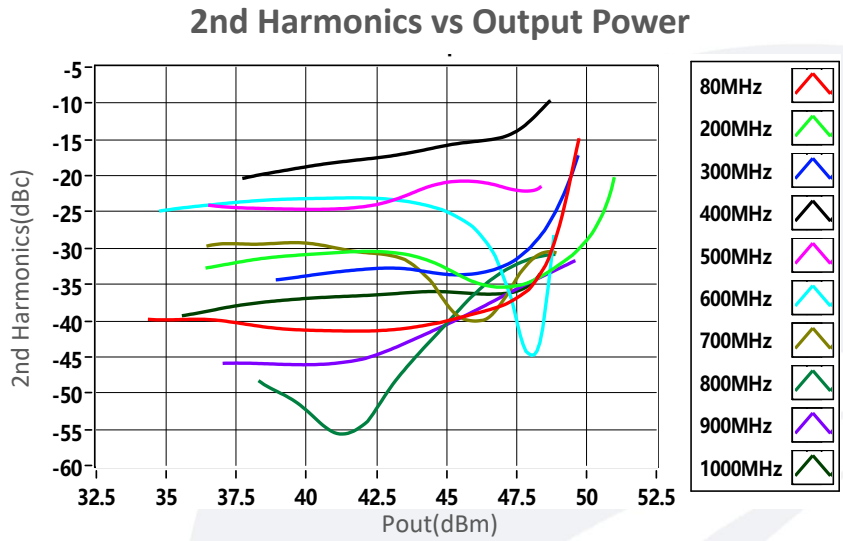

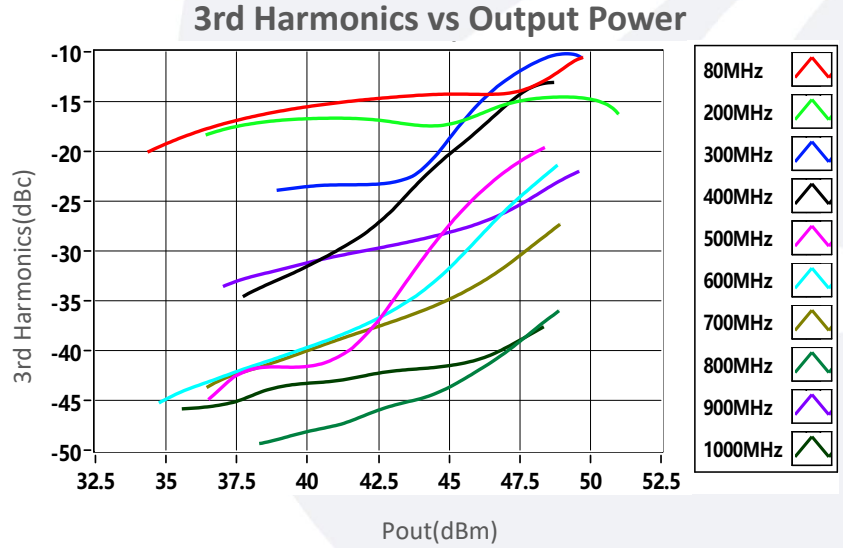

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.